



LEFT LANE CLOSURE

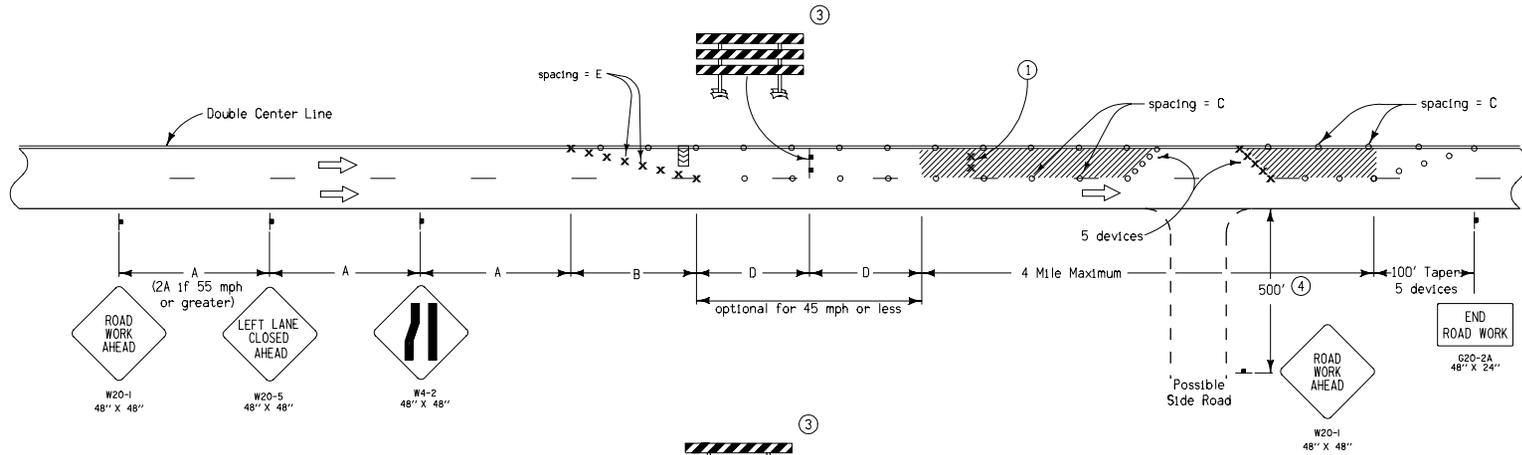

RIGHT LANE CLOSURE

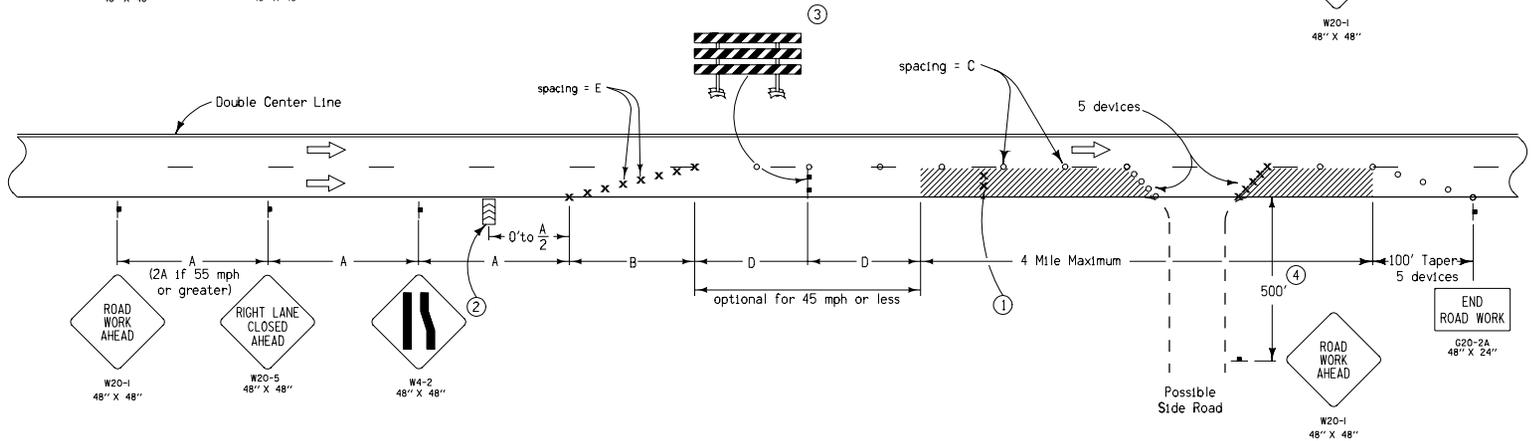

LEGEND

- T Traffic Sign
- X Drum
- o 42" Channelizer or Vertical Panel
- T Type III Barricade
- ▤ Arrow Panel
- ▨ Work Area
- ← Direction of Traffic

| SPEED LIMIT (mph) | A | B | C | D | E |
|-------------------|-------|------|-----|------|-----|
| 25 or less | 300' | 125' | 40' | 40' | 25' |
| 30 - 35 | 500' | 245' | 80' | 80' | 35' |
| 40 - 45 | 700' | 540' | 80' | 200' | 45' |
| 50 - 55 | 1000' | 770' | 80' | 280' | 55' |

- ① Two drums shall be placed in the closed lane at 500 ft. intervals. Where core-outs, holes or uncured concrete exist within the work area, additional drums shall be placed just ahead of each.
- ② When there is no shoulder area, the arrow panel shall be placed within the closed lane behind the channelizing devices and as close to the beginning of the taper as practical.
- ③ A vehicle with an amber revolving light or amber strobe light may be substituted for the Type III barricade.
- ④ Advanced warning distance may be reduced to 200 ft. when the side road speed limit is 40 mph or less.

Contract Item:
Traffic Control

| | |
|---|---------------|
| <p>Iowa Department of Transportation</p> | REVISION |
| | NEW 10-17-06 |
| STANDARD ROAD PLAN | TC-419 |
| REVISIONS: Replaces RS-64A and RS-64B. | SHEET 1 of 1 |
| <p>APPROVED BY DESIGN METHODS ENGINEER</p> | |
| <p>LANE CLOSURE ON UNDIVIDED HIGHWAY</p> | |