



SITUATION 2

Public cross-traffic maintained.
No access to project.

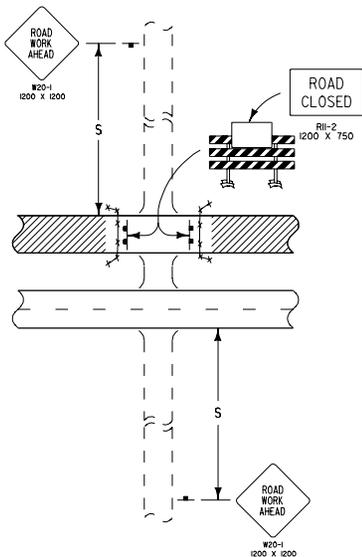


SITUATION 3

No access to project
(Applicable to T-Intersections)

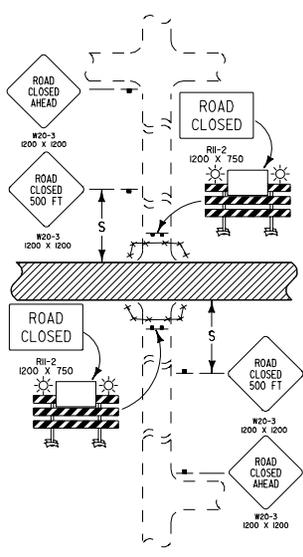


SITUATION 4

Public cross-traffic maintained.
No access to project.

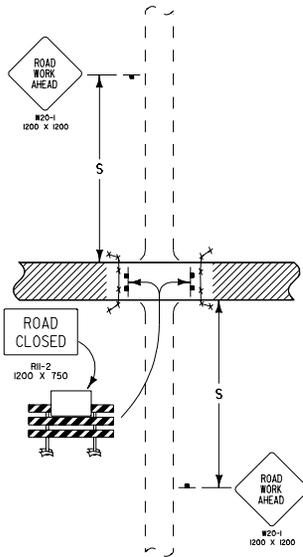


SITUATION 5

Public cross-traffic maintained.
Contractor and resident access.

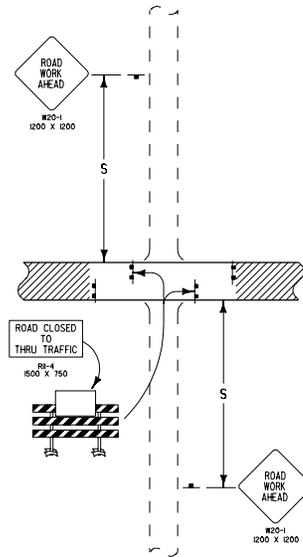

SITUATION 6

No public access. Contractor and resident
access only. (Applicable to T-Intersections)

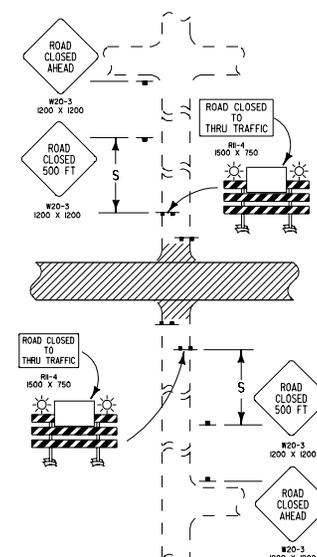

| | |
|----------|-------|
| Location | S |
| Urban | 60 m |
| Rural | 150 m |

LEGEND

- Traffic Sign
- Type III Barricade
- Orange Mesh Safety Fence
- Type 'A' Low-Intensity Flashing Warning Light
- Work Area

Contract Item:

Traffic Control
Safety Closures

Tabulation:

108-13A

All dimensions given in millimeters unless noted.

During suspension of work, (such as over winter):

- a) Two-lane to four-lane projects shall utilize Situation 2.
- b) Situation 5 is preferred where cross-traffic is maintained.

| | | |
|-----------------------------------|---|----------------------------------|
| M METRIC VERSION | <p>Iowa Department of Transportation</p> | REVISION NEW 10-17-06 |
| | | TC-252(2) SHEET 2 of 2 |
| | REVISIONS: Replaces RS-26A and RS-26B. | |
| | <p>APPROVED BY DESIGN METHODS ENGINEER</p> | |
| <p>ROAD CLOSURE</p> | | |