

INDEX FOR J24-06 STANDARDS:

| J24-01-06 | INDEX, GENERAL NOTES & GENERAL INFORMATION |
|-----------|---|
| J24-02-06 | SUPERSTRUCTURE DETAILS 70'-0" BRIDGE |
| J24-03-06 | SUPERSTRUCTURE DETAILS 70'-0" BRIDGE |
| J24-04-06 | SUPERSTRUCTURE DETAILS 80'-0" BRIDGE |
| J24-05-06 | SUPERSTRUCTURE DETAILS 80'-0" BRIDGE |
| J24-06-06 | SUPERSTRUCTURE DETAILS 90'-0" BRIDGE |
| J24-07-06 | SUPERSTRUCTURE DETAILS 90'-0" BRIDGE |
| J24-08-06 | SUPERSTRUCTURE DETAILS 100'-0" BRIDGE |
| J24-09-06 | SUPERSTRUCTURE DETAILS 100'-0" BRIDGE |
| J24-10-06 | SUPERSTRUCTURE DETAILS 110'-0" BRIDGE |
| J24-11-06 | SUPERSTRUCTURE DETAILS 110'-0" BRIDGE |
| J24-12-06 | SUPERSTRUCTURE DETAILS 120'-0" BRIDGE |
| J24-13-06 | SUPERSTRUCTURE DETAILS 120'-0" BRIDGE |
| J24-14-06 | SUPERSTRUCTURE DETAILS 130'-0" BRIDGE |
| J24-15-06 | SUPERSTRUCTURE DETAILS 130'-0" BRIDGE |
| J24-16-06 | SUPERSTRUCTURE DETAILS 140'-0" BRIDGE |
| J24-17-06 | SUPERSTRUCTURE DETAILS 140'-0" BRIDGE |
| J24-18-06 | SUPERSTRUCTURE DETAILS 150'-0" BRIDGE |
| J24-19-06 | SUPERSTRUCTURE DETAILS 150'-0" BRIDGE |
| J24-20-06 | SUPERSTRUCTURE DETAILS ALL BRIDGES |
| J24-21-06 | SUPERSTRUCTURE DETAILS ALL BRIDGES |
| J24-22-06 | SUPERSTRUCTURE DETAILS ALL BRIDGES |
| J24-23-06 | MONOLITHIC PIER CAP DETAILS ALL BRIDGES |
| J24-24-06 | MONOLITHIC PIER CAP DETAILS ALL BRIDGES |
| J24-25-06 | NON-MONOLITHIC PIER CAP DETAILS ALL BRIDGES |
| J24-26-06 | NON-MONOLITHIC PIER CAP DETAILS ALL BRIDGES |
| J24-27-06 | ABUTMENT DETAILS 0° SKEW - TIMBER PILING |
| J24-28-06 | ABUTMENT DETAILS 15° SKEW - TIMBER PILING |
| J24-29-06 | ABUTMENT DETAILS 30° SKEW - TIMBER PILING |
| J24-30-06 | ABUTMENT DETAILS 30° SKEW - TIMBER PILING |
| J24-31-06 | ABUTMENT DETAILS 45° SKEW - TIMBER PILING |
| J24-32-06 | ABUTMENT DETAILS 45° SKEW - TIMBER PILING |
| J24-33-06 | ABUTMENT DETAILS - TIMBER PILING |
| J24-34-06 | ABUTMENT DETAILS 0° SKEW - STEEL PILING |
| J24-35-06 | ABUTMENT DETAILS 15° SKEW - STEEL PILING |
| J24-36-06 | ABUTMENT DETAILS 30° SKEW - STEEL PILING |
| J24-37-06 | ABUTMENT DETAILS 45° SKEW - STEEL PILING |
| J24-38-06 | ABUTMENT DETAILS 45° SKEW - STEEL PILING |
| J24-39-06 | ABUTMENT DETAILS - STEEL PILING |
| J24-40-06 | OPEN BARRIER RAIL DETAILS |
| J24-41-06 | OPEN BARRIER RAIL DETAILS |
| J24-42-06 | SUBDRAIN DETAILS |
| J24-43-06 | WING ARMORING & MACADAM STONE DETAILS |

DESIGNER NOTES AND DESIGN CONSIDERATIONS

THESE J24-06 BRIDGE DESIGN STANDARDS PROVIDE THE STRUCTURAL DETAILS TO ENABLE CONSTRUCTION OF A 24'-0" ROADWAY, 3 SPAN CONTINUOUS CONCRETE SLAB BRIDGE. DETAILS AND QUANTITIES ARE PROVIDED FOR:

1. NINE BRIDGE LENGTHS: 70' THRU 150' IN 10'-0" MULTIPLES.
2. FOUR SKEWS: 0°, 15°, 30° & 45°.
3. INTEGRAL TYPE ABUTMENTS.
4. TWO TYPES OF PIER CAPS.

SKREW DETAILS ARE DRAWN FOR RIGHT-AHEAD SKEWS, BUT ALL DETAILS AND DIMENSIONS ARE IDENTICAL FOR LIKE LEFT-AHEAD SKEWS. THESE BRIDGES MAY BE BUILT ON ANY PERMISSIBLE GRADE (FLAT, SLOPED OR VERTICAL CURVED).

THESE STANDARDS GIVE MOST OF THE INFORMATION NECESSARY TO BUILD THESE BRIDGES. HOWEVER, THE FOLLOWING ADDITIONAL INFORMATION IS REQUIRED FOR USE ON PRIMARY ROUTES. FOR SECONDARY ROUTES THE ENGINEER MAY NOT REQUIRE ALL SHEETS TO BE PROVIDED:

1. TITLE SHEET WITH ENGINEERS SEAL
2. ESTIMATED QUANTITIES TOTALS INCLUDING CLASS 20 EXCAVATION FOR BRIDGE
3. SITUATION PLAN LAYOUT OF BRIDGE
4. TOP OF SLAB ELEVATIONS LAYOUT
5. BOTTOM OF ABUTMENT FOOTING ELEVATIONS
6. BOTTOM OF PIER CAP ELEVATIONS
7. PILING DESIGN INFORMATION
8. SLOPE PROTECTION LAYOUT IF NEEDED
9. CONDUIT LAYOUT
10. LIGHTING LAYOUT IF NEEDED

THESE BRIDGES ARE DESIGNED IN ACCORDANCE WITH THE AASHTO LRFD BRIDGE DESIGN SPECIFICATION SERIES OF 2004.

CONCRETE f_c 's = 3500 PSI.
 REINFORCING STEEL f_y = 60,000 PSI (GRADE 60)
 n = 9 FOR TENSION STEEL
 n = 18 FOR COMPRESSION STEEL
 HL-93 LIVE LOAD PLUS 20 LBS. PER SQ. FT. FOR FUTURE WEARING SURFACE.
 END SPAN LENGTH IS USED TO CALCULATE EQUIVALENT WIDTH IN LIVE LOAD DISTRIBUTION.

CONTROL OF CRACKING BY DISTRIBUTION OF REINFORCEMENT FOR SLAB DESIGN BASED ON PRE LRFD 2005 INTERIMS.

PILING HAVE BEEN DESIGNED IN ACCORDANCE WITH AASHTO STANDARD SPECIFICATIONS FOR HIGHWAY BRIDGE SERIES OF 2002, USING SERVICE LOAD DESIGN METHOD (ALLOWABLE STRESS DESIGN).

HS25 LIVE LOAD PLUS 20 LBS PER SQ. FT. FOR FUTURE WEARING SURFACE.

PREBORE HOLES SHALL BE PROVIDED FOR ABUTMENT PILES FOR THE 140 FOOT AND 150 FOOT BRIDGES. THE PREBORED HOLES SHALL BE A MINIMUM OF 10 FEET BELOW THE BOTTOM OF THE FOOTING. THE PREBORED HOLES SHALL BE IN ACCORDANCE WITH SECTION 2501.19 OF THE STANDARD SPECIFICATIONS. THE ELEVATION OF THE BOTTOM OF THE PREBORED HOLES SHALL BE SHOWN ON THE PLANS.

THE TOP $\frac{1}{2}$ INCH OF THE SLAB IS CONSIDERED TO BE AN INTEGRAL WEARING SURFACE.

THE DEAD LOAD OF THE BARRIER RAIL IS SPREAD OVER ENTIRE SLAB EXCEPT IN THE DESIGN OF THE EDGE BEAM WHERE 50% OF THE RAIL WEIGHT IS ASSUMED TO BE CARRIED BY THE EDGE BEAM.

SLAB MOMENTS DUE TO PASSIVE EARTH PRESSURE ON THE ABUTMENTS ARE CONSIDERED.

IF ROCK IS ENCOUNTERED LESS THAN 12 FEET BELOW BOTTOM OF ABUTMENT FOOTING, SPECIAL ANALYSIS MAY BE REQUIRED.

THIS STANDARD IS NOT DESIGNED SO THAT ADDITIONAL INTERIOR SPANS MAY BE ADDED WITHOUT CAUSING SOME OVERSTRESSES.

CLASS 20 EXCAVATION WILL BE REQUIRED TO CONSTRUCT THE INTEGRAL ABUTMENTS. THE QUANTITIES FOR CLASS 20 ARE NOT INCLUDED ON THESE SHEETS, BUT SHALL BE CALCULATED AND INCLUDED IN THE FINAL PLANS.

FOR PIERS SUBJECT TO SCOUR THE DESIGN BEARING SHALL BE OBTAINED BELOW SCOUR ELEVATION. SCOUR ELEVATION SHALL BE SHOWN ON THE SITUATION PLAN.

3" WING PVC PIPE IS INCIDENTAL TO STRUCTURAL CONCRETE.


SPECIFICATIONS

DESIGN:
 SUBSTRUCTURE: AASHTO, SERIES OF 2002.
 SUPERSTRUCTURE: AASHTO LRFD, SERIES OF 2004 WITH INTERIM 2005.

CONSTRUCTION:
 IOWA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR HIGHWAY AND BRIDGE CONSTRUCTION, SERIES 2001, PLUS APPLICABLE GENERAL SUPPLEMENTAL SPECIFICATIONS, DEVELOPMENTAL SPECIFICATIONS, SUPPLEMENTAL SPECIFICATIONS AND SPECIAL PROVISIONS SHALL APPLY TO CONSTRUCTION WORK ON THIS PROJECT.

THESE BRIDGE PLANS LABEL ALL REINFORCING STEEL WITH ENGLISH NOTATION (50# IS $\frac{5}{8}$ INCH DIAMETER BAR). ENGLISH REINFORCING STEEL RECEIVED IN THE FIELD MAY DISPLAY THE FOLLOWING "BAR DESIGNATION". THE "BAR DESIGNATION" IS THE STAMPED IMPRESSION ON THE REINFORCING BARS, AND IS EQUIVALENT TO THE BAR DIAMETER IN MILLIMETERS.

| ENGLISH SIZE | BAR DESIGNATION |
|--------------|-----------------|
| 3 | 10 |
| 4 | 13 |
| 5 | 16 |
| 6 | 19 |
| 7 | 22 |
| 8 | 25 |
| 9 | 29 |
| 10 | 32 |
| 11 | 36 |

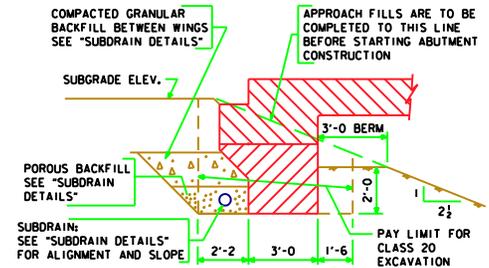

ABUTMENT EXCAVATION DETAILS
 SECTION NORMAL TO $\frac{1}{2}$ ABUT. BRG.

| | | |
|----------------------|--|--|
| LATEST REVISION DATE |  APPROVED BY BRIDGE ENGINEER |  Iowa Department of Transportation Highway Division |
| | | STANDARD DESIGN - 24' ROADWAY, 3 SPAN BRIDGES CONTINUOUS CONCRETE SLAB BRIDGES NOVEMBER, 2006 |
| | | INDEX, GENERAL NOTES & GENERAL INFORMATION |
| | | J24-01-06 |