



ELEVATION VIEW

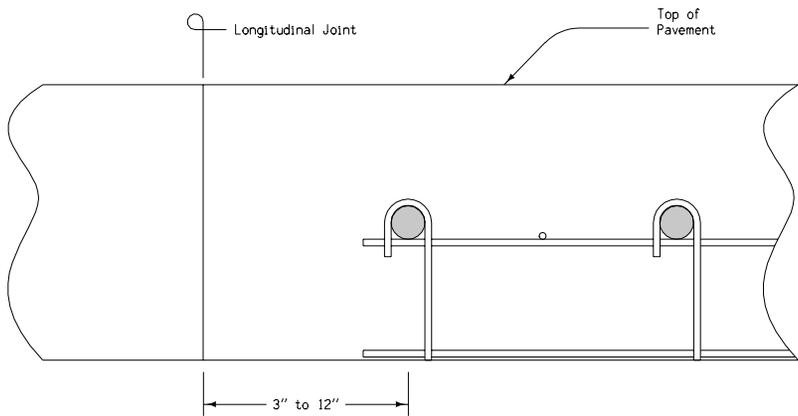

ELEVATION VIEW

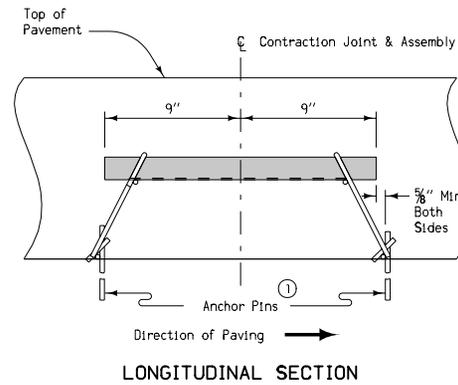

LONGITUDINAL SECTION

GENERAL NOTES:

Details indicated on this plan apply to both transverse contraction and expansion joints. For additional details, see Standard Road Plan RH-50 and RH-52.

- ① Per lane width, a minimum of (8) anchor pins evenly spaced (4 per side), to prevent movement of assembly during construction. Assemblies placed on pavement or PCC base shall be anchored with devices approved by the Engineer.

 Iowa Department of Transportation Highway Division	
<b>STANDARD ROAD PLAN RH-58</b>	
REVISION: Revise note number 1.	REVISION NO. 1
<i>William J. Stein</i> APPROVED BY DESIGN METHODS ENGINEER	REVISION DATE 04-20-04
<b>DOWEL ASSEMBLY          PLACEMENT DETAILS</b>	