




REACT 350

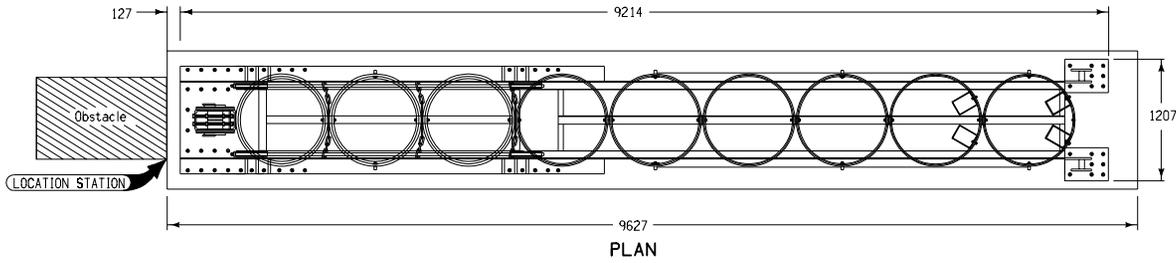


ELEVATION

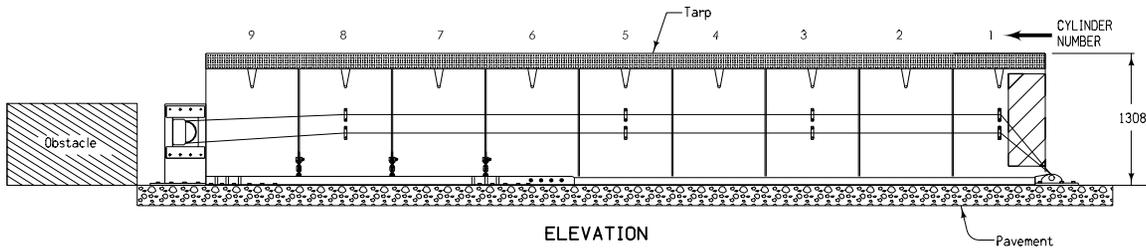

SCI100GM

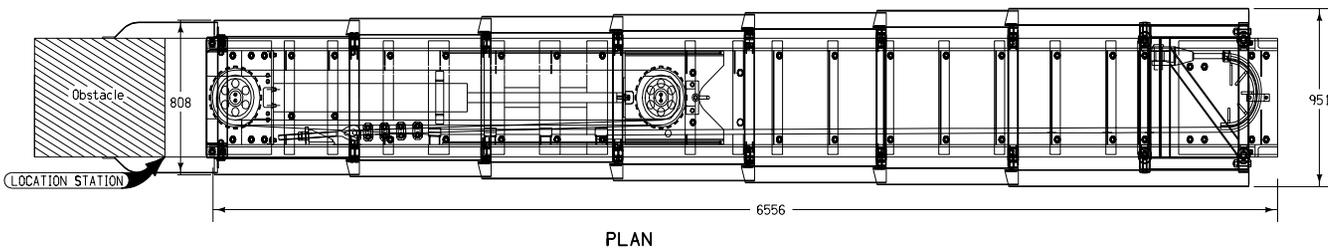

ELEVATION

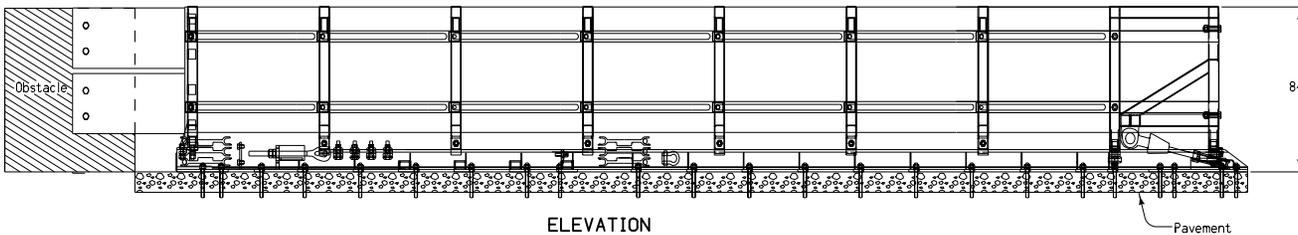

Approaching the work zone, a NCHRP Report 350, Test Level 3 (100 km/hr) unit shall be used, as shown on this sheet.

Within the work zone, a 90 km/hr unit may be used. Contact the manufacturer for details.

Depending on how traffic is staged, the same temporary attenuator may be used at more than one location. Because of this, the total number of attenuators needed may be less than the number of locations tabulated.

Contract Item:

Temporary Attenuators, Redirective (R)

Tabulation: 108-30

All dimensions given in millimeters unless noted.

M METRIC VERSION		
	STANDARD ROAD PLAN RE-86(1)	
	REVISION: NEW. Replaces Standard Road Plan RE-73.	REVISION NO. NEW
	APPROVED BY <i>William J. Stein</i> DESIGN METHODS ENGINEER	REVISION DATE 10-18-05
TEMPORARY ATTENUATORS REDIRECTIVE (Sheet 1 of 2)		