




SECTION A-A

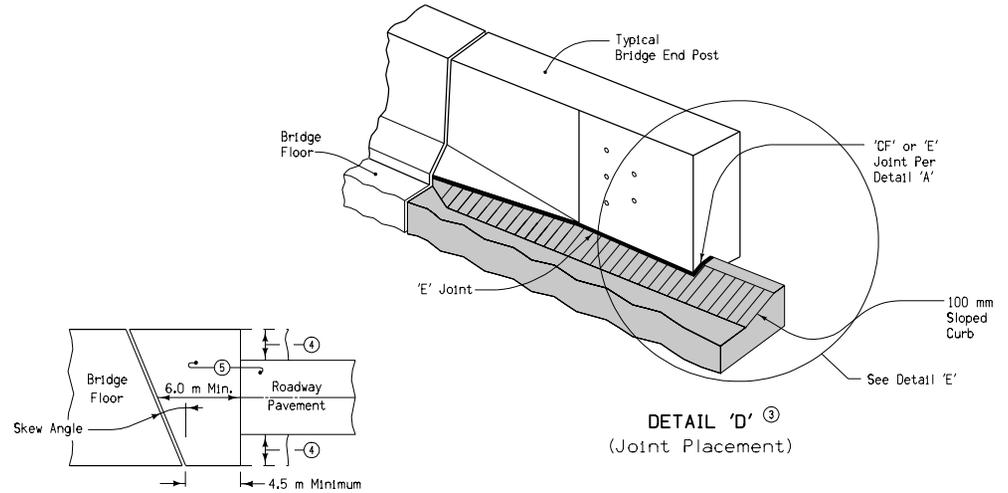


DETAIL 'D' (Joint Placement)

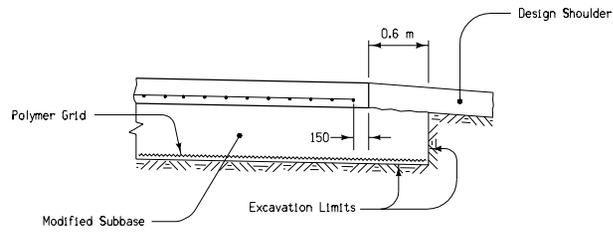


SECTION B-B

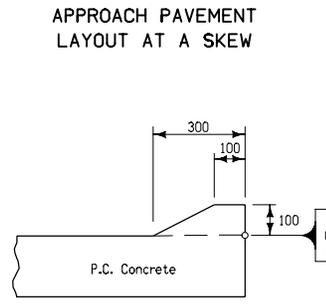

100 mm SLOPED CURB

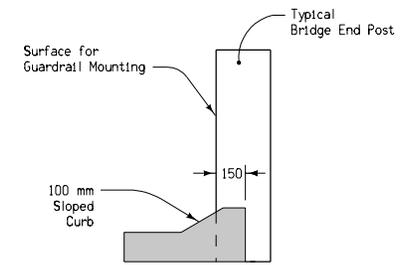

DETAIL 'E' (Back of Curb Placement)

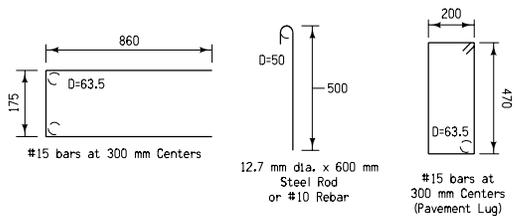

BENT BAR SHAPES

- ① Build 100 millimeter Sloped Curb, unless noted otherwise in the plan.
- ② Longitudinal Joint: (Standard Road Plan RH-51)
Single Pour - Saw cut joint per detail B.
Two Pours - Use 'KS-2' Joint.
- ③ See Standard Road Plans RK-21, RK-22, or RK-23.
- ④ Design shoulder width.
- ⑤ Reinforced bridge approach section.

All dimensions given in millimeters unless noted.

M METRIC VERSION		
	STANDARD ROAD PLAN RK-20(3)	
	REVISION: Add 100 mm sloped curb detail.	REVISION NO. 2
	APPROVED BY <i>William J. Stein</i> DESIGN METHODS ENGINEER	REVISION DATE 10-18-05
DOUBLE REINFORCED 300 mm APPROACH (Sheet 3 of 3)		