
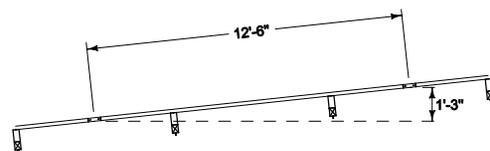


Install delineators and object markers according to SI-211.

For grading requirements, see RL-14A.

For general guardrail details, see BA-200.

① See BA-205.

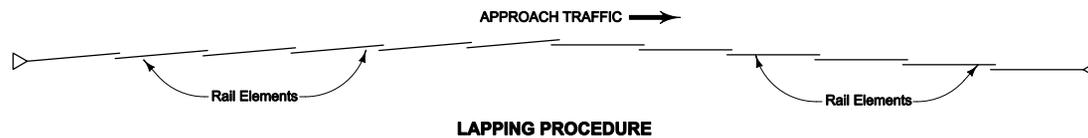

Possible Contract Items:  
Steel Beam Guardrail  
Steel Beam Guardrail End Terminal

Possible Tabulation:  
108-8B

<p>Iowa Department of Transportation</p>	REVISION New 04-20-10	
	<p><b>STANDARD ROAD PLAN</b></p>	
<p>REVISIONS: New. Replaces RE-54A.</p>		<p><b>BA-251</b></p>
<p>APPROVED BY DESIGN METHODS ENGINEER</p> <p><i>Deanna Maifeld</i></p>		<p>SHEET 1 of 1</p>
<p><b>STEEL BEAM GUARDRAIL INSTALLATION AT SIDE OBSTACLE (TWO-WAY PROTECTION)</b></p>		