For use on ground mounted or overhead signs.

Background for U.S. and Iowa Route Markersshall be smooth silver reflective sheeting. Route Marker numerals shall be black non-reflective sheeting

Dimensions shall be to the nearest 3.2 mm.

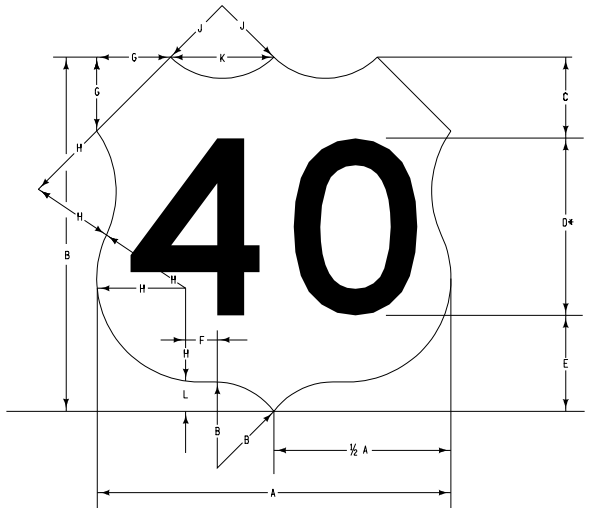

* Optically space numerals about vertical centerline

SIGN	DIMENSIONS (INCHES)										
	A	B	C	D	E	F	G	H	J	K	L
1,2-Digits	610	610	140	300D	170	25	125	180	130	180	50
1,2-Digits	910	910	210	350D	250	38	190	270	190	270	75
3-Digits	760	610	140	300D	170	100	130	180	230	250	50
3-Digits	1140	910	210	350D	250	140	190	270	340	380	75

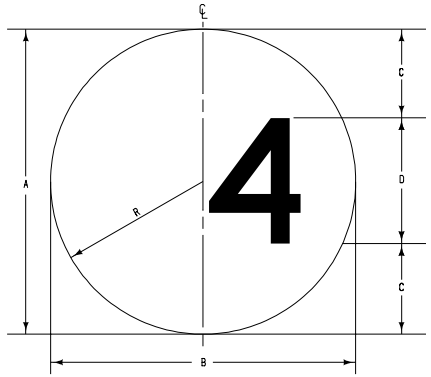

	150 mm Numerals		250 mm Numerals 300 mm Numerals		300 mm Numerals 380 mm Numerals		380 mm Numerals 460 mm numerals	
A	410		610		760		920	
B	410		610		760		920	
C	130		180		230		270	
D	1 or 2 digits	3 digits	1 or 2 digits	3 digits	1 or 2 digits	3 digits	1 or 2 digits	3 digits
	150 D	150 C	300 D	250 D	375 D	300 D	450 D	375 C
R	205		305		380		460	

All dimensions are given in metric unless noted.

M

METRIC VERSION

Iowa Department of Transportation

STANDARD ROAD PLAN

REVISION	
1	10-17-06

RD-43

SHEET 1 of 1

REVISIONS: Remove rivet hole information.

Deanna Maifield

APPROVED BY DESIGN METHODS ENGINEER

U.S. & STATE ROUTE MARKERS FOR TYPE 'B' GUIDE SIGNS