
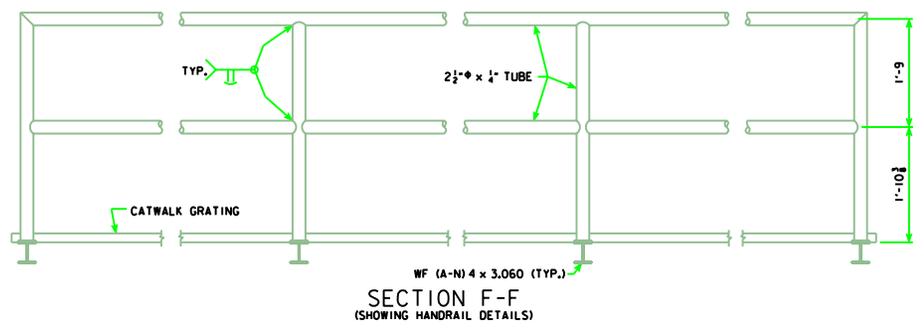
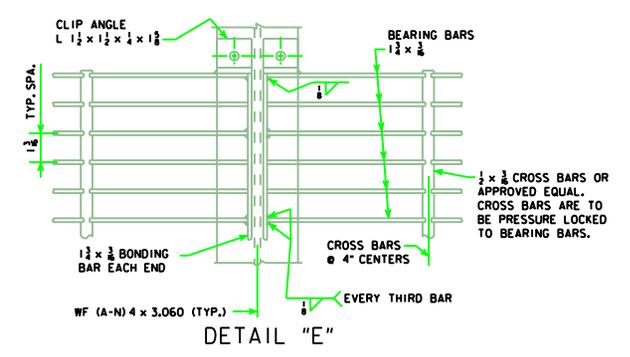


NOTE: 1/8" HOLE IN CLIP ANGLE AND 1/8" HOLE IN WF (A-N) 4 x 3.060 (ALUMINUM) FOR 3/8" STAINLESS STEEL BOLT. ADJUST CLIP SO GRATING BEARS ON BEAM.

NOTE: THE FOLLOWING ALUMINUM ALLOYS ARE TO BE USED IN THE FABRICATION OF CATWALK GRATING AND HANDRAIL:

CATWALK GRATING:
 BEARING BARS - 6061-T6
 CROSS BARS - 6063-T5 OR 6061-T6
 HANDRAILS:
 2 1/2" TUBE - 6061-T6

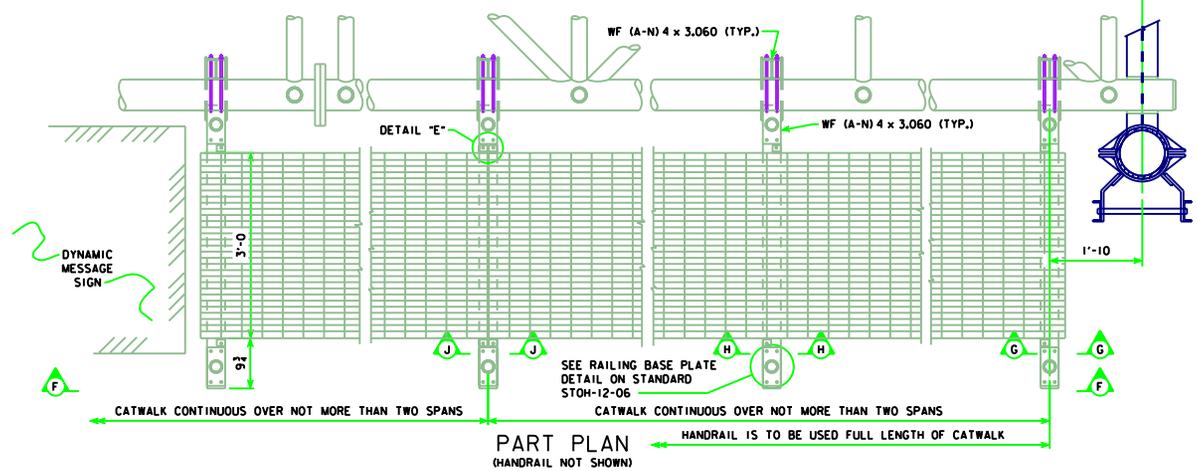

LATEST REVISION DATE <i>Thomas E. McQuinn</i> APPROVED BY BRIDGE ENGINEER		
	STANDARD DESIGN ALUMINUM OVERHEAD SIGN TRUSS WITH GALVANIZED STEEL SUPPORTS FEBRUARY, 2006	
	CATWALK (ALUMINUM) DETAILS 50' TO 100' SPANS	STO-11-06 DMS