


URBAN STANDARD SPECIFICATIONS for PUBLIC IMPROVEMENT MANUAL

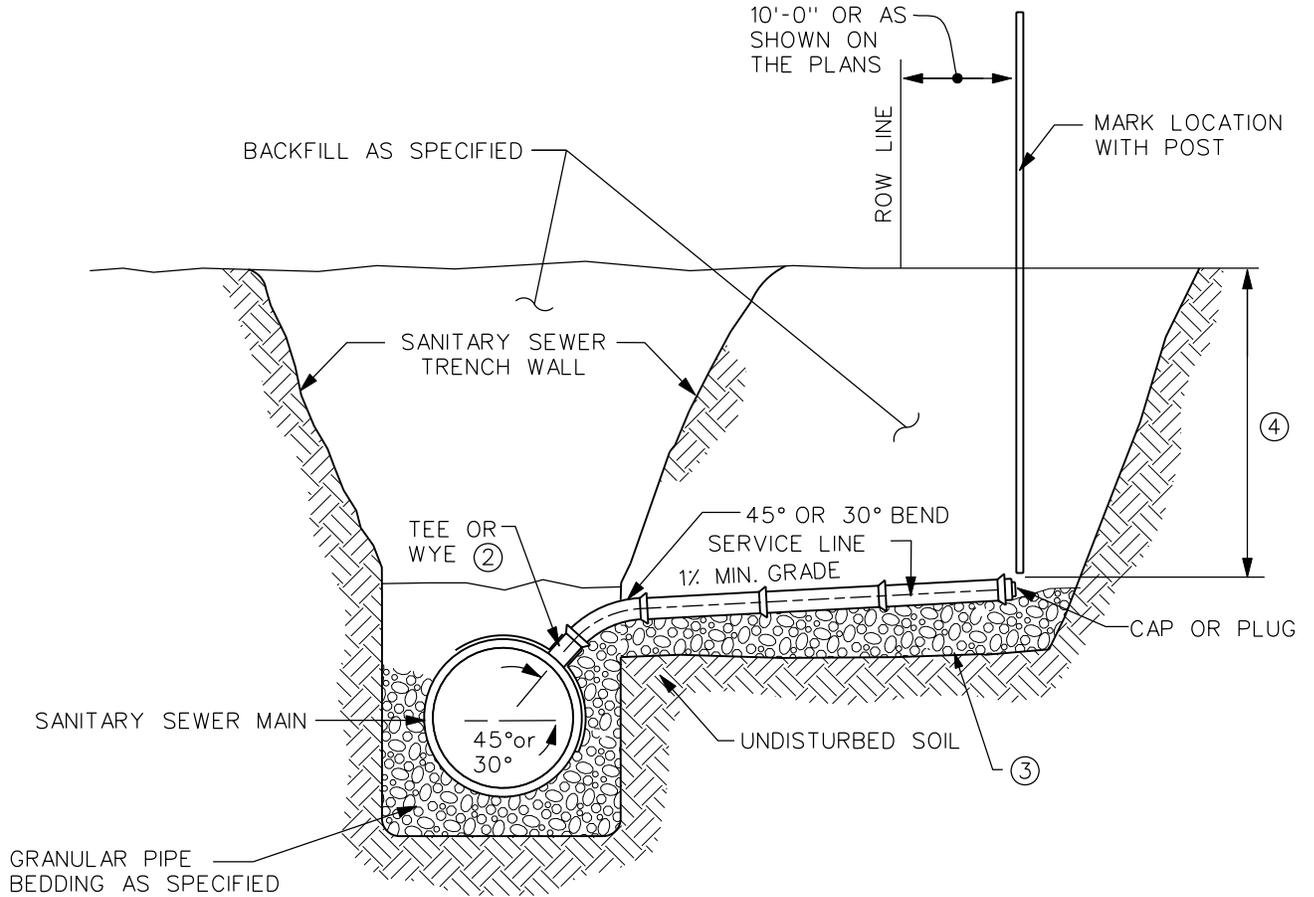

NOTES:

- ① USE FOR SERVICE CONNECTION WHEN SANITARY SEWER DEPTH IS 12 FT. OR LESS.
- ② NEW SEWER MAIN (EXCEPT RCP): MANUFACTURED, PREFORMED OR PRECAST WYE OR TEE. EXISTING SEWER MAIN AND ALL RCP: PREFORMED SADDLE WYE OR SADDLE TEE COMPATIBLE WITH SEWER MAIN.
- ③ BEDDING FOR SERVICE AS SPECIFIED FOR SEWER MAIN.
- ④ 10 FT. MIN. DEPTH UNLESS OTHERWISE SPECIFIED ON THE PLANS.

3	10/17/06		TYPICAL SANITARY SEWER SERVICE STUB (DEPTH OF 12' OR LESS)	FIGURE: 4010.1A
REV.	DATE	BY		SHEET 1 OF 1
DATE: 01-01-98				