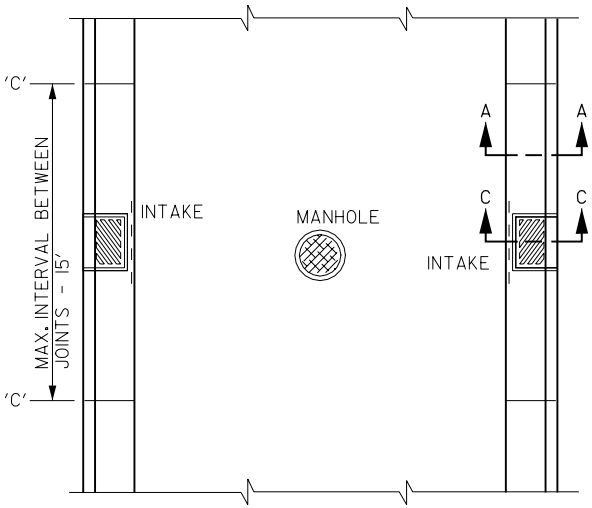

TYPICAL PAVEMENT PLAN

GENERAL NOTES

1. MANHOLES SHALL BE ADJUSTED IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS
2. THE FACE OF GUTTER EDGE SHALL BE CLEANED AND SPRAYED WITH A TACK COAT.
3. WHERE PAVEMENT ABUTS AN UNIMPROVED STREET, IT SHALL BE TERMINATED WITH AN AN ASPHALTIC CONCRETE WEDGE.
4. JOINTS IN P.C.C. CURB & GUTTER SHALL BE 'C' (DUMMY GROOVE JOINT).

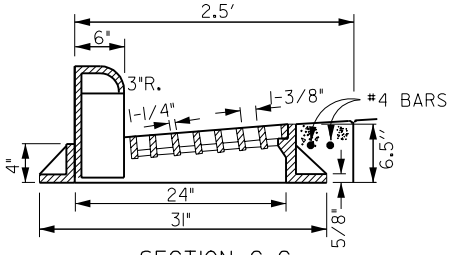

SECTION C-C

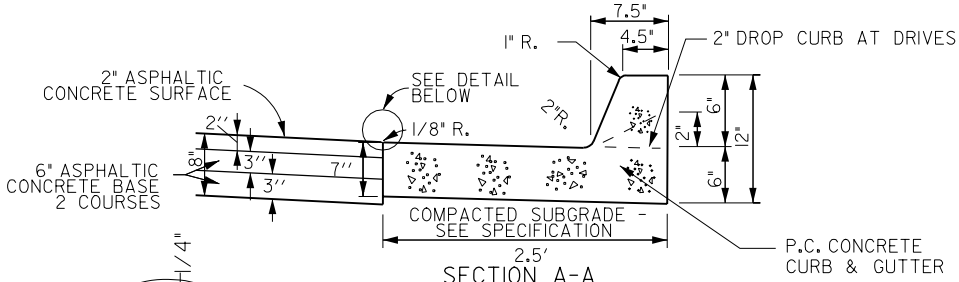

SECTION A-A
STANDARD CURB & GUTTER

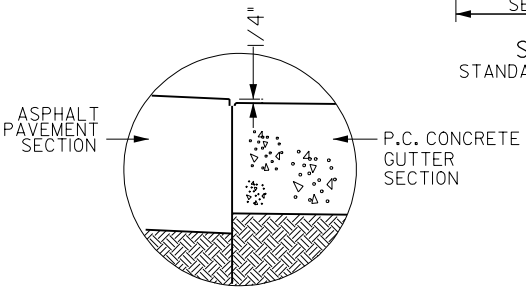

DETAIL



ASPHALTIC CONCRETE WEDGE DETAIL
(SEE NOTE 3)

1	01/25/01		ASPHALTIC CONCRETE PAVEMENT	FIGURE: 7020.3
REV.	DATE	BY		
DATE: 01-01-98				SHEET 1 OF 1