


PERSPECTIVE VIEW
DITCH SLOPE AND BEVELED PIPE

Contract Items:

- Detour Pavement
- Special Backfill
- Embankment In Place
- Excavation, Class 10, Roadway and Borrow
- Excavation, Class 13, Roadway and Borrow
- Removal of Pavement

Tabulation: 112-8

- ① 'L'-2' or 'KT'-2' spaced at one-quarter median width, see Standard Road Plan RH-51.
- ② Match crossover pavement joints with existing roadway joints. 'CD' joints are required. See Standard Road Plan RH-50.
- ③ 'KT'-2' joint, bend bars out for new pavement only.
- ④ Median crossover is symmetrical at centerline.
- ⑤ Beveled pipe and guard. See Detail Sheet 500-12.
- ⑥ 600 mm 'C' Joint.
- ⑦ Slotted drain for median crossover. See Detail Sheet 500-18.

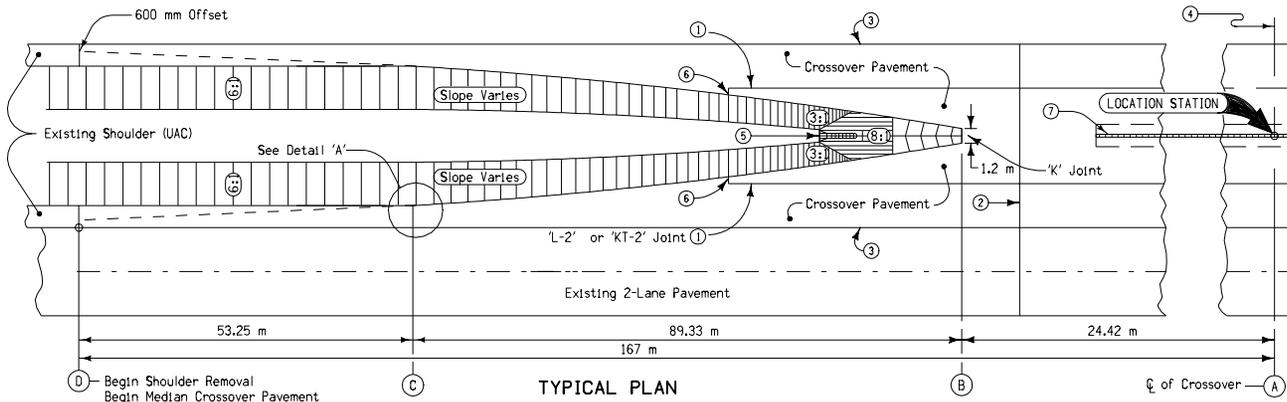

Median Crossover Pavement m ²	Special Backfill MG
3090	1600

All dimensions given in millimeters unless noted.

Distance from Location Station (m)	167	160	150	140	130	120	113.75	110	100	90	80	70	60	50	40	30	24.42	20	10	0
Offset from inside edge of Pavement (m)	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.97	2.50	3.10	3.79	4.56	5.42	6.36	7.38	8.49	9.16	9.76	9.76	9.76
Cross-Slope from Inside edge of Pavement	4.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%
Drop from Inside edge of Pavement (mm)	72	36	36	36	36	36	36	39.4	50	62	75.8	91.2	108.4	127.2	147.6	169.8	183.2	195.2	195.2	195.2
POINT LOCATION	(D)						(C)										(B)			(A)

M METRIC VERSION		
	STANDARD ROAD PLAN RV-13A	
	REVISION: NEW. APPROVED BY DESIGN METHODS ENGINEER	REVISION NO. NEW REVISION DATE 04-19-05
	MEDIAN CROSSOVER (19.51 m MEDIAN)	