ESTABLISHING LOAD TRANSFER IN EXISTING JOINTED CONCRETE PAVEMENTS

by

Wouter Gulden, P. E. Chief, Pavement & Physical Research Branch

and

Danny Brown, P. E. Senior Research Engineer

Georgia Department of Transportation Office of Materials and Research Pavement & Physical Research Branch

Prepared for Presentation at the 1985 Annual Meeting of the Transportation Research Board Washington, D.C.

ABSTRACT

The paper describes the results of a research project with the objective to develop construction procedures for restoring load transfer in existing jointed concrete pavements and to evaluate the effectiveness of the restoration methods. A total of 28 test sections with various load transfer devices were placed. The devices include Split Pipe, Figure Eight, Vee, Double Vee, and dowel bars. Patching materials used on the project included three types of fast-setting grouts, three brands of polymer concrete, and plain portland cement concrete. The number and spacing of the devices and dowel bars were also variables in the project. The dowel bars and Double Vee devices were used on the major portion of the project. Performance evaluations were based upon deflection tests conducted with a 20,000 lb. axle load. Horizontal joint movement measurements and visual observations were also made.

The short-term performance data indicates good results with the dowel bar installations regardless of patching materials. The sections with Split Pipe, Figure Eight, and Vee devices failed in bond during the first winter cycle. The results with the Double Vee sections indicate the importance of the patching material to the success or failure of the Load Transfer Sys .em since some sections are performing well while other sections are performing poorly with Double Vee devices. The horizontal joint movement measurements indicate that neither the dowel bars nor the Double Vee devices are restricting joint movement.

1

I. INTRODUCTION

Many miles of interstate pavement have been constructed using plain jointed concrete pavements of various thicknesses and joint spacings. The presence of a joint is a discontinuity which causes higher stresses and deflections in the pavement especially in the outside corner area. Many designs of jointed concrete pavement relied on aggregate interlock to provide for the transfer of the load across the joint thereby reducing stress concentration and deflections under load. Laboratory studies conducted by the PCA found that the effectiveness of load transfer from aggregate interlock depended upon the load magnitude, number of repetitions, slab thickness, joint opening, subgrade value, and aggregate angularity (1). It was also found that the effectiveness decreased with accumulative load applications.

The variability of the amount of load transfer available from aggregate interlock created by changes in joint openings points out the need to provide for a more positive means of load transfer. In Georgia, and in many other states, dowel bars are placed in newly constructed pavements. Many of the older concrete pavements do not have the dowel bars and this absence of a positive means for load transfer is a contributing factor to the deter vration of these pavement sections. Faulting measurements made in Georgia in 1972 on projects which contained both dowelled and non-dowelled joints indicated that the presence of dowels reduced the rate of faulting (2).

The distress found in plain jointed concrete pavements in Georgia generally has been caused by the presence of an erodible base or subgrade, infiltration of surface water into the pavement system and excessive movement of the slab at the joints. These conditions lead to faulted joints and cracked slabs. A large program to rehabilitate these deteriorated pavements in Georgia has been underway since 1976. These efforts have consisted of reducing slab deflections by filling any voids under the pavement with grout, replacing broken slabs, resealing joints and grinding the surface to restore rideability and skid resistance, or overlay with asphaltic concrete.

The problem of providing a positive load transfer across the joint was not addressed in the rehabilitation efforts mainly because of a lack of a viable cost-effective method of providing load transfer and reducing corner deflection in existing pavements. It is likely that the life of a large percentage of the rehabilitated pavements can be extended if load transfer across the joint could be established by positive means.

Research into this area has been started during the last several years in France and the United States. A report published by FHWA in 1977 contained conceptual proposals for two load transfer devices which could be placed into existing concrete pavement joints (3).

In 1980 the Georgia Department of Transportation received a contract from the Federal Highway Administration to place and evaluate the performance of load transfer devices on in-service concrete pavements. The objective of the research project was to develop construction procedu. as for restoring load transfer in existing concrete pavements and to evaluate the effectiveness of the restoration methods.

The objectives of the study was to be accomplished through installation of various load transfer devices and monitoring the performance of these devices under actual interstate traffic conditions.

II. DESIGN AND PERFORMANCE OF TEST SITE

The location which was selected for the test site was on I-75 in the southbound lane approximately 40 miles south of Atlanta. The average daily

traffic (ADT) on the test area is 15,000 vpd to 17,000 vpd with 19 percent heavy trucks.

The pavement in the test area is a 9 inch plain jointed concrete pavement with 30 ft. joint spacing. The base course is a 3 inch bituminous stabilized soil aggregate on top of a 5 inch layer of granular subbase. The shoulder consist of a 6 inch cement stabilized graded aggregate with a 1 1/2 inch asphaltic concrete topping. The pavement was opened to traffic about 1967.

This section was rehabilitated in 1976 by DOT maintenance forces because of the severe magnitude of faulting and pumping that was taking place. The rehabilitation consisted of undersealing, spall repair, replacement of broken slabs, addition of edge drains, sealing of transverse joints, and grinding. Annual surveys conducted on this section have shown a significant increase in the faulting level in some areas since rehabilitation. There also has been an increase in the number of broken slabs and replaced slabs and visual signs of slab movement in the general area since the rehabilitation was completed in 1976.

III. EXPERIMENTAL LAYOUT

The test sections were designed to look at variables such as patching materials, types of load transfer devices, and number of devices or dowel bars per joint. The patching materials used in the sections were polymer concrete, rapid set materials, and high early strength portland cement concrete. The load transfer devices consisted of Split Pipe, Figure Eight, Vee, and Dowel Bars. The interaction of these variables as used in the research project are contained in Table 1. In addition, ten control sections ranging

from 3 joints to 17 joints in size were placed throughout the project. The deflection data obtained on the control joints were used as a guide to determine whether or not the load transfer devices were effectively minimizing the differential deflection across a joint and reducing the total deflections of a slab.

IV. PATCHING MATERIALS AND LOAD TRANSFER DEVICES

A combination of five types of load transfer devices and seven patching materials were used in the test installations. All but two of the seven patching materials were used in short sections specifically placed to evaluate those materials.

The success or failure of a load transfer system depends upon the performance of both the load transfer device and the patching materials. The following factors must be met for a load transfer system to provide long-term performance:

- The patching material and device must have sufficient strength to carry the required load.
- (2) Sufficient bond must be achieved between the device and the patching material to carry the required load.
- (3) Sufficient bond must be achieved between the patching material and the existing concrete to carry the required load.
- (4) The device must be able to accommodate movement due to thermal movement of the concrete slabs.
- (5) The bond between the device and the patching material must be sufficient to withstand the forces due to thermal movement of the concrete slabs.

- (6) The patching materials must have little or no shrinkage during curing. Shrinkage of the patching material can cause weakening or failure of the bond with the existing concrete.
- (7) The patching material must develop strength rapidly so that traffic can be allowed on the slabs in a reasonable length of time (3 to 4 hours).

Patching Materials

The patching materials used to secure the load transfer devices consisted of three types of materials: special quick-setting materials, polymer concretes, and high early strength portland cement concrete. The special quick-setting materials consisted of two brands of magnesium phosphate based materials (Set 45 and Horn 240) and one fiber glass reinforced portland cement based material (Road Patch). The polymer concretes consisted of three brands of methyl methacrylate based material (Concresive, Silikal, and Crylcon). The portland cement concrete used Type III cement, colcium-chloride, and aluminum powder to improve setting times and reduce shrinkage.

A thorough laboratory evaluation or trial installation should be "ade of any patching material that is to be used in a load transfer system. Working time, bond strength, rapid early strength gain and shrinkage are prime factors which must be evaluated prior to choosing a patching material.

Load Transfer Devices

<u>Georgia Split Pipe Device</u> - This device was developed by the Georgia DOT Office of Materials and Research personnel and is shown in Figure 1. To install these devices the two sides of the "split pipe" are epoxied to either

side of the 4 inch diameter core hole and the epoxy allowed to set. The top and bottom plates rest on the top and bottom edges of the two split pipe pieces. The four bolts are tightened and the load transfer between the slabs is carried by the four bolts and the epoxy bond between the split pipe pieces and the concrete core hole surfaces. Thermal expansion movement is accommodated by the slippage of the top and bottom plates on the end of the split pipe pieces.

Figure Eight Device - This device is a single piece cylindrical metal shell formed in the shape of the numeral eight as shown in Figure 2. The device is installed in a 4 inch diameter core hole and epoxy is used to bond the device to the walls of the core hole. The center of the device and the indentations on the side are filled with foam to keep out debris. The device has previously been used experimentally in France (4).

<u>Vee Load Transfer Device</u> - This type load transfer device was first proposed in a report published by FHWA in 1977 (3) along with the "Figure Eight" device. The device consists of a 1/4 inch thick steel plate bent into the shape of a V as shown in Figure 3. The device is not commercially available and was specially fabricated for this research project.

In order to be able to install the Vee device, two 6 inch diameter core holes have to be drilled which are filled with a patching material after the installation. The V portion was filled with a urethane foam and a thin layer of polyethelyne foam was placed around the outside of the V to allow for expansion and contraction of the slab. An additional piece of foam was used to reestablish the joint.

<u>Double Vee Load Transfer Device</u> - This device essentially is two Vee devices placed back-to-back and down-sized to accommodate installation in a

6 inch core hole. The device was designed and initially tested at the University of Illinois (5) and is now commerically available under the trade name of LTD Plus. Some minor additional design changes to the device shown in Figure 4 have taken place since its use in this research project. The center section of the device is filled with foam to keep out debris and a thin foam pad is placed around the outside of the V portion to allow for expansion and contraction movement. The devices used in this project are epoxy coated to prevent rusting and current devices are manufactured from stainless steel.

<u>Dowel Bars</u> - Dowel bars are the most widely used load transfer device in new construction and these commonly used dowel bars were also used on this research project. The dowel bars were plastic coated steel bars 18 inches in length and 1 1/4 inch in diameter. The dowel bars were placed on chairs in the slots. Foam material was used to reestablish the joint over the bar when the patching material was placed.

V. CONSTRUCTION OF TEST SECTIONS

The first twenty-two test sections were constructed during the summer of 1981 and the remaining sections were placed during 1982. The 1982 test installation procedures were based on the most promising results from the 1981 installation.

The construction consisted of coring holes for all the devices or cutting slots for placement of the dowels. Four inch diameter holes were cut for the Split Pipe device and Figure Eight Devices. Six inch diameter holes were cut for the Double Vee devices, and two overlapping six inch holes were cut for the Vee device. The slots were cut using a single bladed saw making four passes approximately one inch apart.

Load Transfer Devices

The placement of the devices and patching materials were done in accordance with the manufacturer's recommended procedures regarding cleaning the concrete, mixing time, use of primers, etc. The joint over each device was reestablished by using a 1/2 inch thick closed cell foam material during placement of the patching material.

Problems were encountered in 1981 with the placement of some of the polymer concrete. Some chemical components of the polymer concrete are sensitive to heat and had deteriorated. This chemical deterioration caused this polymer concrete to stay uncured. The low viscosity of the liquid component of the polymer concrete also posed a problem. This liquid component drained out of the polymer mix under the slab. This left a weak material near the top of the core hole. This problem became apparent after the 1981 installations when the material above the load transfer devices showed signs of ravelling under traffic. This problem with the polymer concrete liquid component repeated itself in the Silikal test section in 1982. The liquid component "ran out" of the solid components, to some degree reducing the effectiveness of the material.

When the Crylcon test section was placed, precautions were taken to avoid the "run out" problem. Plaster was mixed and placed in the bottom of holes to seal any cracks and loose base material. When the Crylcon polymer concrete was placed in the holes "run out" did not occur and all material placed cured properly.

Dowel Bars

It was initially believed that a carbide-tipped cutting tool could be used successfully to cut slots for dowel bars in concrete at a reasonable rate of production.

A special mandrel was built by the CMI Corporation for a Rotomill PR-275-RT which was owned by the Georgia Department of Transportation. The mandrel contained four rows of cutting teeth designed to cut slots 5 1/2 inches deep, 4 1/2 inches wide, and 15 inches apart center to center.

Prior to placing the Rotomill on the Interstate test sections, a trial installation was attempted on US 41 near Macon, Georgia in May 1981. One pass of four slots each was made in three joints before the trial was halted. Several problems were immediately apparent.

a. The maximum depth of the slots that could be cut was 3 1/2 inches to 4 inches due to physical restraints of the Rotomill.

b. Excessive spalling occurred at the edges of the slots and at the joints themselves which would make patching of the slots difficult.

c. The machine endured excessive vibration during the cutting process which could have damaged the equipment if cutting was done on a long-t rm basis. The excessive vibration could possibly have been overcome by the use of a larger and heavier machine. The weight of the PR-275 was approximately 37,500 lbs.

d. An excessive amount of water and debris was left on the pavement. Cutting the slots with the Rotomill would make it necessary to place the dowels and patch the slots prior to opening the road to traffic because of the width of the slots. The threat of inclement weather would also hamper construction since one would have to be sure that the slots could be patched prior to beginning work.

Considering these factors, it was concluded that cutting slots using carbide-tipped cutting equipment was not feasible.

The slots were cut in the concrete pavement on the actual test sections on I-75 using 30 inch diameter diamond blade saws. The slots were cut 5 1/2 inches deep, approximately 3 1/2 inches wide, and were centered across the joints at the spacings indicated in Table 1. The length of the slots were such that the bottom of the slots were 20-24 inches long.

The slots were generally cut with a single blade saw. Four cuts were made per slot, leaving 3 "fins." After sawing, the slots are left open to traffic, with the fins in place, for several days while other slots are being sawed. These "fins" had a life expectancy of one week or less before they begin to break out and the open slot became a hazard to traffic.

Both the sawing of the slots and the manual removal of the fins was a time consuming process since no equipment was available to do this operation on a production basis.

VI. DATA COLLECTION PROCEDURES

The performance of the test sections have been monitored through deflection measurements and visual observations. Deflection measurements were made using a weight truck with a 20 kip load on a dual tired single rear axle.

The procedure for measuring the slab movement was to position dial gauges on both corners at the joint and zero the gauges. The dial gauges were mounted on a frame which sat on the shoulder. A loaded truck was then slowly moved forward onto the slab until the rear wheels were positioned within 3 inches of the transverse joint and close to the shoulder joint.

The deflection on the loaded side of the joint and the unloaded side were then recorded. The truck then moved ahead slightly to position the rear wheels just past the joint and the deflection at both corners was once again recorded.

Horiztonal joint movement was measured at 100 joints in the test area to determine if any of the load transfer devices were restraining contraction and expansion movements. This horizontal movement was measured using pins set in the concrete across the joints.

Close-up visual examination were made of each load transfer installation during each evaluation period to determine bond failures and spalling, cracking, or subsidence of the patching material. The condition of the concrete pavement slabs in the entire experimental area was also noted on strip charts during each performance evaluation.

VII. PERFORMANCE

Load Transfer Capabilities

The main criteria for evaluating the performance of the load transfer devices is of course their effectiveness in lessening the effects of the discontinuity in concrete pavement that is caused by the presence of a joint. A standard method for determining this effectiveness is to compare the deflections of the loaded side of a joint to the deflection of the unloaded side of the joint under a static or dynamic load.

The amount of load transfer can be calculated by a method first used by Teller and Sutherland (6).

$$LT\% = \frac{2 Du}{D1 + Du} \times 100$$
(1)

where

LT = Load transfer in percent Du = Deflection of unloaded slab Dl = Deflection of loaded slab

Joint efficiency is also used to describe the amount of discontinuity caused by a joint and is defined as follows:

$$JE\% = \frac{Du}{D1} \times 100$$
 (2)

Jointed concrete pavements in the field are constantly in vertical motion caused by changing temperature gradients in the concrete slab throughout a day. Slab corners are curled upwards during morning hours and therefore lose contact with the subbase with the reverse being the case in the afternoon hours. The amount of load transfer that is in existence can change drastically throughout the day so that deflection measurements must be made several times during the day to determine load transfer values. If only one set of readings is to be obtained, the testing should be confined to the early morning hours when the highest deflect..ns are likely to be encountered. Comparisons between test installations are only valid when the measurements were made atthe time of maximum deflections and not when the slabs are curled down and in maximum contact with the subbase. This fact is especially true for pavements which have been under traffic for some time and have developed small voids under the slab corners.

The location of the load at the joint for which the load transfer is to be determined is of importance since the slab at the approach side of the joint usually does not contain as large a void as could be the case

under the leave side of the joint. Generally the deflections measured on the approach side of the joint are less than the deflections obtained on the leave side.

The manner in which the load transfer and joint efficiency ratio's are calculated cause the results to be highly dependent on the magnitude of the deflections as shown in the hypothetical example below.

Test No.	Deflectic Loaded Side	on (mills) Unloaded Side	Joint Efficiency	Load Transfer
1	6	1	17%	29%
2	10	5	50%	87%
3	35	30	86%	92%

The difference in deflections for all three joints in the preceding example is 5 mills yet the joint efficiency or load transfer becomes increasingly better with the higher deflection levels.

From a performance standpoint, test location no. 1 in the above example would be more desirable since it has low deflection levels yet it fails to provide effective load transfer by the definitions given in equations (1) and (2). The equations are meaningless for low deflection levels and a different approach must be used in analyzing the effectiveness of the various load transfer devices that were installed as part of this research project.

Since joint efficiency and load transfer percentage was not considered to be the best approach for analysis, another method was used. The deflection data obtained for this research project was analyzed in terms of maximum deflections and in terms of differential deflection between loaded and unloaded slab corners.

Deflections were obtained during three evaluation periods, January 1982, September 1982, and March 1983. Three sets of tests were made each time; one series was made early in the morning generally starting at 7:00 am, a second series of tests was run mid morning starting at 10:00 am, and a third set was made in early afternoon starting at 1:00 pm. The series of tests were made in the manner to be able to detect the changing deflection and load transfer conditions of the joints as they were affected by temperature changes and time of day.

The effects of seasonal changes on the load transfer conditions was evident from the three series of tests which were conducted at different times of the year and clearly showed that the higher deflections were obtained in September 1982 and always occurred in the early morning test series for all three evaluation periods. The deflections obtained with the load on the leave side of the joint also were generally larger than the deflection obtained on the approach side when loaded. The deflection data also shows that the vertical movement measured in the early afternoon is generally negligible regardless of the magnitude of the movement measured in the early morning (Figure 5). Performance comparisons between the various load transfer systems were therefore based on deflections measured during the early morning hours when significant slab movements are likely to take place.

A low differential deflection value could indicate one of two conditions:

 The loaded slab is in contact with the base and has a low total deflection value and transfer of load by means of a device is not necessary.

2. The load is being transferred across the joint to a large extent even though the maximum deflection of the slab may be large.

The field data also showed that when there is a significant amount of interlock between adjoining slabs through mechanical or other means, the differential deflections are small and do not change much throughout the day regardless of the magnitude of the actual deflection.

The critical time period for analysis is the deflections obtained during the early morning testing with the load placed on the leave side of the joint. The average differential deflection values for each test section is shown in Figure 6 for the March 1983 test period with the load placed on the leave slab. The bar charts in Figure 6 clearly show that all the sections with the dowel bars were performing well along with ten of the fourteen sections containing Double Vee devices. Section four containing the Vee device shows good performance on the bar chart, however, the data is suspect for this section for March 1983 since the deflection difference obtained in September 1982 was 35 mills. The March 1983 readings were generally much less than those obtained in September 1982 for sections showing poor performance. For the sections with good performance there generally was not much difference between the September 1982 and March 1983 differential deflection values. This fact is an indication of the seasonal influence on sections with little or no mechanical interlock. When adequate mechanical interlock is present, the seasonal influences are minimized in a manner similar to that noted previously for the daily temperature cycle changes.

The discussion so far has been confined to average deflection values for each test section. An average value, however, can be artificially inflated by a few poor performing joints within a test sections when only a small number of joints make up the section. The percentage of the joints

with a differential deflection value of 10 mills or less for each test section is shown in Table 2 for the case with the load on the leave slab and early morning test results. The values shown for September 1982 for sections 23 and higher, excluding control sections, represent initial values since they were obtained soon after construction.

The sections containing dowel bars are all performing well as compared to the control sections regardless of the number of dowels per joint. Little difference can be noted between the sections with the Split Pipe, Figure Eight, and Vee device and the control sections which are all performing poorly.

The performance of the sections with the Double Vee devices vary with half the sections showing good performance and half of the sections showing marginal to poor performance.

Horizontal Joint Movement Restrictions

Horizontal joint movement measurements were made to determine if any of the load transfer devices would prevent the joint from functioning in a normal manner with respect to daily and seasonal temperature changes. Joint movement data is similar to deflection data in its behavior in that it can vary from joint to joint and from day to day for a joint over the same temperature range.

The resistance to opening or closing of a joint by the various load transfer devices is of concern since slab cracking can occur if the expansion and contraction movements cannot be accommodated at the joints. It is also important in that excessive stress can cause a bond failure of the patching material thereby rendering the load transfer device useless.

The general indication from the joint movement data is that the Double Vee devices and the dowel bars do not excessively restrict the horizontal joint movement. Bond failure had already taken place for the Split Pipe, Figure Eight, and Vee devices when the first test were made in January 1982. The bond failure could have been caused by excessive restraint of the joint movement, failure of the patching materials, installation problems, or other causes.

No detailed analysis on the horizontal movement trends and variations will be made in this paper since the only intention for obtianing the data was to determine excessive restraint of the horizontal joint movement imparted by the load transfer devices.

Visual Observations of Load Transfer Device Installations

Each of the load transfer installations was visually evaluated during each testing period. The items of concern are visible separations between the patching material and the devices or the pavement, loss of patching material, and cracking of the patching material.

Visual observations of the test sections have shown problems with disbonding between the patching material and the pavement on many of th. Double Vee installations and on some of the dowel bar slots. The Double Vee installations with Horn 240 patching material contains cracking located over the fins of the device. Some transverse cracking at the end of the bars has been noted in the dowel installation with plain portland cement concrete as the patching material. The best performing materials to-date with the Double Vee are two polymers and plain portland cement concrete.

Reduction in Deflection Levels

One of the objectives of the research project was to determine if corner deflections of the concrete slabs would be reduced by placing load transfer devices in the joint.

A determination of the amount of reduction that can be expected when load transfer systems are installed was a difficult proposition since the magnitude of a joint deflection changes from day to day and from location to location even within short distances.

An estimate was made by comparing the deflection levels of "failing" joints to "good" joints within a section and by comparing the average deflection levels of good performing joints to control sections in the immediate vicinity. For comparison purposes a joint was considered to have failed to provide adequate load transfer when the differential deflection was more than 10 mills. The analysis was based on deflections obtained during the early morning testing conducted in March 1983 and only those joints where the load transfer systems are performing well were included in the analysis.

The short-term performance data indicates that a definite reduction in deflection levels can be obtained using mechanical load transfer. A reduction ranging from 50% to 75% was obtained in the dowel sections with similar reductions measured in the Double Vee sections which were still performing well. It is advisable to stabilize excessively moving slabs through undersealing prior to installing load transfer devices or dowel bars in order to enhance the long-term performance of the joint. In Georgia a deflection value of more than 0.030 inches is considered excessive based upon past experience with undersealing of concrete pavements.

Overall Performance

A rating of the performance of the various installation is contained in Table 3. These ratings are based upon the authors interpretation of the percentage of joints having differential deflection values of 10 mills or less, the average differential deflection values, and the visual appearance of the installation obtained during the last comprehensive evaluation conducted in March 1983. The Split Pipe, Figure Eight, and Vee devices all failed within the first winter and their performance rating is not included in Table 3.

A visual condition survey conducted in June 1984 indicated additional bond failures in the various test sections. The visual ratings indicate overall performance of the test sections and does not mean that each individual joint has failed in a "Marginal" or "Poor" performing section.

The ratings do indicate that the dowel sections are generally performing better than the sections with other load transfer devices. All the ratings are based on only three years of traffic and long-term performance of any of the installations now rated as "Good" is still in question.

CONCLUSIONS

1. The success or failure of a load transfer system depends on both the device and the patching material. The patching material must develop sufficient strength and bond to allow the device to open and close and to withstand the vertical stresses imparted by the loads. The load transfer device must be able to accommodate the horizontal joint movements without disbonding the patching material.

- 2. Commonly used formulas for calculation load transfer and joint efficiency are inadequate for conveying the true effect of a load transfer system. These formulas cause the load transfer value to be highly dependent upon the magnitude of the deflection levels. The difference in deflection between the loaded and unloaded slab is a better indicator of the performance of the joint.
- 3. Analysis of the effectiveness of any load transfer at a joint should only be based upon the deflections levels that are present during the early morning hours when significant slab movements are likely to take place.
- 4. The sections with the Split Pipe device, Vee device, and Figure Eight device and some of the sections with the Double Vee have failed to provide adequate load transfer by the criteria used in this study.
- 5. The sections with the dowel bars regardless of the number of bars per joint are performing better than the other sections after two and three years of traffic although some failures are occurring. Horizontal joint movement measurements indicate that the dowel bars and the Double Vee devices do not excessively restrict the horizontal joint movement. Bond failures had already taken place for the Split Pipe, Figure Eight, and Vee devices when the first horizontal movement measurements were made during the first winter cycle.
- 6. The short-term performance data indicates that a definite reduction in deflection levels can be obtained using dowel bars or Double Vee devices. The amount of reduction on the research sections ranged from 50 percent to 75 percent when the deflection levels of the good performing test sections were compared to control sections in the immediate vicinity. This data is based on short-term performance only.

RECOMMENDATIONS

- The type of patching material to be used with a load transfer device must be given careful consideration and laboratory test should be conducted on new materials to determine ultimate bond strength, rate of strength gain, working time, and other factors prior to using any material on a construction project.
- 2. It is recommended that the core hole walls or slot walls be grooved or a rough wall be provided in load transfer installations to reduce the dependency on the bond between the patching material and the existing concrete to carry the load.
- 3. The core hole or slot must be thoroughly sealed on the bottom and along the side when polymer concrete is used as the patching material to prevent drainage of liquid component in the polymer concrete mix.
- 4. Retrofitted load transfer installations should not be installed to reduce excessive deflections in slabs but rather should be placed to prevent high deflections from reoccurring once slabs have been stabilized.

It is desirable that vertical slab movement in excess of 0.030 inches measured during early morning hours be reduced through undersealing prior to the installation of any load transfer devices.

5. It is recommended that for dowel installations three dowels be placed in the outside wheelpath and two dowels be placed in the inside wheelpath. Once long-term performance data has been obtained it may be possible to eliminate the load transfer devices in the inside wheelpath. Four Double Vee devices per joint should be used on future installations. 6. Any future installations should be placed on an experimental basis until long-term performance data can be obtained on the current test sections. New installations are encouraged to provide additional performance data under a variety of traffic, weather, and design conditions.

ACKNOWLEDGEMENTS

The data and information presented in this paper are the result of a research study funded by the Federal Highway Administration.

The contents of this report reflect the views of the authors who are responsible for the facts and accuracy of the information and data presented herein. The contents do not necessarily reflect the official views or policies of the Federal Highway Administration or the Georgia Department of Transportation.

This report does not constitute a standard, specification, or regulation.

Trademarks or manufacturer's names appear in this report only because they are considered essential to the object of this document and do not constitute endorsement of a product by the Federal Highway Administration or the Georgia Department of Transportation.

REFERENCES

- 1 Colley, B. E. and Humphrey, H. A., "Aggregate Interlock at Joints in Concrete Pavements" Highway Research, Record No. 189, p. 1-18 (1967).
- 2 Gulden, W., "Pavement Faulting Study" Georgia Department of Transportation, Research Project 7104 Final Report 1975.
- 3 Ledbetter, W. B. et al, "Techniques for Rehabilitating Pavements Without Overlays - A System Analysis, Vol. 1" Federal Highway Administration, FHWA-RD-78-108, September 1977.
- 4 Verhee, F., "Structural Maintenance of Cement Concrete Pavements, Assessment of Present Ideas - Results of French Experiments" Proceedings 2nd International Conference on Concrete Pavement Design, Purdue University 1981.
- 5 Korbus, L. and Barenberg, E. J., "Longitudinal Joint Systems in Slip-Formed Rigid Pavements; Vol. IV" Federal Aviation Administration, FAA-RD-79-4, IV Interim Report.
- 6 Teller, L. W. and Sutherland, E. J., "A Study of Structural Action of Several Types of Transverse and Longitudinal Joint Design" Public Roads, Vol. 17, No. 7, September 1936.

Dowel Bars Double Vee 66G Figure Eight Split Pipe TYPE DEVICE Portland Cement Concrete Polymer Concrete Set-45, Roadpatch, Horn 240 Set-45, Roadpatch, Horn 240 Polymer Concrete Bonded with Epoxy Portland Cement Concrete Polymer Concrete Bonded with Epony PATCHING MATERIAL 4 every other joint DEVICES PER JOINT 3 20 N ω æ Q1 ça 3 œ N لم *6*24 ω *8*6 \$ ь æ NUMBER OF JOINTS 35 10 10 30 44 88 30 39 20 20 10 10 20 ŝ 20 c) ςn w) ŝ TEST SECTION NUMBER 20, 27, 29 17, 18, 19 ça ġ, 11, 14 2 and , 9, 10 1 ŝ 25 30, 36 **دی** 46 12 23 22 \$ ŝ ŝ -----~~ <u>ب</u>ب د OUTSIDE PAVEMENT EDGE 915115 1'0 2'0 Ţ.' '' 1020 1.0 2.0 **T**---|-| <u>-</u>| <u>-</u> | <u>-</u> S" 1'0 z'0 10 3' 121 181 181 12, 16, 18, 18, 18, 18, 19915" 15" 15" 15" 15" 15" 15" 15" 1020 1020 1'0 ''0 SPACING OF DEVICES ф φ ģ ¢ v, \$.5 4.5 4.5 ÷. 5 ų ug сų w_ ພູ w ф φ ¢ 0 2 0 þ 0 1.0 ф φ Ŋ 넻 ي ų |<u>~</u> ф ф φ

TABLE Í LOAD TRANSFER TEST SECTION VARIABLES PERCENT OF JOINTS WITH DIFFERENTIAL DEFLECTIONS OF 10 MILLS OR LESS LOAD ON LEAVE SLAB TABLE 2

.3

	<u>D1-Du</u> 82 War R3	-1	33	20	17	33	0	80	10	38	80					
CONTROL	Cant 82		33	0	17	0	0	06	0	0	20	a second and a second and a second as a				
	Test Section	101-3-200	10A	ç	18A	21	24	26	28	32	35					q
-)U Mar 83	.(50	42	50	100									oaded Slab	nloaded Sla
MISCELLANEOUS	Cant 82 M		0	17	0	20									Deflection of Loaded Slab	Deflection of Unloaded Slab
IW	Test Section	36461011		2	ę	4									D1 = Defle	Du = Defle
	1-Du	CO . 194	100	06	06	06	100	100	100	100	100	06				
DOMEL BARS	ρ¢ Ι	sept. oc	06	60	80	100	80	100	00 L	80	06	100				
		Section !!	œ	6	10	=	12	14	15	16	33	34	and the second se			
Control of the second sec	Du ura or	Mar. 03	95	65	30	20	40	100	06	76	75	98	93	16	06	06
DOUBLE VEE	D1-Du	Sept. 02	85	70	20	70	50	06	06	11	3 5	98	36	100	06	06
	Test	Section	ະດ	9	7	17	18	61	20	22	23	25	27	29	30	31

										, Portland Cement	Silikal	Crylcon					Concres ive		Horn 240		Road Patch		Set 45	Patching Material
	·				nowels					Double Vee	Double Vee	Double Vee	Dowe 1 s				Double Vee	Dowels	Double Vee	Dowels	Double Vee	Dowels	Double Vee	Type Load Transfer
34	33	16	15	14	11	29	27	25	23	20	31	30	12	22	7	6	сл	10	19	Q	18	8	17	Test Section No.
۱Ŀ	10	UT	ភ	10	10	34	55	45	44	10	10	10	10	17	20	20	20	10	10	10	10	10	10	Number Joints
ូហា	ω	4	IJ	8	8	. 478 0	Ą	ω	2	4	4	\$	8	43	2	ω	4	8	ф	8	Ą	8	æ	Devices Per Joint
Good	Good	Good	Good	Good	Good	Good	Good	Good	Marginal	Good	Good	Good	Good	Marginal	Poor	Marginal	Good	Good	Good	Good	Poor	Good	Marginal	March 83 Performance Rating
Good	Marginal	Good	Good	Good	Marginal	Marginal	Marginal	Marginal	Marginal	Good	Marginal	Good	Good	Poor	Poor	Poor	Poor	Marginal	Poor	Good	Poor	Good	Marginal	June 84 Visual Rating

TABLE 3 PERFORMANCE RATINGS OF TEST SECTIONS

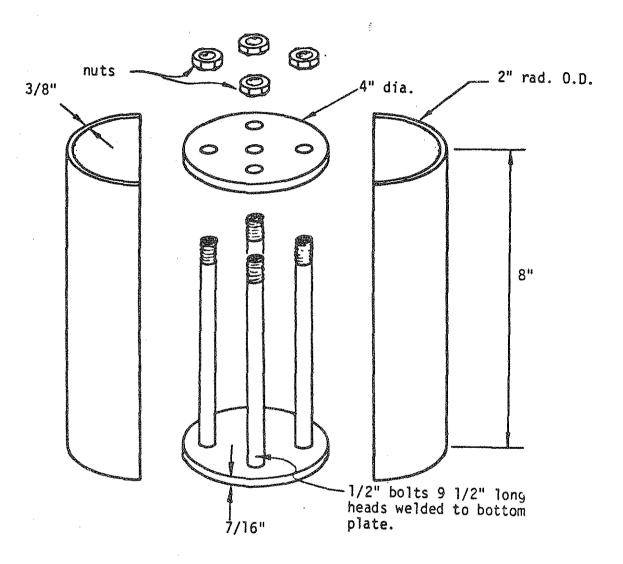
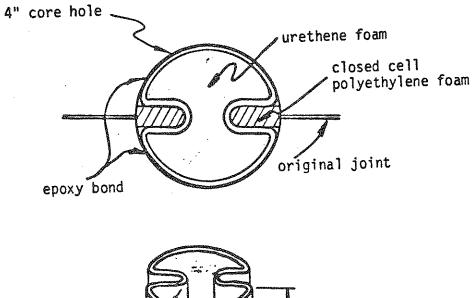
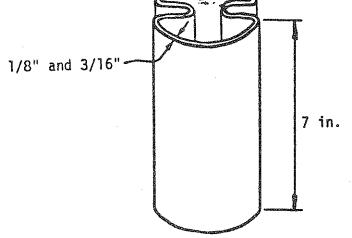



Figure 1 Georgia Split Pipe Device







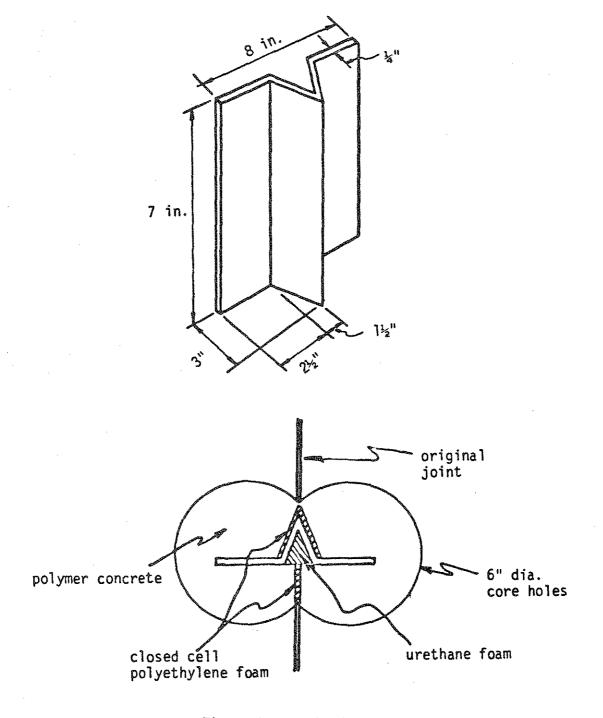
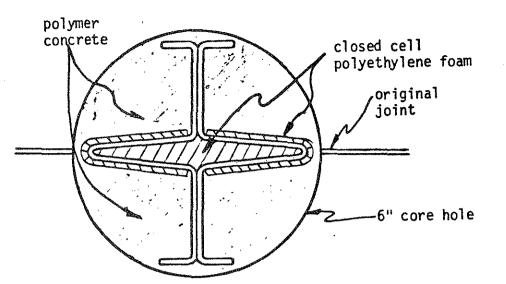
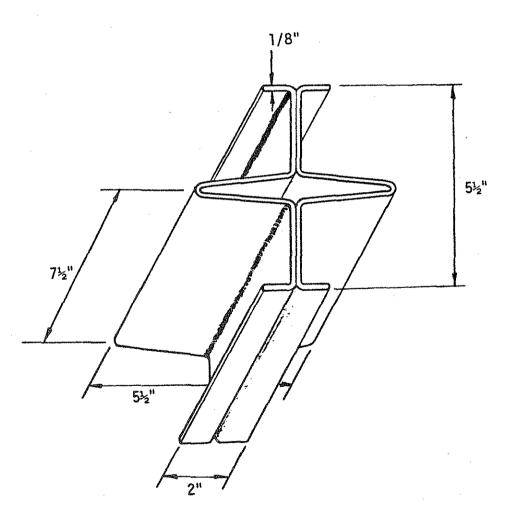

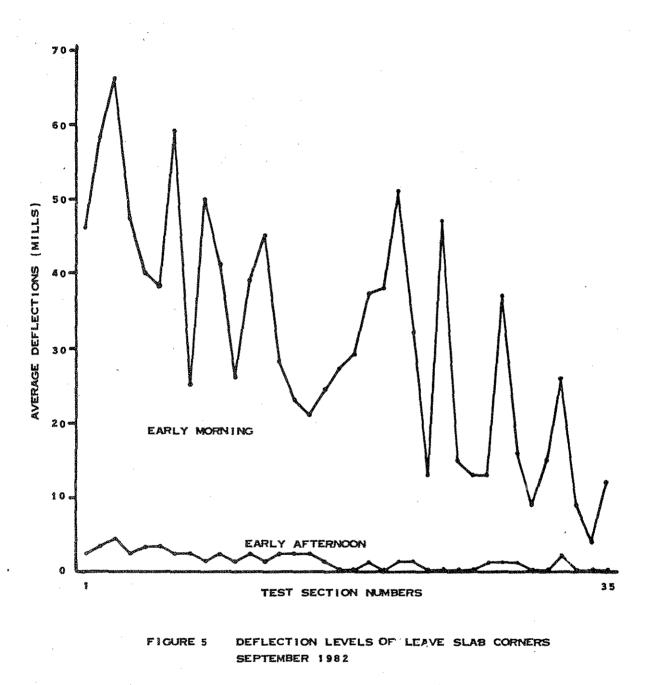


Figure 3 Vee Device









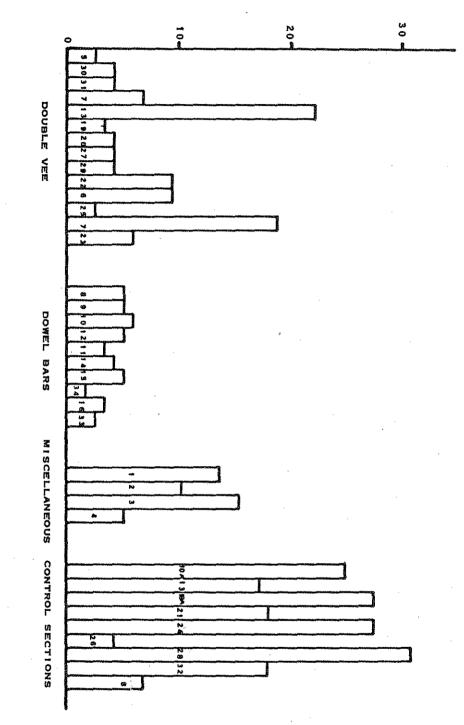


FIGURE 6 DIFFERENTIAL DEFLECTION VALUES - MARCH 1983 EARLY MORNING LOAD ON LEAVE SLAB DIFFERENTIAL DEFLECTION