




URBAN STANDARD SPECIFICATIONS for PUBLIC IMPROVEMENT MANUAL

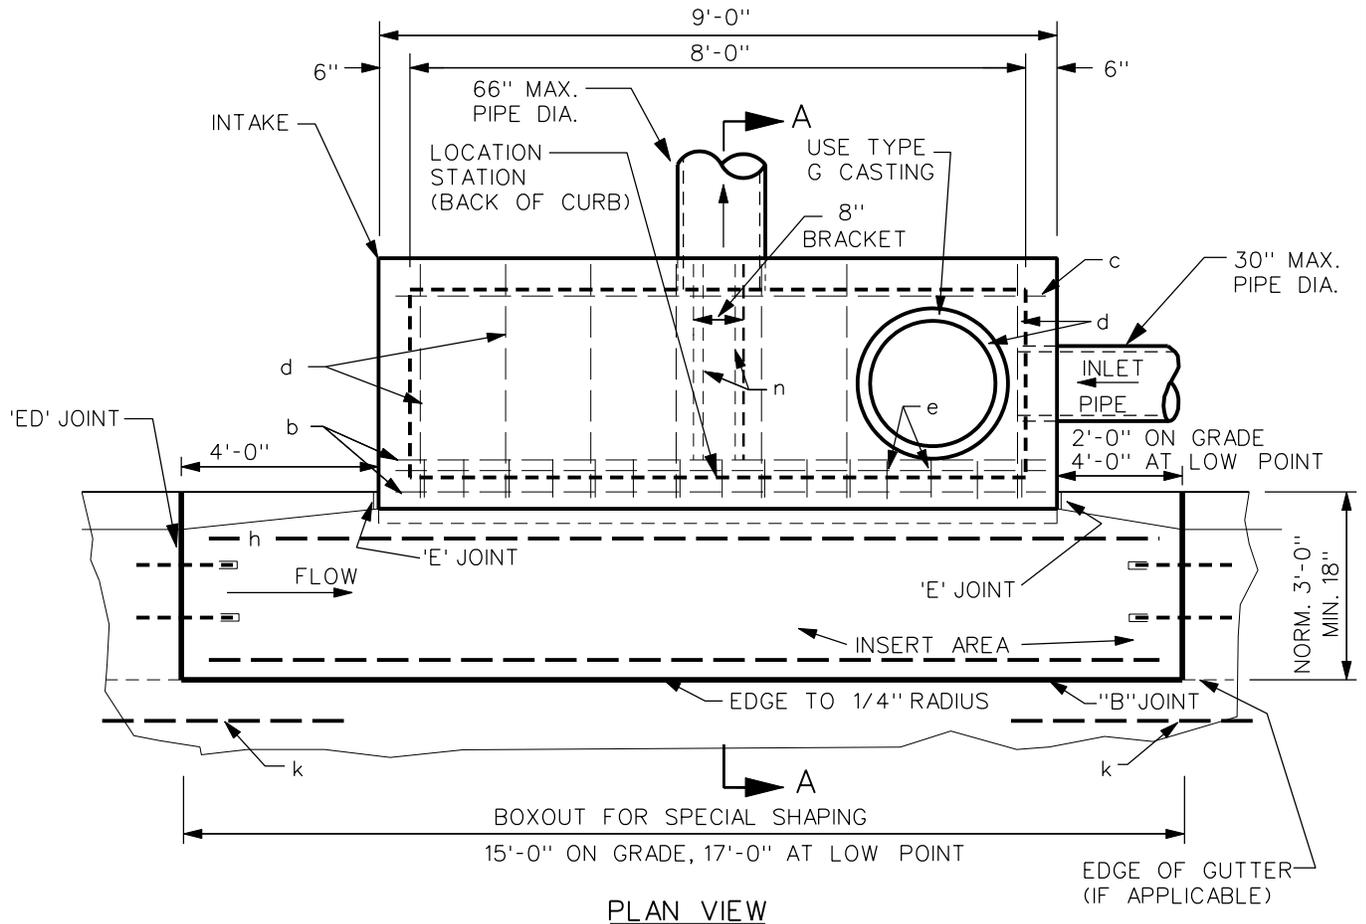

PLAN VIEW



KEYED CONST. JOINT



BENT BAR DETAIL

PIPE SIZE:

MAXIMUM ALLOWABLE PIPE DIAMETERS SHOWN ARE FOR CAST-IN-PLACE STRUCTURES. FOR PRECAST STRUCTURES, THE MAXIMUM ALLOWABLE DIAMETER SHALL BE ONE (1) STANDARD PIPE SIZE SMALLER THAN THOSE SHOWN. ACTUAL PIPE SIZE SHALL BE AS SHOWN THE PLANS

NOTE:

WHEN MINIMUM DEPTH INTAKE IS CONSTRUCTED, IT IS INTENDED THAT THE CONCRETE FILLET BE INSTALLED AS INDICATED, FROM THE BASE TO THE ELEVATION OF PIPE FLOW LINES.

FOR ADDITIONAL DETAILS SEE SHEETS 2 & 3.

3	10/18/05		"DOUBLE OPEN THROAT" TYPE M-I INTAKE	FIGURE: 6030.10
REV.	DATE	BY		SHEET 1 OF 3
DATE: 01-01-98				



