



PRE-MANUFACTURED DETECTABLE WARNING PANEL INSTALLATION

PRE-MANUFACTURED DETECTABLE WARNING PANELS SHALL BE FIRMLY SUPPORTED AT ALL CORNERS ON RE-ROD OR CHAIR SUPPORTS AND PLACED INTO PLASTIC CONCRETE SIDEWALK RAMP.

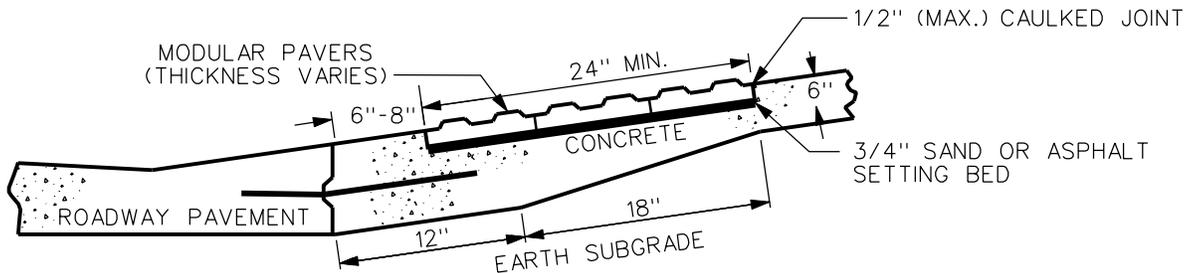

MODULAR DETECTABLE WARNING PAVED (BRICK PAVER) INSTALLATION

INSTALL MODULAR PAVERS AS SPECIFIED IN SECTION 7030, 3.14

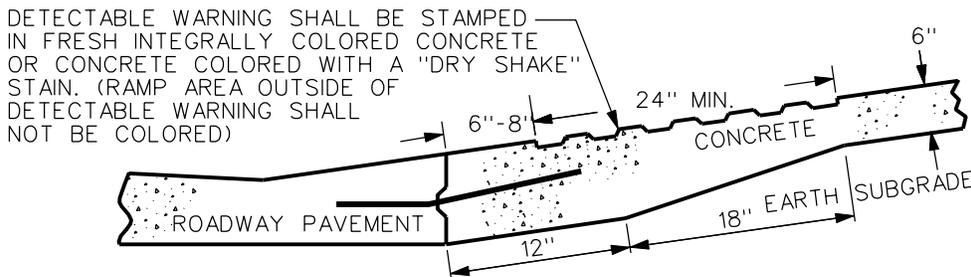

STAMPED DETECTABLE WARNING INSTALLATION

NOTES:

A 24" STRIP OF DETECTABLE WARNINGS SHALL BE INSTALLED AT THE BOTTOM OF RAMP, 6"-8" BEHIND THE BACK OF CURB. DETECTABLE WARNING SURFACES SHALL CONTRAST VISUALLY WITH ADJACENT WALKING SURFACES EITHER LIGHT ON DARK OR DARK ON LIGHT

REV.	DATE	BY	DETECTABLE WARNINGS (TRUNCATED DOMES)	FIGURE: 7030.14
DATE: 01/29/03				SHEET 1 OF 1