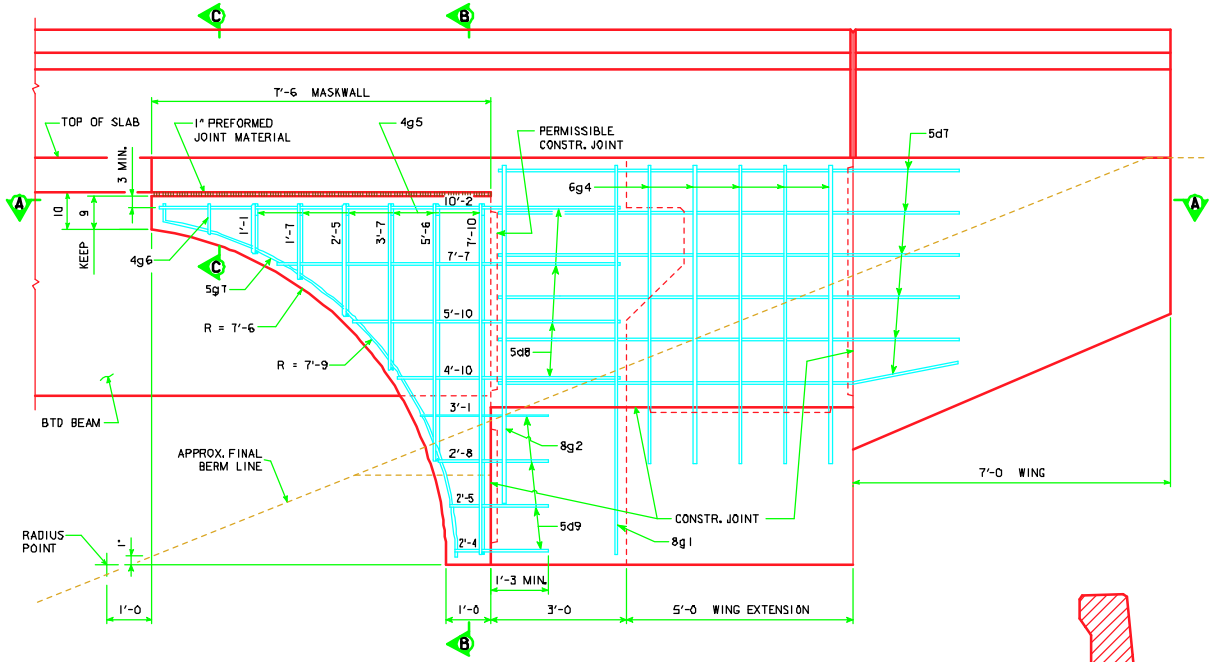

ELEVATION AT ABUTMENT

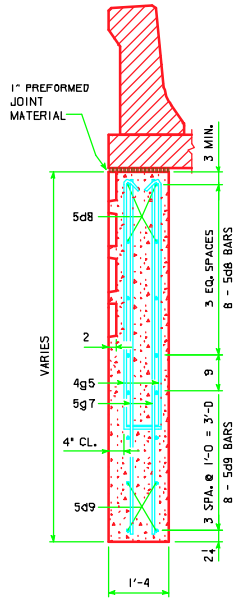

SECTION B-B



SECTION C-C

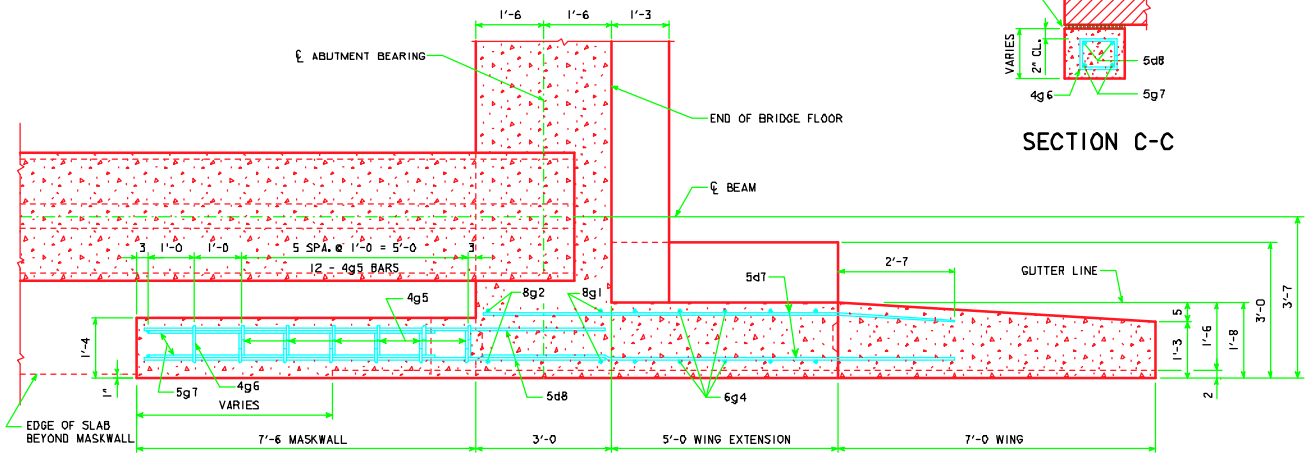

SECTION A-A

ABUTMENT & MASKWALL NOTES:

MINIMUM CLEAR DISTANCE FROM FACE OF CONCRETE TO NEAR REINFORCING BAR IS TO BE 2" UNLESS OTHERWISE NOTED OR SHOWN.

THE MASKWALL IS TO BE POURED BEFORE THE SLAB IS POURED.

SEE BT30-SA1-04 FOR QUANTITIES.

SEE BT30-SA5-04 FOR REINFORCING BAR LIST.

SEE BT30-AS1-04 FOR RUSTICATION DETAILS.

LATEST REVISION DATE

APPROVED BY BRIDGE ENGINEER

Iowa Department of Transportation
Highway Division

STANDARD DESIGN - 30' ROADWAY, 2 SPAN BRIDGES

PRETENSIONED PRESTRESSED BULB TEE CONCRETE BEAM BRIDGES

ALL SPANS — JULY, 2004

MASKWALL DETAILS

0° SKEW

BT30-AB2-04