



**PRE-MANUFACTURED DETECTABLE WARNING PANEL INSTALLATION**

PRE-MANUFACTURED DETECTABLE WARNING PANELS SHALL BE FIRMLY SUPPORTED AT ALL CORNERS ON RE-ROD OR CHAIR SUPPORTS AND PLACED INTO PLASTIC CONCRETE SIDEWALK RAMP.

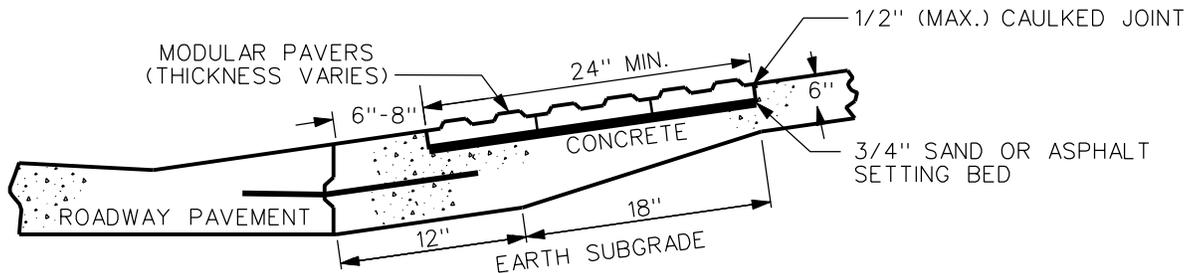

**MODULAR DETECTABLE WARNING PAVED (BRICK PAVER) INSTALLATION**

INSTALL MODULAR PAVERS AS SPECIFIED IN SECTION 7030, 3.14

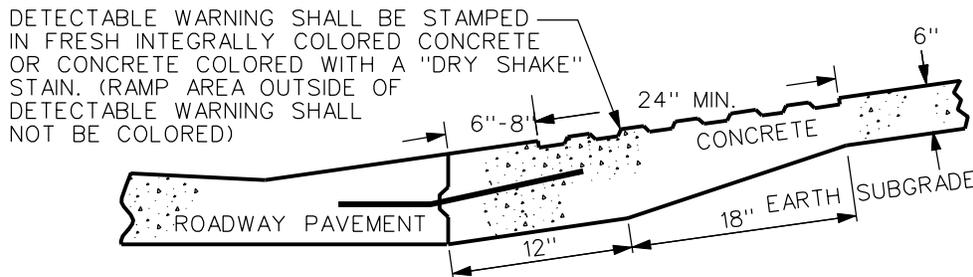

**STAMPED DETECTABLE WARNING INSTALLATION**

**NOTES:**

A 24" WIDE STRIP OF DETECTABLE WARNINGS SHALL BE INSTALLED AT THE BOTTOM OF RAMP, 6"-8" BEHIND THE BACK OF CURB. THE DETECTABLE WARNINGS SHALL EXTEND ACROSS THE FULL WIDTH OF THE RAMP. DETECTABLE WARNING SURFACES SHALL CONTRAST VISUALLY WITH ADJACENT WALKING SURFACES EITHER LIGHT ON DARK OR DARK ON LIGHT.

1	10/21/03		<b>DETECTABLE WARNINGS (TRUNCATED DOMES)</b>	FIGURE: 7030.14
REV.	DATE	BY		SHEET 1 OF 1
DATE: 01/29/03				