


Contract Item:  
Bridge Approach, RK-26  
Tabulation: 112-6

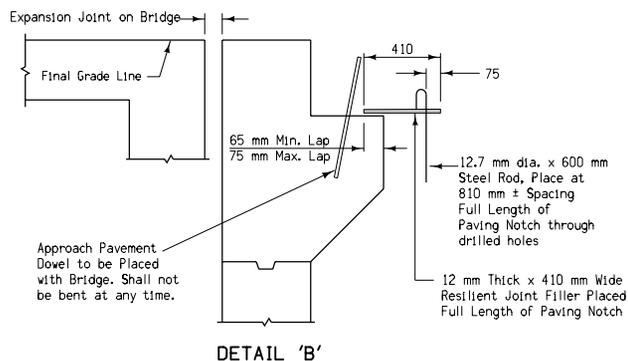

- ① 50 mm min. to 65 mm max. clear to bent bar.
- ② Minimum lap length: #15 bars - 430 mm  
#20 bars - 700 mm  
#25 bars - 1170 mm
- ③ If bridge is skewed, place additional #15 bar parallel to skewed face.

All Transverse Bars are #15.

For joint details, see Standard Road Plans RH-50, RH-51, and RH-52.

All dimensions given in millimeters unless noted.

<b>M</b> <b>METRIC VERSION</b>		
	<b>STANDARD ROAD PLAN RK-26(1)</b>	
	REVISION: Add contract item.	REVISION NO. 1
	 <small>APPROVED BY DESIGN METHODS ENGINEER</small>	REVISION DATE 10-18-05
<b>DOUBLE REINFORCED 250 mm APPROACH WITH VARIABLE DEPTH PAVING NOTCH</b> (Sheet 1 of 3)		