


- ① Build 100 millimeter Sloped Curb, unless noted otherwise in the plan.
- ② Longitudinal Joint: (Standard Road Plan RH-51)
Single Pour - Saw cut joint per detail B.
Two Pours - Use 'KS-2' Joint.
- ③ See Standard Road Plans RK-21, RK-22, or RK-23.
- ④ Design shoulder width.
- ⑤ Reinforced bridge approach section.

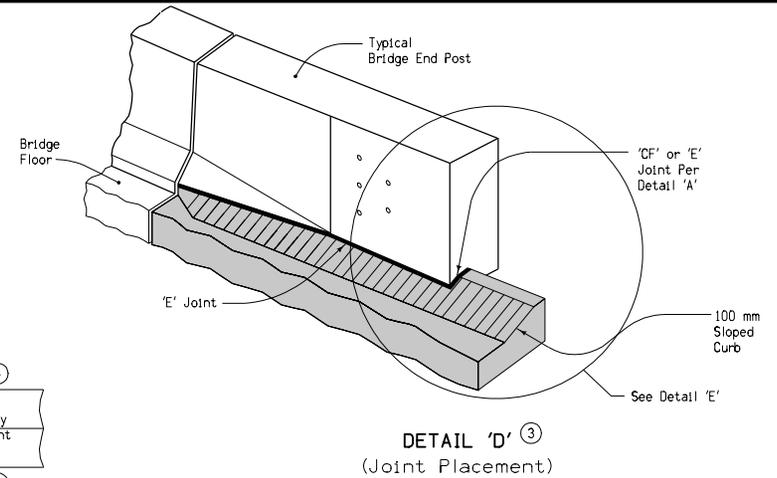

All dimensions given in millimeters unless noted.

M METRIC VERSION	Iowa Department of Transportation Highway Division	
	STANDARD ROAD PLAN RK-26(3)	
	REVISION: Add 100 mm sloped curb detail.	REVISION NO. 1
	 APPROVED BY DESIGN METHODS ENGINEER	
	REVISION DATE 10-18-05	
DOUBLE REINFORCED 250 mm APPROACH WITH VARIABLE DEPTH PAVING NOTCH (Sheet 3 of 3)		