



LEFT LANE CLOSURE

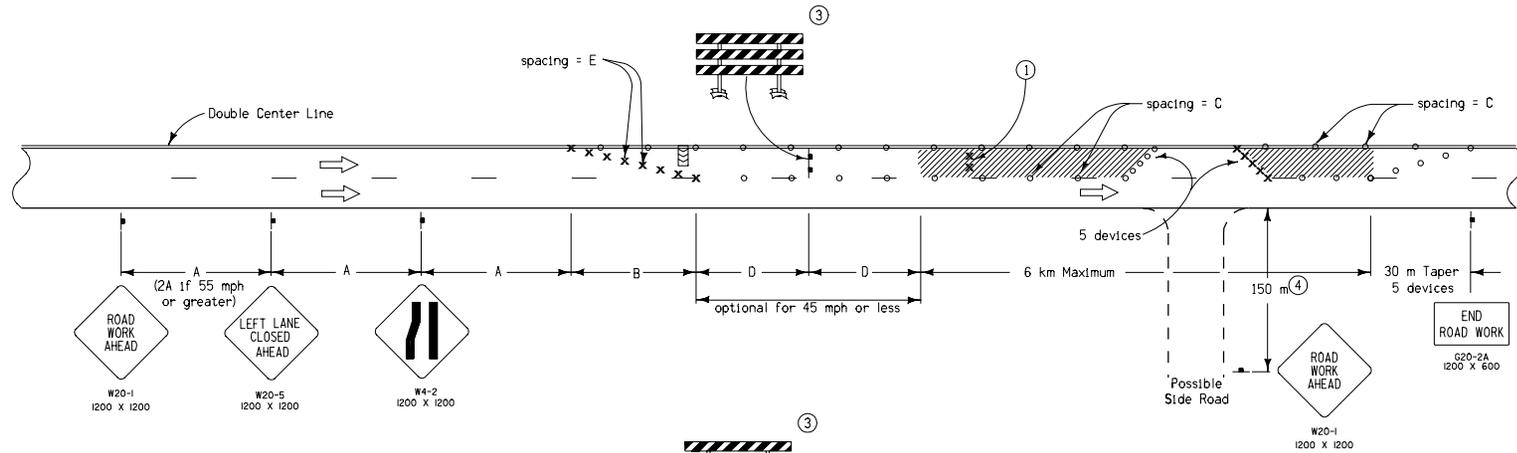

RIGHT LANE CLOSURE

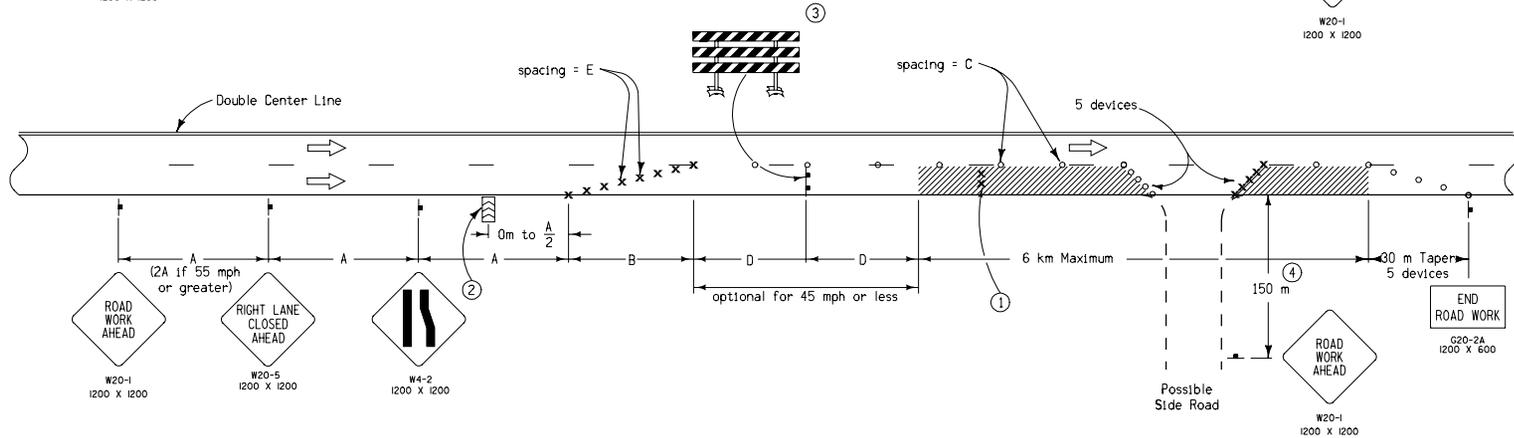

LEGEND

- Traffic Sign
- Drum
- 1050 mm Channelizer or Vertical Panel
- Type III Barricade
- Arrow Panel
- Work Area
- Direction of Traffic

SPEED LIMIT (mph)	A (m)	B (m)	C (m)	D (m)	E (m)
25 or less	91	38	12	12	8
30 - 35	150	75	24	24	11
40 - 45	213	165	24	60	14
50 - 55	305	235	24	84	17

- ① Two drums shall be placed in the closed lane at 150 meter intervals. Where core-outs, holes or uncured concrete exist within the work area, additional drums shall be placed just ahead of each.
- ② When there is no shoulder area, the arrow panel shall be placed within the closed lane behind the channelizing devices and as close to the beginning of the taper as practical.
- ③ A vehicle with an amber revolving light or amber strobe light may be substituted for the Type III barricade.
- ④ Advanced warning distance may be reduced to 61 meters when the side road speed limit is 40 mph or less.

Contract Item:
Traffic Control

All dimensions given in millimeters unless noted.

METRIC VERSION		REVISION NEW 10-17-06
		STANDARD ROAD PLAN
	REVISIONS: Replaces RS-64A and RS-64B.	
	<i>Deanna Mayfield</i> APPROVED BY DESIGN METHODS ENGINEER	

LANE CLOSURE ON UNDIVIDED HIGHWAY

TC-419
SHEET 1 of 1