


URBAN STANDARD SPECIFICATIONS for PUBLIC IMPROVEMENT MANUAL

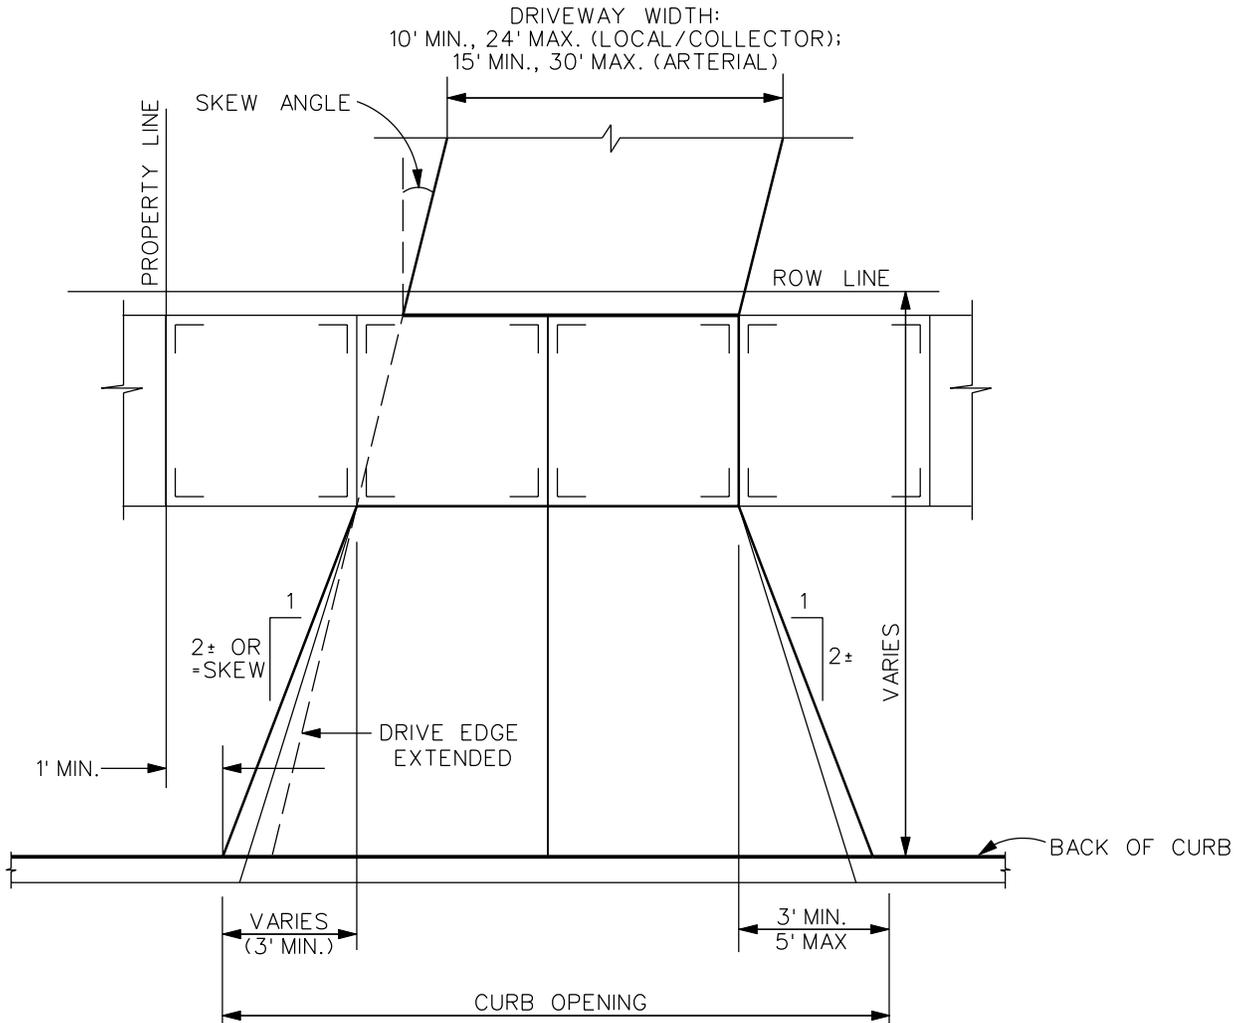

**NOTES:**

- DRIVES WITH SKEWS GREATER THAN 20° REQUIRE SPECIAL DESIGN
- REFER TO FIGURES 7030.3A AND 7030.3B FOR DRIVEWAY JOINTING AND CROSS SECTION REQUIREMENTS.
- IF SIDEWALK IS LOCATED AT, OR NEAR, BACK OF CURB, SEE FIGURE 7030.9 FOR PARALLEL RAMP REQUIREMENTS

3	10/18/05		SKEWED DRIVEWAY LAYOUT FOR NEW PAVEMENT	FIGURE: 7030.5
REV.	DATE	BY		SHEET 1 OF 1
DATE: 01-01-98				