




REVISION 09-06 - 6'-0" DIMENSION CHANGED TO 7'-1 1/4" IN SUPPORT BAY.

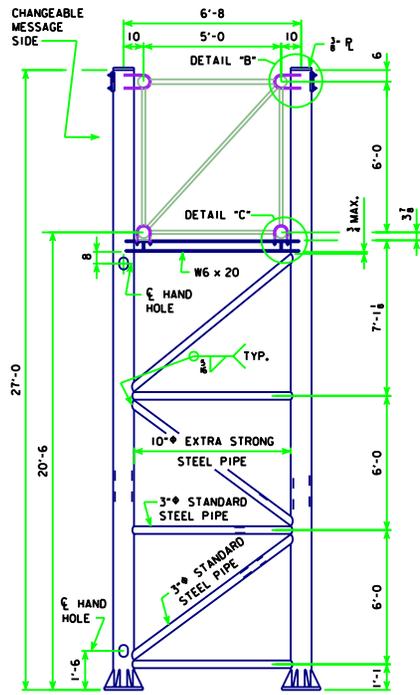

END VIEW OF TRUSS SUPPORT

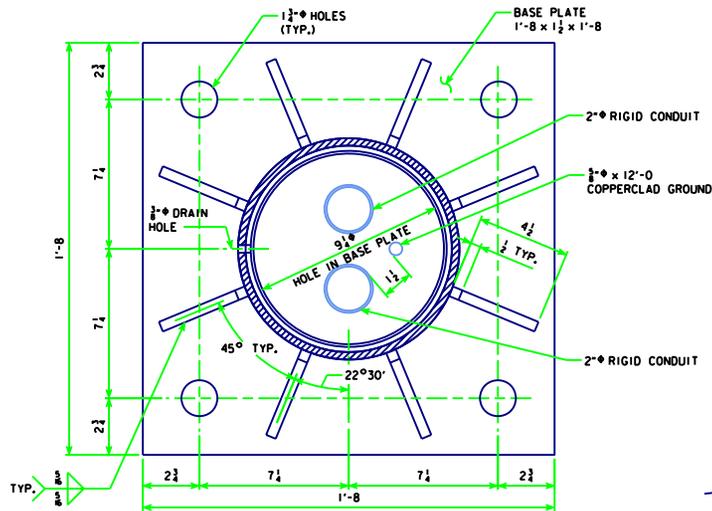


BASE PLATE PLAN

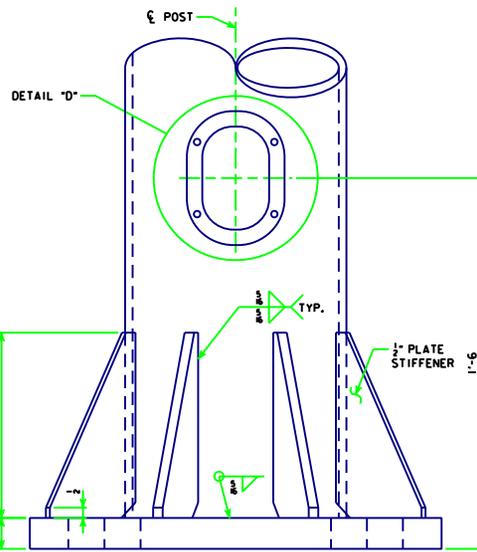


BASE SIDE VIEW

NOTE: SEE STD. SHEET STO-09-06 FOR DETAILS OF DETAIL "B" & "C".

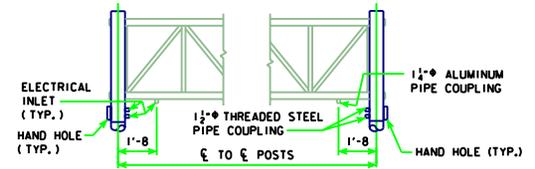

PART ELEVATION


NOTE: PROVIDE ELECTRICAL INLETS AT CHANGEABLE MESSAGE SIGN. INLETS SHALL BE NO CLOSER THAN 1'-2" TO A TRUSS PANEL POINT.

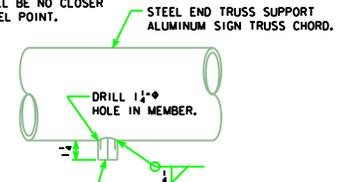


ELECTRICAL INLET

NOTE: INLET COUPLING IS TO BE STEEL OR ALUMINUM FOR FASTENING TO STEEL OR ALUMINUM MEMBERS RESPECTIVELY AND SHALL BE FITTED WITH STANDARD PLUGS UNTIL CONDUIT IS INSTALLED.

NOTE: HAND HOLES AND ELECTRICAL INLET HOLES SHALL BE IN BOTH END TRUSS SUPPORTS AND ELECTRICAL INLET HOLES IN BOTH END OVERHEAD TRUSS SECTIONS AND ON DYNAMIC MESSAGE SIDE ONLY.

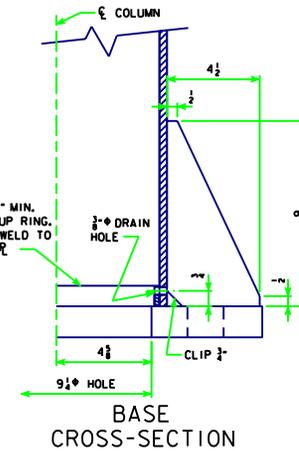

BASE CROSS-SECTION

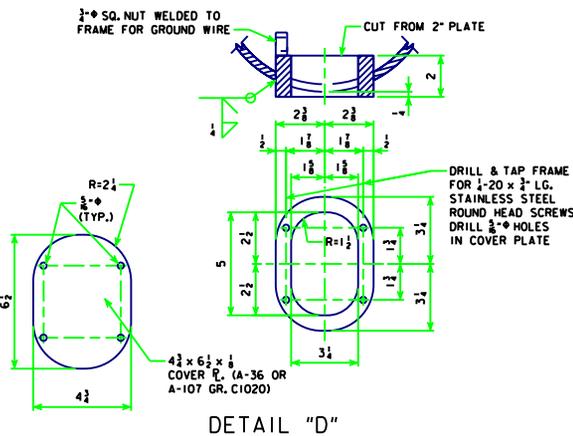

DETAIL "D"

08-06 LATEST REVISION DATE APPROVED BY BRIDGE ENGINEER		
	STANDARD DESIGN ALUMINUM OVERHEAD SIGN TRUSS WITH GALVANIZED STEEL SUPPORTS FEBRUARY, 2006	
	ELECTRICAL ACCESS & BASE PLATE DETAILS 75' TO 100' SPANS	STO-07-06 DMS