


Pay limits for contract item include the following areas:

- Double Reinforced Section
- Single Reinforced Section
- Non-Reinforced Section

- ① Build 4 inch Sloped Curb, unless noted otherwise in the plans.
- ② See RK-20, RK-25, or RK-26.
- ③ Longitudinal joint: (PV-1)
Single Pour - Saw cut joint per detail B.
Two Pours - Use 'KS-2' Joint (Double Reinforced Section).
Use 'KS-1' Joint (Single Reinforced Section).
- ④ Polymer grid and excavation limits of Modified Subbase 2' outside of pavement edge. See RK-20, RK-25, or RK-26.
- ⑤ Slope subdrain to drain.
- ⑥ An "X" shall be placed in the plastic concrete near the 'EF' joint at the outside edge of pavement.
- ⑦ 4 inch perforated subdrain (polyethylene, corrugated tubing).
- ⑧ See RF-19C or RF-19E for outlet details.
- ⑨ 'DW' or 'RT' Joint.

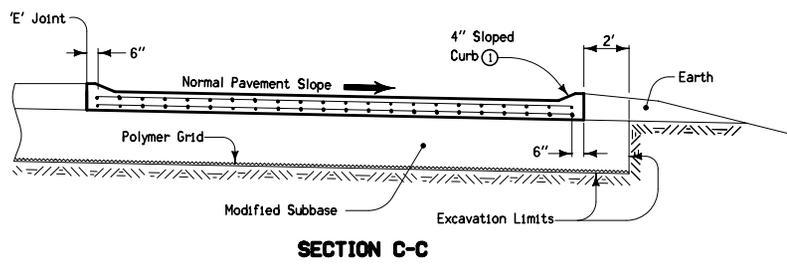

For joint details, see PV-1.

 Iowa Department of Transportation	REVISION 6 04-20-10
	RK-23
STANDARD ROAD PLAN	
REVISIONS: Updated references to renamed standards.	
<i>Deanna McFalls</i> APPROVED BY DESIGN METHODS ENGINEER	
BRIDGE APPROACH (MULTI-LANE, CURBED ROADWAY)	