


PART LONGITUDINAL SECTION NEAR GUTTER

PART END VIEW AT ABUTMENT

SECTION A-A

NOTE:  
 PLUG 3" PVC PIPE WITH  
 EXPANDING FOAM PRIOR  
 TO BACKFILLING BEHIND  
 ABUTMENTS.

NOTE:  
 FOR ELEVATION A, ELEVATION B, ELEVATION C AND  
 DIMENSION C SEE "MISCELLANEOUS DETAILS"  
 FOR THE APPROPRIATE LENGTH BRIDGE.

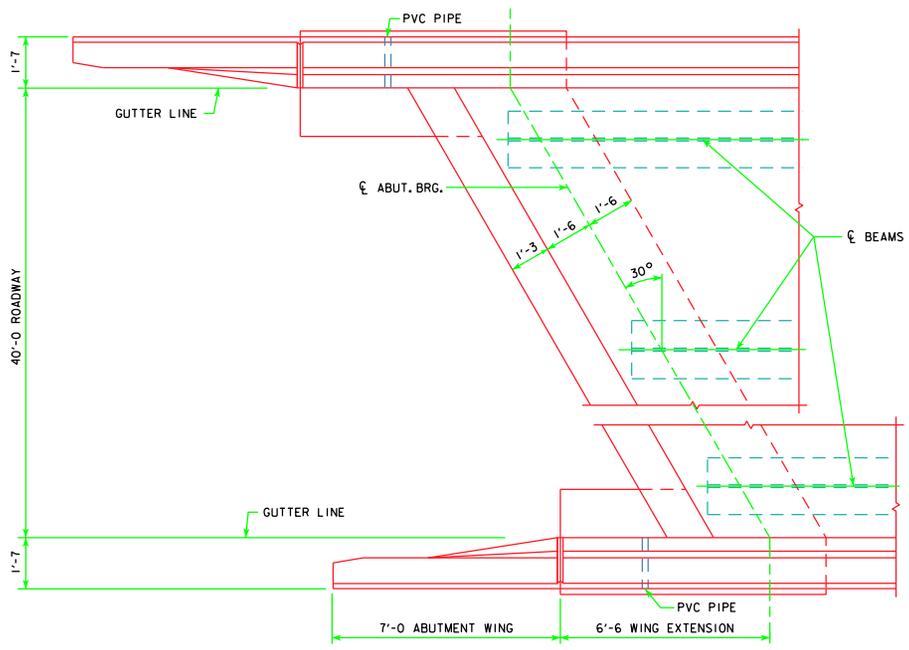

PART PLAN  
 (STEEL DIAPHRAGMS NOT SHOWN)

LATEST REVISION DATE  <i>Thomas E. Mc Donald</i> APPROVED BY BRIDGE ENGINEER		
	STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES <b>ROLLED STEEL BEAM BRIDGES</b> JUNE, 2010	
	LONGITUDINAL SECTION 30° SKEW	RS40-026-10