


Pay limits for contract item include the following areas:

- Double Reinforced Section
- Single Reinforced Section
- Non-Reinforced Section

- ① Build 4 inch Sloped Curb, unless noted otherwise in the plans.
- ② See RK-20, RK-25, or RK-26.
- ③ Longitudinal joint: (PV-1)  
Single Pour - Saw cut joint per detail B.  
Two Pours - Use 'KS-2' Joint (Double Reinforced Section).  
Use 'KS-1' Joint (Single Reinforced Section).
- ④ Polymer grid and excavation limits of Modified Subbase 2' outside of pavement edge. See RK-20, RK-25, or RK-26.
- ⑤ Slope subdrain to drain.
- ⑥ An "X" shall be placed in the plastic concrete near the 'EF' joint at the outside edge of pavement.
- ⑦ 4 inch perforated subdrain (polyethylene, corrugated tubing).
- ⑧ See RF-19C or RF-19E for outlet details.
- ⑨ 'DW' or 'RT' Joint.

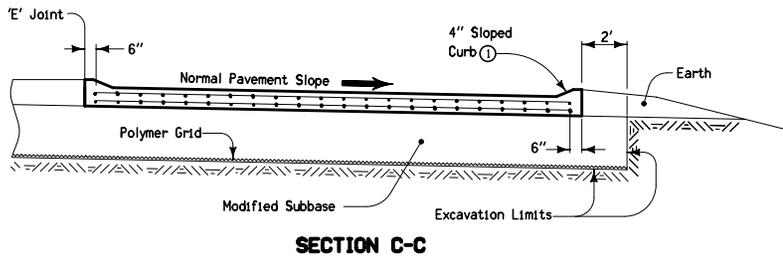

For joint details, see PV-1.

 <b>Iowa Department of Transportation</b>	REVISION 6    04-20-10
	<b>RK-23</b>
<b>STANDARD ROAD PLAN</b>	
REVISIONS: Updated references to renamed standards.	
APPROVED BY DESIGN METHODS ENGINEER	
<b>BRIDGE APPROACH (MULTI-LANE, CURBED ROADWAY)</b>	