



MODIFIED SUBBASE AND SUBDRAIN

IF LONGITUDINAL SUBDRAIN IS PRESENT OR IS TO BE PLACED

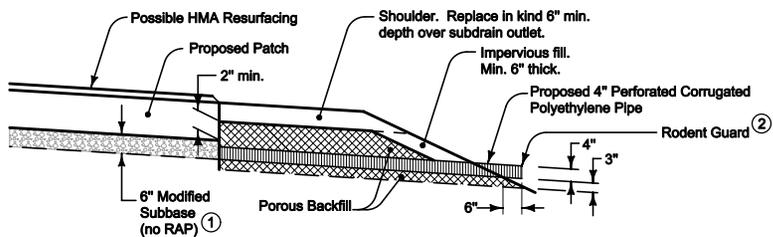

MODIFIED SUBBASE AND SUBDRAIN

WITHOUT LONGITUDINAL SUBDRAIN



DRAIN PLACEMENT

- ① 6 inches Modified Subbase (no RAP) if required by plan. When placed, extend Modified Subbase (no RAP) over longitudinal subdrain, if present.
- ② If longitudinal subdrain (shoulder) is not to be placed or if it is not present on side of roadway to be patched, then place 4 inch Perforated Corrugated PE Pipe at low end(s) of patch. Use removable grate rodent guard except for projects using recycled PCC subbase where a removable fork rodent guard is required. Refer to RF-19E for rodent guard details. Refer to Drain Placement detail.

Possible Contract Items:
Subbase (Patches)
Subdrain, Longitudinal, (Patches) 4"

Possible Tabulation:
102-6C

 Iowa Department of Transportation	REVISION
	NEW 10-19-10
STANDARD ROAD PLAN	RR-26
	SHEET 1 of 1

REVISIONS: New. Moved common Drain Placement Detail from RR-2 through RR-18. Modified drain size and subbase. Added rodent guard.

Deanna McFalls
APPROVED BY DESIGN METHODS ENGINEER

SUBBASE PATCHES