



QUARTER POINT JOINTING

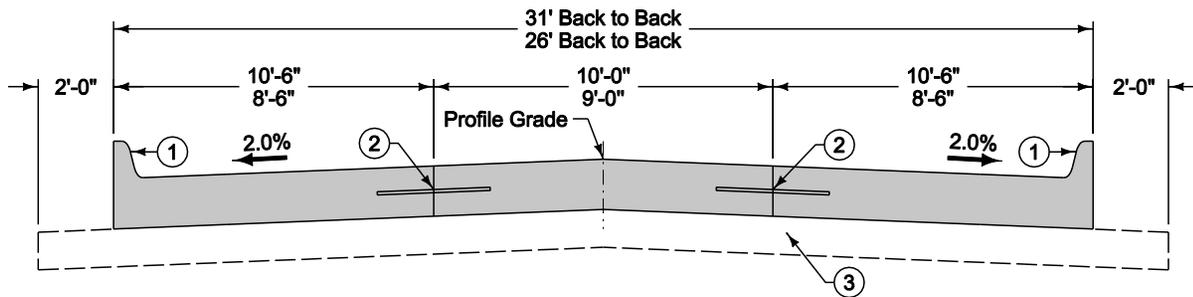

THIRD POINT JOINTING

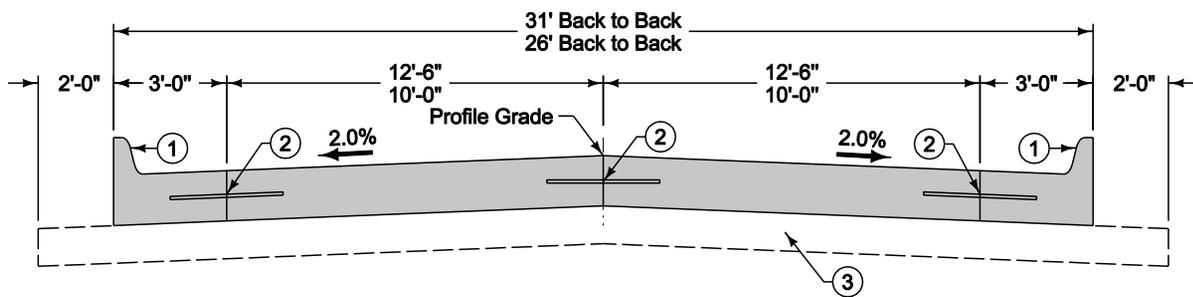

GUTTERLINE JOINTING

- ① 6 inch standard curb.
- ② BT, KT, or L joint depending on pavement thickness and construction staging.
- ③ Subbase or subgrade as specified.
- ④ Unless otherwise specified in the contract documents.
- ⑤ No dowels within 24" of the back of curb.

TRANSVERSE JOINT REQUIREMENTS ④		
Pavement Thickness	Transverse Joint Type	Transverse Joint Spacing
6"	C	12'
7"	C	15'
8"	CD ⑤	15'
9"	CD ⑤	15'
≥10"	CD ⑤	20'

	<b>SUDAS</b>	<small>REVISION</small> New 10-19-10
	<b>7010.901</b>	
	<small>SHEET 1 of 1</small>	

SUDAS Standard Specifications

PCC PAVEMENT JOINTING