



Solicitation Response

		Response Due Date 04/29/2016	Time 1:00 P.M.	Location 800 Lincoln Way, Ames, IA	
Proposal Number 16424	Description Davenport RCE Office Lighting upgrade				
Contract Begin Date May 12, 2016	Contract Completion Date June 27, 2016	Bid Bond N/A		Performance Bond (Y/N) N	Liquidated Damages N/A
Purchasing Agent assigned Jody McNaughton		E-mail Address Jody.mcnaughton@dot.iowa.gov		Phone 515-239-1298	Fax 515-239-1538
RESPONDER INFORMATION					
Company Name				Federal Tax ID	
Street Address			City	State	Zip Code
Contact Name	E-mail Address		Phone	Fax	
Responder agrees to sell goods, services or both at the same prices, terms and conditions to any other Iowa state agency, Regent or Political Subdivision upon request. Please check Yes or No. <input type="checkbox"/> Yes <input type="checkbox"/> No			Responder is an Iowa Targeted Small Business <input type="checkbox"/> Yes <input type="checkbox"/> No		

GENERAL INFORMATION

The entire contents of this solicitation; Addendums, Schedule of Prices, Specifications, Plans and Drawings, Supplemental Terms and Conditions, Standard Terms and Conditions shall become part of the contract or purchase order. **Faxed or email responses will be accepted.**

Acceptance/Rejection: The Iowa DOT reserves the right to accept or reject any or all responses and to waive irregularities or technicalities, provided such waiver does not substantially change the offer or provide a competitive advantage to a supplier or service provider. The Iowa DOT reserves the right to accept the response which is deemed to be in the best interest of the state. Any unauthorized changes, additions, or conditional responses including any ties to other solicitations or any reservations about accepting an award or entering into a contract, may result in rejection of the response. Responses must remain available for award for (30) days from the due date indicated above.

Method of Award: Award shall be made to the lowest responsible, responsive responder whose response meets the requirements of the solicitation unless otherwise specified. An Iowa responder will be given preference over an out-of-state responder when responses are equal in all aspects and are tied in price. By virtue of statutory authority preference will be given to products and provisions grown and coal produced within the State of Iowa.

Contracts: Successful contractor(s) may be sent either a formal contract or a purchase order. The contractor may not assign the contract to another party without written authorization from the Iowa DOT Purchasing Section.

Pricing and Discount: Unit prices shown in the response shall be quoted as the price per unit (e.g., gal., case, each, etc.) as stated in the solicitation. If there is a discrepancy between the unit prices, extended price, or total amount of response, the unit price shall prevail. Unless otherwise indicated, prices shall be firm for the duration of the contract or purchase order. Discounts for early payment are allowed, but not considered in award of the contract.

We certify that all materials, equipment, goods and/or services offered meet or exceed the specifications and requirements and will be supplied in accordance with the entire contents of this solicitation including delivery schedules.

Signed _____ Date _____

Schedule of Prices

Project Description: LED lighting upgrade for the Davenport DOT RCE Office

Item No.	Description	Quantity	Unit/Price	Lump Sum
1	Contractor to provide all materials, labor and equipment for an LED lighting upgrade at the Davenport DOT RCE Office	1 Job	Lump/Sum	\$ _____

I hereby certify that this response meets or exceeds the minimum requirements including specifications and addendums.

Authorized
Signature:

Contact Person:

Company:

(Print Name)

Address:

Contractor number: _____

(City) (State) (Zip Code)

Phone No: _____

Email: _____

Fax No.: _____

I acknowledge receipt of addendums: _____



Iowa Department of Transportation
Standard Terms and Conditions
For
Submission of Quotations or Bids

-INFORMAL-

Informal - means a limited solicitation type of procurement where a sufficient number of responses from qualified sources are obtained and the aggregate amount of the purchase is less than \$50,000.

The entire contents of this bid solicitation shall become a part of a contract or purchase order. In case of a discrepancy between the contents of the solicitation documents, the following items listed by descending order shall prevail:

- Addendums to the solicitation
- Solicitation-
 - Schedule of Prices
 - Specifications
 - Plans and Drawings
- Supplemental Terms and Conditions
- Standard Terms and Conditions

(Example - if there is a statement in the Specifications that contradicts a statement in the Standard Terms and Conditions, the statement in the Specifications shall apply)

Preparation of Solicitation Response: All responses must address all aspects of the solicitation. Responses must be typed or completed in ink and submitted on the forms supplied by the Iowa DOT.

Responses must be signed and received prior to the bid opening date and time indicated on the Solicitation Response page or other specified areas throughout the solicitation document. The signed, submitted quotation or bidder's proposal shall become the official response to be considered for award.

Responses may be sent by email, fax, weblink, or delivered by a courier that ensures timely delivery.

A. Solicitation

1. **Opening:** The opening of responses are made public and conducted at the Iowa DOT, Ames complex unless otherwise specified. Responses received after the time of the opening will be returned to the bidder and considered non-compliant.
2. **Communications:** Questions concerning this solicitation should be directed to the purchasing agent listed on the Solicitation Response page. Inquiries can be written, phoned, or faxed. In all cases, written communication will take precedence over verbal communication.
3. **Pricing and Discount:** Unit prices shown on the response shall be quoted as the price per unit (e.g., gal., case, each, etc.) as stated in the solicitation. If there is a discrepancy between the unit bid prices, extended price, or total amount of response, the unit prices shall prevail. Unless otherwise indicated, prices shall be firm for the duration of the contract or purchase order. Discounts for early payment are allowed, but not considered in award of the contract.
4. **Acceptance/Rejection:** The Iowa DOT or provider reserves the right to accept or reject any or all responses and to waive irregularities or technicalities, provided such waiver does not substantially change the offer or provide a competitive advantage to any supplier(s). The Iowa DOT also reserves the right to accept that response which is deemed to be in the best interests of the state. Any unauthorized changes, additions, or conditional response including any ties to another response or any reservations about accepting an award or entering into a contract, may result in rejection of the response. Responses must remain available for award for thirty (30) days from date of opening.

5. **Bid Results & Disclosure:** Tabulation results will be sent to all responders and may be posted on the Iowa DOT website at www.iowadot.gov/purchasing under the *Bid Award* link referencing the proposal number with an award recommendation indicated. At the conclusion of the selection process, the contents of all received responses will be placed in the public domain and be open to inspection by interested parties, according to state law. Trade secrets or proprietary information that are recognized as such and are protected by law may be withheld if clearly identified.
6. **Quality of Goods:** All material shall be new and of first quality. Items which are used, demonstrators, refurbished, obsolete, seconds, or which have been discontinued are unacceptable without prior written approval by the Iowa DOT.
7. **Recycled Content:** The Iowa Code encourages purchase of products and materials with recycled content, including but not limited to paper products, oils, plastic products, compost materials, aggregate, solvents, and rubber products. Recycled items or alternatives must be noted in the Solicitation Response, if known.
8. **Shipping Terms:** Deliveries shall be F.O.B. Destination unless otherwise specified. All deliveries shall be accompanied by a packing slip indicating the Supplier, quantities shipped, and the purchase order number(s). All delivery charges shall be included in the response price and paid by the Supplier. No collect C.O.D. deliveries shall be accepted. When entering into a contract, the Supplier shall notify the freight company that all freight and delivery charges are to be prepaid by the Supplier. Goods delivered to the Iowa DOT Distribution Center at 800 Lincoln Way, Ames, IA shall be received between the hours of 7:00 a.m. and 3:00 p.m. on any day except Saturday, Sunday, or a holiday. For deliveries to other Iowa DOT locations, the Supplier may contact the destination location for available times to deliver as not all Iowa DOT locations have the same business hours. The Iowa DOT will not be liable for any freight claims or unpaid freight bills arising from contract or purchase order issues.

B. Award

The binding agreement (award) may be issued in the form a purchase order or contract or both depending on the requirements and complexity of the agreement.

1. **Method of Award:** Award shall be made to the lowest responsible, responsive responder whose response meets the requirements of the solicitation unless otherwise specified. An Iowa company or individual will be given preference over an out-of-state company or individual when responses are equal in all aspects and are tied in price. By virtue of statutory authority preference will be given to products and provisions grown and coal produced within the State of Iowa.
2. **Award Protests:** Protests of award recommendations are to be addressed to the Director of Purchasing, and shall be made in accordance with paragraph 761--20.4(6)"e" of the Iowa Administrative Code.
3. **Contracts:** Successful contractor(s) may be sent a formal Contract, Notification of Award or Purchase Order as confirmation of acceptance and award. Any of these binding agreements shall be for the term stated in the solicitation or on a purchase order and may be renewed for additional period(s) under the same terms and conditions upon mutual agreement as defined. The successful responder may not assign a contract to another party without written authorization from the Iowa DOT Purchasing Section. The Iowa DOT may offer a contract extension to the Contractor when a scheduled target date cannot be met.
4. **Consumer Price Index (CPI-U):** A CPI may be allowed as specified in the terms of the solicitation and at the discretion of the Iowa DOT based on currently posted CPI-U, US City Average, All Items – non seasonally adjusted unless otherwise specified. This applies each of any subsequent renewals, extensions, amendments issued under the contract for the duration of the contract.

5. **Payment Terms:** The Iowa DOT typically pays properly submitted vendor invoices within thirty (30) days of receipt, providing goods and/or services have been successfully delivered, installed or inspected (if required), and accepted. Invoices presented for payment must be only for quantities received by the Iowa DOT and must reference the purchase order number or contract to be submitted for processing.
6. **Default (Supplier):** Failure of the Supplier to adhere to specified delivery schedules or to promptly replace rejected materials shall render the Supplier liable for all costs in excess of the bid price when alternate procurement is necessary. This shall not be the exclusive remedy and the Iowa DOT reserves the right to pursue other remedies available to it by law or under the terms of the binding agreement.
7. **Default (Contractor):** Failure of a Contractor other than a Supplier to meet any specified project completion deadline shall render the Contractor liable for all costs incurred by the Iowa DOT that were: a) necessary to meet said deadline; or b) necessary to complete said project after said deadline. This shall not be the exclusive remedy and the Iowa DOT reserves the right to pursue other remedies available to it by law or under the terms of the agreement.

C. General

1. **Administrative Rules:** For additional details on the rules governing the action of the Iowa DOT Purchasing Section, refer to 761IAC, Chapter 20, Iowa Administrative Code, entitled "Procurement of Equipment, Materials, Supplies and Services".
2. **Affirmative Action:** The Contractor (and also subcontractor, vendor, service provider or supplier) is prohibited from engaging in discriminatory employment practices forbidden by federal and state law, executive orders and rules of the Iowa Department of Management, pertaining to equal employment opportunity and affirmative action. Contractor may be required to have a copy of their affirmative action program on file, containing goal and time specifications. Contractors doing business with Iowa in excess of \$5,000 annually and employing 50 or more full time employees may be required to file with the Iowa Department of Management a copy of their affirmative action plan. Failure to fulfill these non-discrimination requirements may cause the contract to be canceled and the contractor declared ineligible for future state contracts or subject to other sanctions as provided by law or rule.
3. **Applicable Law:** The contract shall be governed under the laws of the State of Iowa. The contractor shall at all times comply with and observe all federal and state laws, local laws, ordinances, and regulations which are in effect during the period of a contract and which in any manner affect the work or its conduct. Any legal action relating to a contract shall only be commenced in the Story County, Iowa, District Court or the United States District Court for the Southern District of Iowa.
4. **Conflict of Interest:** No state or county official or employee, elective or appointive shall be directly or indirectly interested in any contract issued by the Iowa DOT, see Code of Iowa 314.2.
5. **Debarment and Vendor Suspension:** By submitting a response, the contractor is certifying that it and its principals and/or subcontractors are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by the State of Iowa or any Federal department or agency.
6. **Equal Opportunity:** Responders to the solicitation must be an "Equal Opportunity Employer" as defined in the Civil Rights Act of 1964 and in Iowa Executive Order Number Thirty-four.
7. **Indemnification-Goods:** To the extent the goods are not manufactured in accordance with Iowa DOT's designs, Supplier shall defend, indemnify and hold harmless Iowa DOT, its assignees, and other users of the goods from and against any claim of infringement of any letters patent, trade names, trademarks, copyright or trade secrets by reason of sale or use of any articles purchased. Iowa DOT shall promptly notify Supplier of any such claim.
8. **Infringement:** Goods shall be delivered free of the rightful claim of any third party by way of infringement. Contractor shall indemnify and save harmless the State of Iowa and the Iowa DOT against all claims for infringement of, and/or royalties claimed under, patents or copyrights on materials and equipment furnished under this bid.
9. **Iowa Open Records Law:** All Solicitation Responses are subject to terms and provisions of Iowa Code Chapter 22 Examination of Public Records (Open Records), specifically 22.7- Confidential Records.

10. **Records Audit:** The contractor agrees that the Auditor of the State of Iowa or any authorized representative of the state, and where federal funds are involved, the Comptroller General of the U.S. Government, shall have access to and the right to examine, audit, excerpt, and transcribe any directly pertinent books, documents, papers, and records of the contractor relating to orders, invoices, or payments of a contract or purchase order.
11. **Targeted Small Businesses:** The Iowa DOT seeks to provide opportunities for women and/or minority small business enterprises. To apply for certification as an Iowa Targeted Small Business, contact the Iowa Department of Inspection and Appeals (515-281-5796). Contractors shall take documented steps to encourage participation from Targeted Small Businesses for the purpose of subcontracting and supplying of goods or services or both.
12. **Taxes:** Prices quoted shall not include state or federal taxes from which the state is exempt. Exemption certificates will be furnished upon request.
13. **Termination:**
 - **Termination Due to Lack of Funds or Change in Law**

The Iowa DOT shall have the right to terminate this Contract without penalty by giving thirty (30) days written notice to the vendor as a result of any of the following:

 - Adequate funds are not appropriated or granted to allow the Iowa DOT to operate as required and to fulfill its obligations under contract.
 - Funds are de-appropriated or not allocated or if funds needed by the Iowa DOT, at the Iowa DOT's sole discretion, are insufficient for any reason.
 - The Iowa DOT's authorization to operate is withdrawn or there is a material alteration in the programs administered by the Iowa DOT.
 - The Iowa DOT's duties are substantially modified.

Following a 30 day written notice, the Iowa DOT may terminate a binding agreement in whole or in part without the payment of any penalty or incurring any further obligation to the Supplier. Following termination upon notice, the Supplier shall be entitled to compensation upon submission of invoices and proper proof of claim for goods and services under contract up to and including the date of termination.

Section 1 Introduction & Solicitation Information

1.1 Purpose

The purpose of this Request for Bid (RFB) is to solicit responses from responsible, responsive bidders to provide the goods and/or services identified and described below as specifically described in Section 2 of this solicitation.

1.2 General

The owner of goods and/or services sought shall be the Iowa Department of Transportation (Iowa DOT).

1.2.1 Project Location 8721 Northwest Blvd., Davenport, IA 52809

1.2.2 Issuing Agent

The Issuing Agent, identified on the Solicitation Response page is the sole point of contact regarding the RFB from the date of issuance until the notice of intent to award is issued (selection of the successful bidder).

1.2.3 RFB posted on the Internet

Bidders are required to visit the Iowa DOT's website at: www.iowadot.gov/purchasing/lettingschedule periodically for any and all addendums or other pertinent information regarding this solicitation.

The Iowa DOT must receive responses either **electronically or by standard mail on or before** the deadline on the Solicitation Response page. Any responses received after this deadline may be rejected.

Bidders must furnish all information necessary to be considered for award. Responses that fail to meet the mandatory requirements of the RFB will be disqualified. Verbal information provided by bidders shall not be considered part of the bidders' response.

1.2.4 Clarification

If a Bidder requires additional information to understand specifications found in Section 2 or any other part of the solicitation, all questions must be received in writing no less than 24 hours prior to the bid opening. The Iowa DOT reserves the right to contact Bidders after receiving responses for the purpose of clarification to ensure mutual understanding.

1.2.5 No Minimum Guaranteed Purchase

It is understood that the Iowa DOT considers this a best estimate only of requirements and makes no firm quantity commitment.

1.2.6 Incurring Costs

The costs of preparation and delivery of a response are solely the responsibility of the Bidder. No payments shall be made by the Iowa DOT to cover costs incurred by any Bidder for the preparation of any response.

1.2.7 A.I.A compliance

"THE GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION", A.I.A. FORM #A-201, LATEST EDITION AND A.I.A. DOCUMENT, "INSTRUCTIONS TO BIDDERS", FORM #A-701, LATEST EDITION, SHALL BE INCLUDED, AS MODIFIED IN THE "SUPPLEMENTARY INSTRUCTIONS TO BIDDERS" AND "SUPPLEMENTARY GENERAL CONDITIONS", AND BOUND WITH THE STANDARD FORM OF AGREEMENT BETWEEN THE CONTRACTOR AND OWNER", A.I.A. FORM #101, LATEST EDITION, AS A PART OF THIS CONTRACT SPECIFICATION.

1.2.8 Pre-bid Information

Non- Required Pre- bid meeting with site visit. This is not a mandatory meeting but is highly recommended that prospective bidders attend the following scheduled meeting where DOT staff will be available to show you the site visit.

Pre-bid Date: April 22, 2016 Time: 2:00 p.m. Location: 8721 Northwest Blvd., Davenport, IA 52809

Site visit to start at 2:00 p.m. with a brief conference call at the end of the site visit to address any questions contractors have regarding the proposal & site visit.

Contractors interested in attending are to register for the pre-bid meeting by calling Jody McNaughton before **April 19, 2016**.

- No considerations or revision in the contract price or scope of the project will be considered by the Iowa DOT for any item which could have been revealed by a thorough on-site inspection and examination or pre- bid meeting.

Section 2 Specifications & Contractor Responsibilities

2.1 Purpose

The Iowa DOT is seeking qualified bidders to provide a bid response for an LED lighting upgrade to the Davenport DOT maintenance facility.

2.2 Specifications

Contractor to provide all materials, labor and equipment necessary to remove the existing fluorescent lamps, ballasts and lenses as indicated in the additional mandatory specifications included after section 3.5.

Contractor to install new ballasts, LED lamps, and diffuser lenses.

Contractor to replace some fixtures and make repairs as indicated in the plans and specifications.

Contractor must have at the time of the award a contractor number as referenced in section 2.7 of this proposal.

Contractors must be licensed general contractors

All work must be completed on or before June 27, 2016

2.3 Contractor Responsibilities

2.3.1 Sub-Contractors

The Successful Bidder for the project shall furnish the Iowa DOT with a complete list of subcontractors and major material suppliers at the pre-construction meeting.

The Iowa DOT shall approve and maintain the list of subcontractors and major suppliers and issue a general approval of same after official award of the contract, subject to the specific requirements of the Plans, Specifications and the "General Conditions of the Contract, and of these supplementary Conditions," "Special Provisions," and elsewhere with contract documents, as applicable. Deviations from the list of subcontractors and material suppliers shall be made only with the specific approval of, or at the request of the Iowa DOT.

2.3.2 Verifying Work of Others

When a Contractor's work depends on proper execution of work by other contractors, such Contractor shall promptly report to the Iowa DOT project manager any defects in such work and/or discrepancies between executed work plans, drawings or specifications.

2.3.3 Safety Data Sheets (SDS)

The vendor shall include with proposal a SDS of materials bid for which these sheets apply. The successful bidder must furnish a SDS with all material delivered.

2.3.4 Guarantee

The Guarantee shall include, but not be limited to the following elements and services:

a. Repair or replace defective materials, equipment, workmanship and installation that develops within the guarantee period, promptly and to Iowa DOT's satisfaction and correct damage caused in making necessary repairs and replacements, including all other damage done to areas, materials, and other systems resulting from the failure or defect, under guarantee by and at the expense of the Contractor.

b. Replace material or equipment that requires excessive service during guarantee period, as defined and as directed by the Iowa DOT.

**SECTION 00 0101
PROJECT TITLE PAGE**



PROJECT MANUAL FOR:

IOWA DEPARTMENT OF TRANSPORTATION

DAVENPORT RCE OFFICE - NEW LED LIGHTS

**DAVENPORT MAINTENANCE FACILITY
SECOND FLOOR OFFICE
8721 NORTHWEST BLVD.
DAVENPORT, IA 52809**

PROJECT NUMBER: BG-1D11(011)-80-82

DATE: MARCH 7, 2015

**SECTION 00 0110
TABLE OF CONTENTS**

PROCUREMENT AND CONTRACTING REQUIREMENTS

1.01 DIVISION 00 -- PROCUREMENT AND CONTRACTING REQUIREMENTS

- A. 00 0101 - Project Title Page
- B. 00 0110 - Table of Contents
- C. 00 0115 - List of Drawing Sheets

SPECIFICATIONS

2.01 DIVISION 01 -- GENERAL REQUIREMENTS

- A. 01 1000 - Summary
- B. 01 2000 - Price and Payment Procedures
- C. 01 3000 - Administrative Requirements
- D. 01 4000 - Quality Requirements
- E. 01 5000 - Temporary Facilities and Controls
- F. 01 6000 - Product Requirements
- G. 01 7000 - Execution and Closeout Requirements
- H. 01 7419 - Construction Waste Management and Disposal
- I. 01 7800 - Closeout Submittals

2.02 DIVISION 02 -- EXISTING CONDITIONS

- A. 02 4100 - Demolition

2.03 DIVISION 09 -- FINISHES

- A. 09 9123 - Interior Painting

2.04 DIVISION 26 -- ELECTRICAL

- A. 26 5100 - Interior Lighting

END OF SECTION

**SECTION 00 0115
LIST OF DRAWING SHEETS**

A-1 CEILING PLAN AND DETAILS

END OF SECTION

SECTION 01 1000
SUMMARY

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Contract description.
- B. Owner supplied products.
- C. Contractor's use of site and premises.
- D. Owner occupancy.
- E. Specification Conventions.

1.02 PROJECT

- A. Project Name: Davenport RCE Office - New LED Lights
- B. Owner Name: Iowa Department of Transportation.
- C. Architect's Name: Iowa Department of Transportation.
- D. The Project consists of the removal of existing fluorescent lamps, ballasts and lenses as indicated. Install new ballasts, LED lamps, and diffuser lenses. Replace some fixtures and make repairs as indicated.

1.03 CONTRACT DESCRIPTION

- A. Contract Type: Stipulated price as described in Standard form of Agreement Between the Contractor and Owner, AIA Form A101, latest Edition.

1.04 OWNER SUPPLIED PRODUCTS

- A. Owner's Responsibilities:
 - 1. Arrange for and deliver Owner-reviewed Shop Drawings, Product Data, and Samples, to Contractor.
 - 2. Arrange and pay for delivery to site.
 - 3. On delivery, inspect products jointly with Contractor.
 - 4. Submit claims for transportation damage and replace damaged, defective, or deficient items.
 - 5. Arrange for manufacturers' warranties, inspections, and service.
- B. Contractor's Responsibilities:
 - 1. Review Owner-reviewed Shop Drawings, Product Data, and Samples.
 - 2. Receive and unload products at site; inspect for completeness or damage jointly with Owner.
 - 3. Handle, store, install and finish products.
 - 4. Repair or replace items damaged after receipt.

1.05 DESCRIPTION OF ALTERATIONS WORK

- A. Scope of demolition and removal work is shown on drawings.
- B. Scope of alterations work is shown on drawings.

1.06 OWNER OCCUPANCY

- A. Owner intends to continue to occupy all portions of the existing building during the entire construction period.
- B. Construction, including punch list items, must be completed no later than the following date: 30 calendar days after start of contract.
 - 1. The Contractor has the option to start construction and complete construction within the 30 day window.
 - a. Once Contractor begins construction, the work must proceed without delay until project is completed.

2. No extensions or additional payments will be allowed when Contractor delayed starting project 60 calendar days after start of contract.
- C. Cooperate with Owner to minimize conflict and to facilitate Owner's operations.
- D. Schedule the Work to accommodate Owner occupancy.

1.07 CONTRACTOR USE OF SITE

- A. Arrange use of site and premises to allow:
 1. Owner occupancy.
 2. Work by Others.
 3. Work by Owner.
 4. Use of site and premises by the public.
- B. Provide access to and from site as required by law and by Owner:
 1. Emergency Building Exits During Construction: Keep all exits required by code open during construction period; provide temporary exit signs if exit routes are temporarily altered.
 2. Do not obstruct roadways, sidewalks, or other public ways without permit.
- C. Existing building spaces may not be used for storage.
- D. Time Restrictions:
 1. Contractor may perform construction operations any day of the week and at any time of the day, but must have a representative present during any Sub-Contractor work. All work outside of business hours must be coordinated with local garage staff.
- E. Utility Outages and Shutdown:
 1. Limit disruption of utility services to hours the building is unoccupied.
 2. Do not disrupt or shut down life safety systems, including but not limited to fire sprinklers and fire alarm system, without 7 days notice to Owner and authorities having jurisdiction.
 3. Limit shutdown of utility services to 2 hours at a time, arranged at least 24 hours in advance with Owner.
 4. Prevent accidental disruption of utility services to other facilities.

1.08 SPECIFICATION CONVENTIONS

- A. These specifications are written in imperative mood and streamlined form. This imperative language is directed to the Contractor, unless specifically noted otherwise. The words "shall be" are included by inference where a colon (:) is used within sentences or phrases.
- B. The following terms are used throughout the specifications and defined as follows:
 1. Contractor: General Contractor or contractor responsible for Work of specified section
 2. Owner: Representative of building occupants.
 3. Architect/Engineer: Representative of Facilities Support.

1.09 SPECIFICATION SECTIONS APPLICABLE TO ALL CONTRACTS

- A. Unless otherwise noted, all provisions of the sections listed below apply to all contracts. Specific items of work listed under individual contract descriptions constitute exceptions.
- B. Section 01 3000 - Administrative Requirements.
- C. Section 01 4000 - Quality Requirements.
- D. Section 01 6000 - Product Requirements.
- E. Section 01 7000 - Execution and Closeout Requirements.
- F. Section 01 7419 - Construction Waste Management and Disposal.
- G. Section 01 7800 - Closeout Submittals.

END OF SECTION

SECTION 01 2000
PRICE AND PAYMENT PROCEDURES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Procedures for preparation and submittal of applications for progress payments.
- B. Documentation of changes in Contract Sum and Contract Time.
- C. Change procedures.
- D. Correlation of Contractor submittals based on changes.
- E. Procedures for preparation and submittal of application for final payment.

1.02 SCHEDULE OF VALUES

- A. Form to be used: AIA G702 - Application and Certificate of Payment, AIA G703 - Continuation Sheet..
- B. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit draft to Architect for approval.
- C. Forms filled out by hand will not be accepted.
- D. Submit Schedule of Values in duplicate within 15 days after date of Owner-Contractor Agreement.
- E. Format: Utilize the Table of Contents of this Project Manual. Identify each line item with number and title of the specification Section. Identify site mobilization.
- F. Include in each line item, the amount of Allowances specified in this section. For unit cost Allowances, identify quantities taken from Contract Documents multiplied by the unit cost to achieve the total for the item.
- G. Include separately from each line item, a direct proportional amount of Contractor's overhead and profit.
- H. Revise schedule to list approved Change Orders, with each Application For Payment.

1.03 APPLICATIONS FOR PROGRESS PAYMENTS

- A. Payment Period: Submit at intervals stipulated in the Agreement.
- B. Form to be used: AIA G702 - Application and Certificate of Payment and AIA G703 - Continuation Sheet..
- C. Forms filled out by hand will not be accepted.
- D. For each item, provide a column for listing each of the following:
 - 1. Item Number.
 - 2. Description of work.
 - 3. Scheduled Values.
 - 4. Previous Applications.
 - 5. Work in Place and Stored Materials under this Application.
 - 6. Authorized Change Orders.
 - 7. Total Completed and Stored to Date of Application.
 - 8. Percentage of Completion.
 - 9. Balance to Finish.
 - 10. Retainage.
- E. Execute certification by signature of authorized officer.
- F. Use data from approved Schedule of Values. Provide dollar value in each column for each line item for portion of work performed and for stored products.
- G. Submit three copies of each Application for Payment.
- H. Include the following with the application:
 - 1. Construction progress schedule, revised and current as specified in Section 01 3000.

1.04 MODIFICATION PROCEDURES

- A. For minor changes not involving an adjustment to the Contract Sum or Contract Time, Architect will issue instructions directly to Contractor.
- B. For other required changes, Architect will issue a document signed by Owner instructing Contractor to proceed with the change, for subsequent inclusion in a Change Order.
 - 1. The document will describe the required changes and will designate method of determining any change in Contract Sum or Contract Time.
 - 2. Promptly execute the change.
 - 3. Contractor will not begin work prior to signature and approval of Change Order by Architect, IDOT, and Contractor. If work is done prior to approval of Change Order by all parties, the contractor will not receive remuneration and may be required to change the project back per the original plans at the behest of the Architect.
- C. For changes for which advance pricing is desired, Architect will issue a document that includes a detailed description of a proposed change with supplementary or revised drawings and specifications, a change in Contract Time for executing the change with a stipulation of any overtime work required and the period of time during which the requested price will be considered valid. Contractor shall prepare and submit a fixed price quotation within 7 days.
- D. Contractor may propose a change by submitting a request for change to Architect, describing the proposed change and its full effect on the Work, with a statement describing the reason for the change, and the effect on the Contract Sum and Contract Time with full documentation and a statement describing the effect on Work by separate or other contractors. Document any requested substitutions in accordance with Section 01 6000.
- E. Computation of Change in Contract Amount: As specified in the Agreement and Conditions of the Contract.
 - 1. For change requested by Contractor, the amount will be based on the Contractor's request for a Change Order as approved by Architect.
- F. Substantiation of Costs: Provide full information required for evaluation.
 - 1. On request, provide the following data:
 - a. Quantities of products, labor, and equipment.
 - b. Overhead and profit.
 - c. Credit for deletions from Contract, similarly documented.
- G. Execution of Change Orders: Architect will issue Change Orders for signatures of parties as provided in the Conditions of the Contract.
- H. After execution of Change Order, promptly revise Schedule of Values and Application for Payment forms to record each authorized Change Order as a separate line item and adjust the Contract Sum.
- I. Promptly revise progress schedules to reflect any change in Contract Time, revise sub-schedules to adjust times for other items of work affected by the change, and resubmit.

1.05 APPLICATION FOR FINAL PAYMENT

- A. Prepare Application for Final Payment as specified for progress payments, identifying total adjusted Contract Sum, previous payments, and sum remaining due.
- B. Application for Final Payment will not be considered until the following have been accomplished:
 - 1. All closeout procedures specified in Section 01 7000.
 - 2. All punchlist items have been completed..

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

SECTION 01 3000
ADMINISTRATIVE REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Preconstruction meeting.
- B. Progress meetings.
- C. Construction progress schedule.
- D. Coordination drawings.
- E. Submittals for review, information, and project closeout.
- F. Number of copies of submittals.
- G. Submittal procedures.

1.02 RELATED REQUIREMENTS

- A. Section 01 7000 - Execution and Closeout Requirements: Additional coordination requirements.
- B. Section 01 7800 - Closeout Submittals: Project record documents.

1.03 PROJECT COORDINATION

- A. Project Coordinator: Construction Manager.
- B. Cooperate with the Project Coordinator in allocation of mobilization areas of site; for field offices and sheds, for site access, traffic, and parking facilities.
- C. During construction, coordinate use of site and facilities through the Project Coordinator.
- D. Comply with Project Coordinator's procedures for intra-project communications; submittals, reports and records, schedules, coordination drawings, and recommendations; and resolution of ambiguities and conflicts.
- E. Comply with instructions of the Project Coordinator for use of temporary utilities and construction facilities.
- F. Coordinate field engineering and layout work under instructions of the Project Coordinator.
- G. Make the following types of submittals to Architect through the Project Coordinator:
 - 1. Requests for interpretation.
 - 2. Requests for substitution.
 - 3. Shop drawings, product data, and samples.
 - 4. Test and inspection reports.
 - 5. Design data.
 - 6. Manufacturer's instructions and field reports.
 - 7. Applications for payment and change order requests.
 - 8. Progress schedules.
 - 9. Coordination drawings.
 - 10. Correction Punch List and Final Correction Punch List for Substantial Completion.
 - 11. Closeout submittals.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 PRECONSTRUCTION MEETING

- A. Owner will schedule a meeting after Notice of Award.
- B. Attendance Required:
 - 1. Owner.
 - 2. Architect.
 - 3. Contractor.
- C. Agenda:

1. Submission of list of Subcontractors, list of Products, schedule of values, and progress schedule.
 2. Designation of personnel representing the parties to Contract, Owner and Architect.
 3. Procedures and processing of field decisions, submittals, substitutions, applications for payments, proposal request, Change Orders, and Contract closeout procedures.
 4. Scheduling.
- D. Record minutes and distribute copies within two days after meeting to participants, with two copies to Architect, Owner, participants, and those affected by decisions made.

3.02 PROGRESS MEETINGS

- A. Schedule and administer meetings throughout progress of the Work at maximum monthly intervals.
- B. Make arrangements for meetings, prepare agenda with copies for participants, preside at meetings.
- C. Attendance Required:
1. Contractor.
 2. Owner.
 3. Architect.
 4. Contractor's Superintendent.
 5. Major Subcontractors.
- D. Agenda:
1. Review minutes of previous meetings.
 2. Review of Work progress.
 3. Field observations, problems, and decisions.
 4. Identification of problems that impede, or will impede, planned progress.
 5. Review of submittals schedule and status of submittals.
 6. Maintenance of progress schedule.
 7. Corrective measures to regain projected schedules.
 8. Planned progress during succeeding work period.
 9. Maintenance of quality and work standards.
 10. Effect of proposed changes on progress schedule and coordination.
 11. Other business relating to Work.
- E. Record minutes and distribute copies within two days after meeting to participants, with two copies to Architect, Owner, participants, and those affected by decisions made.

3.03 CONSTRUCTION PROGRESS SCHEDULE

- A. If preliminary schedule requires revision after review, submit revised schedule within 10 days.
- B. Within 20 days after review of preliminary schedule, submit draft of proposed complete schedule for review.
1. Include written certification that major contractors have reviewed and accepted proposed schedule.
- C. Within 10 days after joint review, submit complete schedule.
- D. Submit updated schedule with each Application for Payment.

3.04 COORDINATION DRAWINGS

- A. Provide information required by Project Coordinator for preparation of coordination drawings.
- B. Review drawings prior to submission to Architect.

3.05 SUBMITTALS FOR REVIEW

- A. When the following are specified in individual sections, submit them for review:
1. Product data.
 2. Shop drawings.
 3. Samples for selection.

4. Samples for verification.
- B. Submit to Architect for review for the limited purpose of checking for conformance with information given and the design concept expressed in the contract documents.
- C. Samples will be reviewed only for aesthetic, color, or finish selection.
- D. After review, provide copies and distribute in accordance with SUBMITTAL PROCEDURES article below and for record documents purposes described in Section 01 7800 - Closeout Submittals.

3.06 SUBMITTALS FOR INFORMATION

- A. When the following are specified in individual sections, submit them for information:
 1. Design data.
 2. Certificates.
 3. Test reports.
 4. Inspection reports.
 5. Manufacturer's instructions.
 6. Manufacturer's field reports.
 7. Other types indicated.
- B. Submit for Architect's knowledge as contract administrator or for Owner. No action will be taken.

3.07 SUBMITTALS FOR PROJECT CLOSEOUT

- A. Submit Correction Punch List for Substantial Completion.
- B. Submit Final Correction Punch List for Substantial Completion.
- C. When the following are specified in individual sections, submit them at project closeout:
 1. Project record documents.
 2. Operation and maintenance data.
 3. Warranties.
 4. Bonds.
 5. Other types as indicated.
- D. Submit for Owner's benefit during and after project completion.

3.08 NUMBER OF COPIES OF SUBMITTALS

- A. Electronic Documents: Submit one electronic copy in PDF format; an electronically-marked up file will be returned. Create PDFs at native size and right-side up; illegible files will be rejected.
- B. Documents for Information: Submit two copies.
- C. Samples: Submit the number specified in individual specification sections; one of which will be retained by Architect.
 1. After review, produce duplicates.
 2. Retained samples will not be returned to Contractor unless specifically so stated.

3.09 SUBMITTAL PROCEDURES

- A. Shop Drawing Procedures:
 1. Prepare accurate, drawn-to-scale, original shop drawing documentation by interpreting the Contract Documents and coordinating related Work.
 2. Generic, non-project specific information submitted as shop drawings do not meet the requirements for shop drawings.
- B. Transmit each submittal with a copy of submittal form.
- C. Sequentially number the transmittal form. Revise submittals with original number and a sequential alphabetic suffix.
- D. Identify Project, Contractor, Subcontractor or supplier; pertinent drawing and detail number, and specification section number, as appropriate on each copy.

- E. Apply Contractor's stamp, signed or initialed certifying that review, approval, verification of Products required, field dimensions, adjacent construction Work, and coordination of information is in accordance with the requirements of the Work and Contract Documents.
- F. Deliver submittals to Owner at business address.
- G. Schedule submittals to expedite the Project, and coordinate submission of related items.
- H. For each submittal for review, allow 15 days excluding delivery time to and from the Contractor.
- I. Identify variations from Contract Documents and Product or system limitations that may be detrimental to successful performance of the completed Work.
- J. Provide space for Contractor and Architect review stamps.
- K. When revised for resubmission, identify all changes made since previous submission.
- L. Distribute reviewed submittals as appropriate. Instruct parties to promptly report any inability to comply with requirements.
- M. Submittals not requested will not be recognized or processed.

END OF SECTION

SECTION 01 4000
QUALITY REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. References and standards.
- B. Submittals.
- C. Control of installation.
- D. Tolerances.
- E. Testing and inspection agencies and services.
- F. Control of installation.
- G. Tolerances.
- H. Manufacturers' field services.
- I. Defect Assessment.

1.02 RELATED REQUIREMENTS

- A. Section 01 6000 - Product Requirements: Requirements for material and product quality.

1.03 REFERENCE STANDARDS

- A. ASTM C1021 - Standard Practice for Laboratories Engaged in Testing of Building Sealants; 2008 (Reapproved 2014).
- B. ASTM E329 - Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection; 2014a.
- C. ASTM E543 - Standard Specification for Agencies Performing Nondestructive Testing; 2013.
- D. IAS AC89 - Accreditation Criteria for Testing Laboratories; 2010.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Design Data: Submit for Architect's knowledge as contract administrator for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents, or for Owner's information.
- C. Certificates: When specified in individual specification sections, submit certification by the manufacturer and Contractor or installation/application subcontractor to Architect, in quantities specified for Product Data.
 - 1. Indicate material or product conforms to or exceeds specified requirements. Submit supporting reference data, affidavits, and certifications as appropriate.
 - 2. Certificates may be recent or previous test results on material or product, but must be acceptable to Architect.
- D. Manufacturer's Instructions: When specified in individual specification sections, submit printed instructions for delivery, storage, assembly, installation, start-up, adjusting, and finishing, for the Owner's information. Indicate special procedures, perimeter conditions requiring special attention, and special environmental criteria required for application or installation.

1.05 REFERENCES AND STANDARDS

- A. For products and workmanship specified by reference to a document or documents not included in the Project Manual, also referred to as reference standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.
- B. Conform to reference standard of date of issue current on date of Contract Documents, except where a specific date is established by applicable code.
- C. Obtain copies of standards where required by product specification sections.

- D. Maintain copy at project site during submittals, planning, and progress of the specific work, until Substantial Completion.
- E. Should specified reference standards conflict with Contract Documents, request clarification from Architect before proceeding.
- F. Neither the contractual relationships, duties, or responsibilities of the parties in Contract nor those of Architect shall be altered from the Contract Documents by mention or inference otherwise in any reference document.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 CONTROL OF INSTALLATION

- A. Monitor quality control over suppliers, manufacturers, products, services, site conditions, and workmanship, to produce Work of specified quality.
- B. Comply with manufacturers' instructions, including each step in sequence.
- C. Should manufacturers' instructions conflict with Contract Documents, request clarification from Architect before proceeding.
- D. Comply with specified standards as minimum quality for the Work except where more stringent tolerances, codes, or specified requirements indicate higher standards or more precise workmanship.
- E. Have Work performed by persons qualified to produce required and specified quality.
- F. Verify that field measurements are as indicated on shop drawings or as instructed by the manufacturer.
- G. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, and disfigurement.

3.02 TOLERANCES

- A. Monitor fabrication and installation tolerance control of products to produce acceptable Work. Do not permit tolerances to accumulate.
- B. Comply with manufacturers' tolerances. Should manufacturers' tolerances conflict with Contract Documents, request clarification from Architect before proceeding.
- C. Adjust products to appropriate dimensions; position before securing products in place.

3.03 DEFECT ASSESSMENT

- A. Replace Work or portions of the Work not conforming to specified requirements.
- B. If, in the opinion of Architect, it is not practical to remove and replace the Work, Architect will direct an appropriate remedy or adjust payment.

END OF SECTION

SECTION 01 5000
TEMPORARY FACILITIES AND CONTROLS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Temporary utilities.
- B. Temporary sanitary facilities.
- C. Temporary Controls: Barriers.
- D. Security requirements.
- E. Vehicular access and parking.
- F. Waste removal facilities and services.

1.02 TEMPORARY UTILITIES

- A. Owner will provide the following:
 - 1. Electrical power and metering, consisting of connection to existing facilities.
 - 2. Water supply, consisting of connection to existing facilities.

1.03 TEMPORARY SANITARY FACILITIES

- A. Use of existing facilities located at Garage is permitted.
- B. Maintain daily in clean and sanitary condition.
- C. At end of construction, return facilities to same or better condition as originally found.

1.04 BARRIERS

- A. Provide barriers to prevent unauthorized entry to construction areas, to prevent access to areas that could be hazardous to workers or the public, to allow for owner's use of site and to protect existing facilities and adjacent properties from damage from construction operations and demolition.
- B. Provide barricades and covered walkways required by governing authorities for public rights-of-way and for public access to existing building.
- C. Protect non-owned vehicular traffic, stored materials, site, and structures from damage.

1.05 SECURITY

- A. Provide security and facilities to protect Work, existing facilities, and Owner's operations from unauthorized entry, vandalism, or theft.
- B. Coordinate with Owner's security program.

1.06 VEHICULAR ACCESS AND PARKING

- A. Comply with regulations relating to use of streets and sidewalks, access to emergency facilities, and access for emergency vehicles.
- B. Coordinate access and haul routes with governing authorities and Owner.
- C. Provide and maintain access to fire hydrants, free of obstructions.
- D. Existing parking areas may be used for construction parking.

1.07 WASTE REMOVAL

- A. See Section 01 7419 - Construction Waste Management and Disposal, for additional requirements.
- B. Provide waste removal facilities and services as required to maintain the site in clean and orderly condition.
- C. Provide containers with lids. Remove trash from site periodically.
- D. If materials to be recycled or re-used on the project must be stored on-site, provide suitable non-combustible containers; locate containers holding flammable material outside the structure unless otherwise approved by the authorities having jurisdiction.

- E. Open free-fall chutes are not permitted. Terminate closed chutes into appropriate containers with lids.

1.08 REMOVAL OF UTILITIES, FACILITIES, AND CONTROLS

- A. Remove temporary utilities, equipment, facilities, materials, prior to Date of Substantial Completion inspection.
- B. Clean and repair damage caused by installation or use of temporary work.
- C. Restore existing facilities used during construction to original condition.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION - NOT USED

END OF SECTION

SECTION 01 6000
PRODUCT REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. General product requirements.
- B. Transportation, handling, storage and protection.
- C. Product option requirements.
- D. Substitution limitations and procedures.
- E. Procedures for Owner-supplied products.
- F. Maintenance materials, including extra materials, spare parts, tools, and software.

1.02 RELATED REQUIREMENTS

- A. Document 00 2113 - Instructions to Bidders: Product options and substitution procedures prior to bid date.
- B. Section 01 1000 - Summary: Lists of products to be removed from existing building.
- C. Section 01 4000 - Quality Requirements: Product quality monitoring.
- D. Section 01 7419 - Construction Waste Management and Disposal: Waste disposal requirements potentially affecting packaging and substitutions.

1.03 REFERENCE STANDARDS

- A. 16 CFR 260.13 - Guides for the Use of Environmental Marketing Claims; Federal Trade Commission; Recycled Content; current edition.

1.04 SUBMITTALS

- A. Product Data Submittals: Submit manufacturer's standard published data. Mark each copy to identify applicable products, models, options, and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- B. Shop Drawing Submittals: Prepared specifically for this Project; indicate utility and electrical characteristics, utility connection requirements, and location of utility outlets for service for functional equipment and appliances.

PART 2 PRODUCTS

2.01 EXISTING PRODUCTS

- A. Do not use materials and equipment removed from existing premises unless specifically required or permitted by the Contract Documents.
- B. Existing materials and equipment indicated to be removed, but not to be re-used, relocated, reinstalled, delivered to the Owner, or otherwise indicated as to remain the property of the Owner, become the property of the Contractor; remove from site.
- C. Specific Products to be Reused: The reuse of certain materials and equipment already existing on the project site is required.
 - 1. See Section 01 1000 for list of items required to be salvaged for reuse and relocation.
 - 2. If reuse of other existing materials or equipment is desired, submit substitution request.

2.02 NEW PRODUCTS

- A. Provide new products unless specifically required or permitted by the Contract Documents.
- B. DO NOT USE products having any of the following characteristics:
 - 1. Made using or containing CFC's or HCFC's.

2.03 PRODUCT OPTIONS

- A. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named.

2.04 MAINTENANCE MATERIALS

- A. Furnish extra materials, spare parts, tools, and software of types and in quantities specified in individual specification sections.
- B. Deliver to Project site; obtain receipt prior to final payment.

PART 3 EXECUTION

3.01 SUBSTITUTION PROCEDURES

- A. Instructions to Bidders specifies time restrictions for submitting requests for substitutions during the bidding period and the documents required. Comply with requirements specified in Section 00 2113.
- B. Substitutions will not be considered when a product becomes unavailable through no fault of the Contractor.
- C. Document each request with complete data substantiating compliance of proposed substitution with Contract Documents.
- D. A request for substitution constitutes a representation that the submitter:
 - 1. Has investigated proposed product and determined that it meets or exceeds the quality level of the specified product.
 - 2. Agrees to provide the same warranty for the substitution as for the specified product.
 - 3. Agrees to coordinate installation and make changes to other Work that may be required for the Work to be complete with no additional cost to Owner.
 - 4. Waives claims for additional costs or time extension that may subsequently become apparent.
 - 5. Agrees to reimburse Owner and Architect for review or redesign services associated with re-approval by authorities.
- E. Substitutions will not be considered when they are indicated or implied on shop drawing or product data submittals, without separate written request, or when acceptance will require revision to the Contract Documents.
- F. Substitution Submittal Procedure (after contract award):
 - 1. Submit three copies of request for substitution for consideration. Limit each request to one proposed substitution.
 - 2. Submit shop drawings, product data, and certified test results attesting to the proposed product equivalence. Burden of proof is on proposer.
 - 3. The Architect will notify Contractor in writing of decision to accept or reject request.

3.02 TRANSPORTATION AND HANDLING

- A. Package products for shipment in manner to prevent damage; for equipment, package to avoid loss of factory calibration.
- B. If special precautions are required, attach instructions prominently and legibly on outside of packaging.
- C. Coordinate schedule of product delivery to designated prepared areas in order to minimize site storage time and potential damage to stored materials.
- D. Transport and handle products in accordance with manufacturer's instructions.
- E. Transport materials in covered trucks to prevent contamination of product and littering of surrounding areas.
- F. Promptly inspect shipments to ensure that products comply with requirements, quantities are correct, and products are undamaged.
- G. Provide equipment and personnel to handle products by methods to prevent soiling, disfigurement, or damage, and to minimize handling.
- H. Arrange for the return of packing materials, such as wood pallets, where economically feasible.

3.03 STORAGE AND PROTECTION

- A. Designate receiving/storage areas for incoming products so that they are delivered according to installation schedule and placed convenient to work area in order to minimize waste due to excessive materials handling and misapplication.
- B. Store and protect products in accordance with manufacturers' instructions.
- C. Store with seals and labels intact and legible.
- D. Store sensitive products in weather tight, climate controlled, enclosures in an environment favorable to product.
- E. For exterior storage of fabricated products, place on sloped supports above ground.
- F. Provide bonded off-site storage and protection when site does not permit on-site storage or protection.
- G. Protect products from damage or deterioration due to construction operations, weather, precipitation, humidity, temperature, sunlight and ultraviolet light, dirt, dust, and other contaminants.
- H. Comply with manufacturer's warranty conditions, if any.
- I. Cover products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of products.
- J. Store loose granular materials on solid flat surfaces in a well-drained area. Prevent mixing with foreign matter.
- K. Prevent contact with material that may cause corrosion, discoloration, or staining.
- L. Provide equipment and personnel to store products by methods to prevent soiling, disfigurement, or damage.
- M. Arrange storage of products to permit access for inspection. Periodically inspect to verify products are undamaged and are maintained in acceptable condition.

END OF SECTION

SECTION 01 7000
EXECUTION AND CLOSEOUT REQUIREMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Examination, preparation, and general installation procedures.
- B. Requirements for alterations work, including selective demolition, except removal, disposal, and/or remediation of hazardous materials and toxic substances.
- C. Pre-installation meetings.
- D. Cutting and patching.
- E. Surveying for laying out the work.
- F. Cleaning and protection.
- G. Starting of systems and equipment.
- H. Demonstration and instruction of Owner personnel.
- I. Closeout procedures, including Contractor's Correction Punch List, except payment procedures.
- J. General requirements for maintenance service.

1.02 RELATED REQUIREMENTS

- A. Section 01 1000 - Summary: Limitations on working in existing building; continued occupancy; work sequence; identification of salvaged and relocated materials.
- B. Section 01 4000 - Quality Requirements: Testing and inspection procedures.
- C. Section 01 7419 - Construction Waste Management and Disposal: Additional procedures for trash/waste removal, recycling, salvage, and reuse.
- D. Section 01 7800 - Closeout Submittals: Project record documents, operation and maintenance data, warranties and bonds.

1.03 REFERENCE STANDARDS

- A. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations; 2013.

1.04 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Cutting and Patching: Submit written request in advance of cutting or alteration that affects:
 - 1. Structural integrity of any element of Project.
 - 2. Integrity of weather exposed or moisture resistant element.
 - 3. Efficiency, maintenance, or safety of any operational element.
 - 4. Visual qualities of sight exposed elements.
 - 5. Include in request:
 - a. Identification of Project.
 - b. Location and description of affected work.
 - c. Necessity for cutting or alteration.
 - d. Description of proposed work and products to be used.
 - e. Effect on work of Owner or separate Contractor.
 - f. Written permission of affected separate Contractor.
 - g. Date and time work will be executed.
- C. Project Record Documents: Accurately record actual locations of capped and active utilities.

1.05 QUALIFICATIONS

- A. For field engineering, employ a professional engineer of the discipline required for specific service on Project, licensed in Iowa.

1.06 PROJECT CONDITIONS

- A. Noise Control: Provide methods, means, and facilities to minimize noise produced by construction operations.
 - 1. At All Times: Excessively noisy tools and operations will not be tolerated inside the building at any time of day; excessively noisy includes jackhammers.
 - 2. Outdoors: Limit conduct of especially noisy exterior work to the hours of 8 am to 5 pm.
 - 3. Indoors: Limit conduct of especially noisy interior work to the hours of 6 pm to 7 am.
- B. Pest and Rodent Control: Provide methods, means, and facilities to prevent pests and insects from damaging the work.
- C. Rodent Control: Provide methods, means, and facilities to prevent rodents from accessing or invading premises.
- D. Pollution Control: Provide methods, means, and facilities to prevent contamination of soil, water, and atmosphere from discharge of noxious, toxic substances, and pollutants produced by construction operations. Comply with federal, state, and local regulations.

1.07 COORDINATION

- A. Coordinate scheduling, submittals, and work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements, with provisions for accommodating items installed later.
- B. Notify affected utility companies and comply with their requirements.
- C. Coordinate completion and clean-up of work of separate sections.
- D. After Owner occupancy of premises, coordinate access to site for correction of defective work and work not in accordance with Contract Documents, to minimize disruption of Owner's activities.

PART 2 PRODUCTS

2.01 PATCHING MATERIALS

- A. New Materials: As specified in product sections; match existing products and work for patching and extending work.
- B. Type and Quality of Existing Products: Determine by inspecting and testing products where necessary, referring to existing work as a standard.
- C. Product Substitution: For any proposed change in materials, submit request for substitution described in Section 01 6000 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that existing site conditions and substrate surfaces are acceptable for subsequent work. Start of work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new work being applied or attached.
- C. Examine and verify specific conditions described in individual specification sections.
- D. Take field measurements before confirming product orders or beginning fabrication, to minimize waste due to over-ordering or misfabrication.
- E. Verify that utility services are available, of the correct characteristics, and in the correct locations.
- F. Prior to Cutting: Examine existing conditions prior to commencing work, including elements subject to damage or movement during cutting and patching. After uncovering existing work, assess conditions affecting performance of work. Beginning of cutting or patching means acceptance of existing conditions.

3.02 PREPARATION

- A. Clean substrate surfaces prior to applying next material or substance.
- B. Seal cracks or openings of substrate prior to applying next material or substance.
- C. Apply manufacturer required or recommended substrate primer, sealer, or conditioner prior to applying any new material or substance in contact or bond.

3.03 PREINSTALLATION MEETINGS

- A. When required in individual specification sections, convene a preinstallation meeting at the site prior to commencing work of the section.
- B. Require attendance of parties directly affecting, or affected by, work of the specific section.
- C. Notify Architect four days in advance of meeting date.
- D. Prepare agenda and preside at meeting:
 - 1. Review conditions of examination, preparation and installation procedures.
 - 2. Review coordination with related work.
- E. Record minutes and distribute copies within two days after meeting to participants, with two copies to Architect, Owner, participants, and those affected by decisions made.

3.04 GENERAL INSTALLATION REQUIREMENTS

- A. In addition to compliance with regulatory requirements, conduct construction operations in compliance with NFPA 241, including applicable recommendations in Appendix A.
- B. Install products as specified in individual sections, in accordance with manufacturer's instructions and recommendations, and so as to avoid waste due to necessity for replacement.
- C. Make vertical elements plumb and horizontal elements level, unless otherwise indicated.
- D. Install equipment and fittings plumb and level, neatly aligned with adjacent vertical and horizontal lines, unless otherwise indicated.
- E. Make consistent texture on surfaces, with seamless transitions, unless otherwise indicated.
- F. Make neat transitions between different surfaces, maintaining texture and appearance.

3.05 ALTERATIONS

- A. Maintain weatherproof exterior building enclosure except for interruptions required for replacement or modifications; take care to prevent water and humidity damage.
 - 1. Where openings in exterior enclosure exist, provide construction to make exterior enclosure weatherproof.
 - 2. Insulate existing ducts or pipes that are exposed to outdoor ambient temperatures by alterations work.
- B. Remove existing work as indicated and as required to accomplish new work.
 - 1. Remove items indicated on drawings.
 - 2. Relocate items indicated on drawings.
 - 3. Where new surface finishes are to be applied to existing work, perform removals, patch, and prepare existing surfaces as required to receive new finish; remove existing finish if necessary for successful application of new finish.
 - 4. Where new surface finishes are not specified or indicated, patch holes and damaged surfaces to match adjacent finished surfaces as closely as possible.
- C. Remove demolition debris and abandoned items from alterations areas and dispose of off-site; do not burn or bury.
- D. Comply with all other applicable requirements of this section.

3.06 CUTTING AND PATCHING

- A. Whenever possible, execute the work by methods that avoid cutting or patching.
- B. Perform whatever cutting and patching is necessary to:
 - 1. Complete the work.

2. Fit products together to integrate with other work.
 3. Repair areas adjacent to cuts to required condition.
 4. Repair new work damaged by subsequent work.
 5. Remove and replace defective and non-conforming work.
- C. Patching:
1. Finish patched surfaces to match finish that existed prior to patching. On continuous surfaces, refinish to nearest intersection or natural break. For an assembly, refinish entire unit.
 2. Match color, texture, and appearance.
 3. Repair patched surfaces that are damaged, lifted, discolored, or showing other imperfections due to patching work. If defects are due to condition of substrate, repair substrate prior to repairing finish.

3.07 PROGRESS CLEANING

- A. Maintain areas free of waste materials, debris, and rubbish. Maintain site in a clean and orderly condition.
- B. Collect and remove waste materials, debris, and trash/rubbish from site periodically and dispose off-site; do not burn or bury.

3.08 PROTECTION OF INSTALLED WORK

- A. Protect installed work from damage by construction operations.
- B. Provide temporary and removable protection for installed products. Control activity in immediate work area to prevent damage.
- C. Prohibit traffic or storage upon waterproofed or roofed surfaces. If traffic or activity is necessary, obtain recommendations for protection from waterproofing or roofing material manufacturer.

3.09 FINAL CLEANING

- A. Execute final cleaning prior to Substantial Completion.
- B. Use cleaning materials that are nonhazardous.
- C. Clean debris from roofs, gutters, and downspouts.
- D. Clean site; sweep paved areas, rake clean landscaped surfaces.
- E. Remove waste, surplus materials, trash/rubbish, and construction facilities from the site; dispose of in legal manner; do not burn or bury.

3.10 CLOSEOUT PROCEDURES

- A. Make submittals that are required by governing or other authorities.
 1. Provide copies to Architect and Owner.
- B. Accompany Project Coordinator on preliminary inspection to determine items to be listed for completion or correction in the Contractor's Correction Punch List for Contractor's Notice of Substantial Completion.
- C. Notify Architect when work is considered ready for Architect's Substantial Completion inspection.
- D. Submit written certification containing Contractor's Correction Punch List, that Contract Documents have been reviewed, work has been inspected, and that work is complete in accordance with Contract Documents and ready for Architect's Substantial Completion inspection.
- E. Owner will occupy all of the building as specified in Section 01 1000.
- F. Conduct Substantial Completion inspection and create Final Correction Punch List containing Architect's and Contractor's comprehensive list of items identified to be completed or corrected and submit to Architect.

- G. Correct items of work listed in Final Correction Punch List and comply with requirements for access to Owner-occupied areas.
- H. Accompany Project Coordinator on Contractor's preliminary final inspection.
- I. Notify Architect when work is considered finally complete and ready for Architect's Substantial Completion final inspection.
- J. Complete items of work determined by Architect listed in executed Certificate of Substantial Completion.

3.11 MAINTENANCE

- A. Provide service and maintenance of components indicated in specification sections.
- B. Maintenance Period: As indicated in specification sections or, if not indicated, not less than one year from the Date of Substantial Completion or the length of the specified warranty, whichever is longer.

END OF SECTION

SECTION 01 7419

CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

PART 1 GENERAL

1.01 WASTE MANAGEMENT REQUIREMENTS

- A. Owner requires that this project generate the least amount of trash and waste possible.
- B. Employ processes that ensure the generation of as little waste as possible due to error, poor planning, breakage, mishandling, contamination, or other factors.
- C. Minimize trash/waste disposal in landfills; reuse, salvage, or recycle as much waste as economically feasible.
- D. Required Recycling, Salvage, and Reuse: The following may not be disposed of in landfills or by incineration:
 - 1. Aluminum and plastic beverage containers.
 - 2. Corrugated cardboard.
 - 3. Wood pallets.
 - 4. Clean dimensional wood: May be used as blocking or furring.
 - 5. Metals, including packaging banding, metal studs, sheet metal, structural steel, piping, reinforcing bars, door frames, and other items made of steel, iron, galvanized steel, stainless steel, aluminum, copper, zinc, lead, brass, and bronze.
 - 6. Paint.
- E. Methods of trash/waste disposal that are not acceptable are:
 - 1. Burning on the project site.
 - 2. Burying on the project site.
 - 3. Dumping or burying on other property, public or private.
 - 4. Other illegal dumping or burying.
 - 5. Incineration, either on- or off-site.
- F. Regulatory Requirements: Contractor is responsible for knowing and complying with regulatory requirements, including but not limited to Federal, state and local requirements, pertaining to legal disposal of all construction and demolition waste materials.

1.02 DEFINITIONS

- A. Clean: Untreated and unpainted; not contaminated with oils, solvents, caulk, or the like.
- B. Construction and Demolition Waste: Solid wastes typically including building materials, packaging, trash, debris, and rubble resulting from construction, remodeling, repair and demolition operations.
- C. Hazardous: Exhibiting the characteristics of hazardous substances, i.e., ignitibility, corrosivity, toxicity or reactivity.
- D. Nonhazardous: Exhibiting none of the characteristics of hazardous substances, i.e., ignitibility, corrosivity, toxicity, or reactivity.
- E. Nontoxic: Neither immediately poisonous to humans nor poisonous after a long period of exposure.
- F. Recyclable: The ability of a product or material to be recovered at the end of its life cycle and remanufactured into a new product for reuse by others.
- G. Recycle: To remove a waste material from the project site to another site for remanufacture into a new product for reuse by others.
- H. Recycling: The process of sorting, cleansing, treating and reconstituting solid waste and other discarded materials for the purpose of using the altered form. Recycling does not include burning, incinerating, or thermally destroying waste.
- I. Return: To give back reusable items or unused products to vendors for credit.
- J. Reuse: To reuse a construction waste material in some manner on the project site.

- K. Salvage: To remove a waste material from the project site to another site for resale or reuse by others.
- L. Sediment: Soil and other debris that has been eroded and transported by storm or well production run-off water.
- M. Source Separation: The act of keeping different types of waste materials separate beginning from the first time they become waste.
- N. Toxic: Poisonous to humans either immediately or after a long period of exposure.
- O. Trash: Any product or material unable to be reused, returned, recycled, or salvaged.
- P. Waste: Extra material or material that has reached the end of its useful life in its intended use. Waste includes salvageable, returnable, recyclable, and reusable material.

PART 2 PRODUCTS

2.01 PRODUCT SUBSTITUTIONS

- A. See Section 01 6000 - Product Requirements for substitution submission procedures.
- B. For each proposed product substitution, submit the following information in addition to requirements specified in Section 01 6000:
 - 1. Relative amount of waste produced, compared to specified product.
 - 2. Cost savings on waste disposal, compared to specified product, to be deducted from the Contract Sum.
 - 3. Proposed disposal method for waste product.
 - 4. Markets for recycled waste product.

PART 3 EXECUTION

3.01 WASTE MANAGEMENT PLAN IMPLEMENTATION

- A. Manager: Designate an on-site person or persons responsible for instructing workers on waste disposal.
- B. Instruction: Provide on-site instruction of appropriate separation, handling, and recycling, salvage, reuse, and return methods to be used by all parties at the appropriate stages of the project.
- C. Meetings: Discuss trash/waste management goals and issues at regular job site meetings
- D. Facilities: Provide specific facilities for separation and storage of materials for recycling, salvage, reuse, return, and trash disposal, for use by all contractors and installers.
 - 1. Locate enclosures out of the way of Iowa Department of Transportation traffic.
 - 2. Provide adequate space for pick-up and delivery and convenience to subcontractors.
 - 3. Keep recycling and trash/waste bin areas neat and clean and clearly marked in order to avoid contamination of materials.
- E. Hazardous Wastes: Separate, store, and dispose of hazardous wastes according to applicable regulations.
- F. Recycling: Separate, store, protect, and handle at the site identified recyclable waste products in order to prevent contamination of materials and to maximize recyclability of identified materials. Arrange for timely pickups from the site or deliveries to recycling facility in order to prevent contamination of recyclable materials.
- G. Reuse of Materials On-Site: Set aside, sort, and protect separated products in preparation for reuse.

END OF SECTION

SECTION 01 7800
CLOSEOUT SUBMITTALS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Project Record Documents.
- B. Operation and Maintenance Data.
- C. Warranties and bonds.

1.02 RELATED REQUIREMENTS

- A. Section 01 7000 - Execution and Closeout Requirements: Contract closeout procedures.

1.03 SUBMITTALS

- A. Project Record Documents: Submit documents to Architect with claim for final Application for Payment.
- B. Operation and Maintenance Data:
 - 1. Submit two copies of preliminary draft or proposed formats and outlines of contents before start of Work. Architect will review draft and return one copy with comments.
 - 2. For equipment, or component parts of equipment put into service during construction and operated by Owner, submit completed documents within ten days after acceptance.
 - 3. Submit one copy of completed documents 15 days prior to final inspection. This copy will be reviewed and returned after final inspection, with Architect comments. Revise content of all document sets as required prior to final submission.
 - 4. Submit two sets of revised final documents in final form within 10 days after final inspection.
- C. Warranties and Bonds:
 - 1. Make other submittals within 10 days after Date of Substantial Completion, prior to final Application for Payment.
 - 2. For items of Work for which acceptance is delayed beyond Date of Substantial Completion, submit within 10 days after acceptance, listing the date of acceptance as the beginning of the warranty period.

PART 2 PRODUCTS - NOT USED

PART 3 EXECUTION

3.01 PROJECT RECORD DOCUMENTS

- A. Maintain on site one set of the following record documents; record actual revisions to the Work:
 - 1. Drawings.
 - 2. Specifications.
 - 3. Addenda.
 - 4. Change Orders and other modifications to the Contract.
 - 5. Reviewed shop drawings, product data, and samples.
 - 6. Manufacturer's instruction for assembly, installation, and adjusting.
- B. Ensure entries are complete and accurate, enabling future reference by Owner.
- C. Store record documents separate from documents used for construction.
- D. Record information concurrent with construction progress.
- E. Specifications: Legibly mark and record at each product section description of actual products installed, including the following:
 - 1. Manufacturer's name and product model and number.
 - 2. Product substitutions or alternates utilized.
 - 3. Changes made by Addenda and modifications.
- F. Record Drawings and Shop Drawings: Legibly mark each item to record actual construction including:

1. Field changes of dimension and detail.
2. Details not on original Contract drawings.

3.02 OPERATION AND MAINTENANCE DATA

- A. Source Data: For each product or system, list names, addresses and telephone numbers of Subcontractors and suppliers, including local source of supplies and replacement parts.
- B. Product Data: Mark each sheet to clearly identify specific products and component parts, and data applicable to installation. Delete inapplicable information.
- C. Drawings: Supplement product data to illustrate relations of component parts of equipment and systems, to show control and flow diagrams. Do not use Project Record Documents as maintenance drawings.
- D. Typed Text: As required to supplement product data. Provide logical sequence of instructions for each procedure, incorporating manufacturer's instructions.

3.03 OPERATION AND MAINTENANCE DATA FOR MATERIALS AND FINISHES

- A. For Each Product, Applied Material, and Finish:
 1. Product data, with catalog number, size, composition, and color and texture designations.
 2. Information for re-ordering custom manufactured products.
- B. Instructions for Care and Maintenance: Manufacturer's recommendations for cleaning agents and methods, precautions against detrimental cleaning agents and methods, and recommended schedule for cleaning and maintenance.
- C. Moisture protection and weather-exposed products: Include product data listing applicable reference standards, chemical composition, and details of installation. Provide recommendations for inspections, maintenance, and repair.
- D. Additional information as specified in individual product specification sections.
- E. Where additional instructions are required, beyond the manufacturer's standard printed instructions, have instructions prepared by personnel experienced in the operation and maintenance of the specific products.

3.04 WARRANTIES AND BONDS

- A. Obtain warranties and bonds, executed in duplicate by responsible Subcontractors, suppliers, and manufacturers, within 10 days after completion of the applicable item of work. Except for items put into use with Owner's permission, leave date of beginning of time of warranty until Date of Substantial completion is determined.
- B. Verify that documents are in proper form, contain full information, and are notarized.
- C. Co-execute submittals when required.
- D. Retain warranties and bonds until time specified for submittal.
- E. Include originals of each in operation and maintenance manuals, indexed separately on Table of Contents.

END OF SECTION

**SECTION 02 4100
DEMOLITION**

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Selective demolition of building elements for alteration purposes.

1.02 RELATED REQUIREMENTS

- A. Section 01 1000 - Summary: Limitations on Contractor's use of site and premises.
- B. Section 01 5000 - Temporary Facilities and Controls: Site fences, security, protective barriers, and waste removal.
- C. Section 01 7000 - Execution and Closeout Requirements: Project conditions; protection of bench marks, survey control points, and existing construction to remain; reinstallation of removed products; temporary bracing and shoring.

PART 3 EXECUTION

2.01 SCOPE

- A. Remove other items indicated, for recycling and disposal.

2.02 GENERAL PROCEDURES AND PROJECT CONDITIONS

- A. Comply with other requirements specified in Section 01 7000.
- B. Comply with applicable codes and regulations for demolition operations and safety of adjacent structures and the public.
 - 1. Obtain required permits.
 - 2. Take precautions to prevent catastrophic or uncontrolled collapse of structures to be removed; do not allow worker or public access within range of potential collapse of unstable structures.
 - 3. Provide, erect, and maintain temporary barriers and security devices.
 - 4. Conduct operations to minimize effects on and interference with adjacent structures and occupants.
 - 5. Do not close or obstruct roadways or sidewalks without permit.
 - 6. Conduct operations to minimize obstruction of public and private entrances and exits; do not obstruct required exits at any time; protect persons using entrances and exits from removal operations.
 - 7. Obtain written permission from owners of adjacent properties when demolition equipment will traverse, infringe upon or limit access to their property.
- C. Do not begin removal until receipt of notification to proceed from Owner.
- D. Protect existing structures and other elements that are not to be removed.
- E. If hazardous materials are discovered during removal operations, stop work and notify Architect and Owner; hazardous materials include regulated asbestos containing materials, lead, PCB's, and mercury.
- F. Perform demolition in a manner that maximizes salvage and recycling of materials.
 - 1. Dismantle existing construction and separate materials.
 - 2. Set aside reusable, recyclable, and salvageable materials; store and deliver to collection point or point of reuse.

2.03 EXISTING UTILITIES

- A. Coordinate work with utility companies; notify before starting work and comply with their requirements; obtain required permits.
- B. Protect existing utilities to remain from damage.
- C. Do not disrupt public utilities without permit from authority having jurisdiction.
- D. Do not close, shut off, or disrupt existing life safety systems that are in use without at least 7 days prior written notification to Owner.

- E. Do not close, shut off, or disrupt existing utility branches or take-offs that are in use without at least 3 days prior written notification to Owner.

2.04 SELECTIVE DEMOLITION FOR ALTERATIONS

- A. Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
 - 1. Verify that construction and utility arrangements are as shown.
 - 2. Report discrepancies to Architect before disturbing existing installation.
 - 3. Beginning of demolition work constitutes acceptance of existing conditions that would be apparent upon examination prior to starting demolition.
- B. Remove existing work as indicated and as required to accomplish new work.
 - 1. Remove items indicated on drawings.
- C. Services (Including but not limited to Electrical): Remove existing systems and equipment as indicated.
 - 1. Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components.
 - 2. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
 - 3. Verify that abandoned services serve only abandoned facilities before removal.
 - 4. Remove abandoned pipe, ducts, conduits, and equipment; remove back to source of supply where possible, otherwise cap stub and tag with identification.
- D. Protect existing work to remain.
 - 1. Prevent movement of structure; provide shoring and bracing if necessary.
 - 2. Perform cutting to accomplish removals neatly and as specified for cutting new work.
 - 3. Repair adjacent construction and finishes damaged during removal work.
 - 4. Patch as specified for patching new work.

2.05 DEBRIS AND WASTE REMOVAL

- A. Remove debris, junk, and trash from site.
- B. Leave site in clean condition, ready for subsequent work.
- C. Clean up spillage and wind-blown debris from public and private lands.

END OF SECTION

SECTION 09 9123
INTERIOR PAINTING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Surface preparation.
- B. Field application of paints.
- C. Scope: Finish interior surfaces exposed to view, unless fully factory-finished at the ceiling ONLY in the rooms indicated on the drawings.
- D. Do Not Paint or Finish the Following Items:
 - 1. Items factory-finished unless otherwise indicated; materials and products having factory-applied primers are not considered factory finished.
 - 2. Items indicated to receive other finishes.
 - 3. Items indicated to remain unfinished.
 - 4. Fire rating labels, equipment serial number and capacity labels, bar code labels, and operating parts of equipment.
 - 5. Floors, unless specifically indicated.
 - 6. Glass.
 - 7. Concealed pipes, ducts, and conduits.

1.02 REFERENCE STANDARDS

- A. ASTM D4442 - Standard Test Methods for Direct Moisture Content Measurement of Wood and Wood-Base Materials; 2007.
- B. MPI (APSM) - Master Painters Institute Architectural Painting Specification Manual; current edition, www.paintinfo.com.

1.03 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products to site in sealed and labeled containers; inspect to verify acceptability.
- B. Container Label: Include manufacturer's name, type of paint, brand name, lot number, brand code, coverage, surface preparation, drying time, cleanup requirements, color designation, and instructions for mixing and reducing.
- C. Paint Materials: Store at minimum ambient temperature of 45 degrees F and a maximum of 90 degrees F, in ventilated area, and as required by manufacturer's instructions.

1.04 FIELD CONDITIONS

- A. Do not apply materials when surface and ambient temperatures are outside the temperature ranges required by the paint product manufacturer.
- B. Follow manufacturer's recommended procedures for producing best results, including testing of substrates, moisture in substrates, and humidity and temperature limitations.
- C. Provide lighting level of 80 ft candles measured mid-height at substrate surface.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Provide paints and finishes used in any individual system from the same manufacturer; no exceptions.
- B. Paints:
 - 1. Behr Process Corporation: www.behr.com.
 - 2. Benjamin Moore & Co: www.benjaminmoore.com.
 - 3. Diamond Vogel Paints: www.diamondvogel.com.
 - 4. Sherwin-Williams Company: www.sherwin-williams.com.
 - 5. Valspar Corporation: www.valsparpaint.com.
- C. Primer Sealers: Same manufacturer as top coats.

D. Substitutions: See Section 01 6000 - Product Requirements.

2.02 PAINTS AND FINISHES - GENERAL

- A. Paints and Finishes: Ready mixed, unless intended to be a field-catalyzed paint.
1. Provide paints and finishes of a soft paste consistency, capable of being readily and uniformly dispersed to a homogeneous coating, with good flow and brushing properties, and capable of drying or curing free of streaks or sags.
 2. Supply each paint material in quantity required to complete entire project's work from a single production run.
 3. Do not reduce, thin, or dilute paint or finishes or add materials unless such procedure is specifically described in manufacturer's product instructions.

2.03 PAINT SYSTEMS - INTERIOR

- A. Interior Surfaces to be Painted, Unless Otherwise Indicated: Including gypsum board, wood, and plaster.
1. Two top coats and one coat primer.
 2. Top Coat(s): High Performance Architectural Interior Latex; color and sheen to match existing.
 3. Primer: As recommended by top coat manufacturer for specific substrate.

2.04 ACCESSORY MATERIALS

- A. Accessory Materials: Provide primers, sealers, cleaning agents, cleaning cloths, sanding materials, and clean-up materials as required for final completion of painted surfaces.
- B. Patching Material: Latex filler.
- C. Fastener Head Cover Material: Latex filler.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Do not begin application of paints and finishes until substrates have been properly prepared.
- B. Verify that surfaces are ready to receive work as instructed by the product manufacturer.
- C. Examine surfaces scheduled to be finished prior to commencement of work. Report any condition that may potentially effect proper application.
- D. Test shop-applied primer for compatibility with subsequent cover materials.
- E. Measure moisture content of surfaces using an electronic moisture meter. Do not apply finishes unless moisture content of surfaces are below the following maximums:
1. Gypsum Wallboard: 12 percent.
 2. Plaster and Stucco: 12 percent.
 3. Interior Wood: 15 percent, measured in accordance with ASTM D4442.

3.02 PREPARATION

- A. Clean surfaces thoroughly and correct defects prior to application.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- C. Remove or mask surface appurtenances, including electrical plates, hardware, light fixture trim, escutcheons, and fittings, prior to preparing surfaces or finishing.
- D. Seal surfaces that might cause bleed through or staining of topcoat.
- E. Gypsum Board: Fill minor defects with filler compound. Spot prime defects after repair.
- F. Plaster: Fill hairline cracks, small holes, and imperfections with latex patching plaster. Make smooth and flush with adjacent surfaces. Wash and neutralize high alkali surfaces.
- G. Wood Surfaces to Receive Opaque Finish: Wipe off dust and grit prior to priming. Seal knots, pitch streaks, and sappy sections with sealer. Fill nail holes and cracks after primer has dried; sand between coats. Back prime concealed surfaces before installation.

3.03 APPLICATION

- A. Remove unfinished louvers, grilles, covers, and access panels on mechanical and electrical components.
- B. Apply products in accordance with manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual".
- C. Do not apply finishes to surfaces that are not dry. Allow applied coats to dry before next coat is applied.
- D. Apply each coat to uniform appearance in thicknesses specified by manufacturer.
- E. Sand wood and metal surfaces lightly between coats to achieve required finish.
- F. Vacuum clean surfaces of loose particles. Use tack cloth to remove dust and particles just prior to applying next coat.
- G. Reinstall electrical cover plates, hardware, light fixture trim, escutcheons, and fittings removed prior to finishing.

3.04 CLEANING

- A. Collect waste material that could constitute a fire hazard, place in closed metal containers, and remove daily from site.

3.05 PROTECTION

- A. Protect finishes until completion of project.
- B. Touch-up damaged finishes after Substantial Completion.

END OF SECTION

SECTION 26 5100
INTERIOR LIGHTING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Interior luminaires.
- B. Ballasts and drivers.
- C. Lamps.
- D. Luminaire accessories.

1.02 REFERENCE STANDARDS

- A. IES LM-79 - Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products; Illuminating Engineering Society; 2008.
- B. IES LM-80 - Approved Method: Measuring Luminous Flux and Color Maintenance of LED Packages, Arrays, and Modules; Illuminating Engineering Society; 2015.
- C. NECA 1 - Standard for Good Workmanship in Electrical Construction; National Electrical Contractors Association; 2010.
- D. NECA/IESNA 500 - Standard for Installing Indoor Commercial Lighting Systems; National Electrical Contractors Association; 2006.
- E. NECA/IESNA 502 - Standard for Installing Industrial Lighting Systems; National Electrical Contractors Association; 2006.
- F. NFPA 70 - National Electrical Code; National Fire Protection Association; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- G. UL 1598 - Luminaires; Current Edition, Including All Revisions.
- H. UL 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products; Current Edition, Including All Revisions.

1.03 SUBMITTALS

- A. See Section 01 3000 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets including detailed information on luminaire construction, dimensions, ratings, finishes, mounting requirements, listings, service conditions, photometric performance, installed accessories, and ceiling compatibility; include model number nomenclature clearly marked with all proposed features.
 - 1. LED Luminaires:
 - 2. Ballasts: Include wiring diagrams and list of compatible lamp configurations.
 - 3. Lamps: Include rated life, color temperature, color rendering index (CRI), and initial and mean lumen output.

1.04 QUALITY ASSURANCE

- A. Conform to requirements of NFPA 70.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

1.05 DELIVERY, STORAGE, AND PROTECTION

- A. Receive, handle, and store products according to NECA/IESNA 500 (commercial lighting), NECA/IESNA 502 (industrial lighting), and manufacturer's written instructions.
- B. Keep products in original manufacturer's packaging and protect from damage until ready for installation.

1.06 WARRANTY

- A. See Section 01 7800 - Closeout Submittals, for additional warranty requirements.
- B. Provide five year manufacturer warranty for all LED luminaires, including drivers.

PART 2 PRODUCTS

2.01 LUMINAIRES

- A. Manufacturers:
 - 1. Acuity Brands, Inc; Lithonia Lighting: www.acuitybrands.com.
 - 2. Cooper Lighting, a division of Cooper Industries: www.cooperindustries.com.
 - 3. Hubbell Lighting, Inc: www.hubbellighting.com.
 - 4. Lutron Electronics Company, Inc; www.lutron.com.
 - 5. Substitutions: See Section 01 6000 - Product Requirements.
- B. Provide products that comply with requirements of NFPA 70.
- C. Provide products that are listed and labeled as complying with UL 1598, where applicable.
- D. Provide products listed, classified, and labeled as suitable for the purpose intended.
- E. Unless otherwise indicated, provide complete luminaires including lamp(s) and all sockets, ballasts, reflectors, lenses, housings and other components required to position, energize and protect the lamp and distribute the light.
- F. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, hardware, supports, trims, accessories, etc. as necessary for a complete operating system.
- G. Provide products suitable to withstand normal handling, installation, and service without any damage, distortion, corrosion, fading, discoloring, etc.
- H. LED Luminaires:
 - 1. Components: UL 8750 recognized or listed as applicable.
 - 2. Tested in accordance with IES LM-79 and IES LM-80.
 - 3. LED Estimated Useful Life: Minimum of 50,000 hours at 70 percent lumen maintenance, calculated based on IES LM-80 test data.
 - 4. To match the appearance of existing fixtures to remain in the project.
 - a. Lithonia Lighting - Square- Basket Wraparound SB, 4 ft length w/2 lamps
 - b. Substitutions: See Section 01 6000 - Product Requirements.

2.02 BALLASTS AND DRIVERS

- A. Manufacturers:
 - 1. General Electric Company/GE Lighting: www.gelighting.com.
 - 2. Lutron Electronics Company, Inc; www.lutron.com.
 - 3. Osram Sylvania: www.sylvania.com.
 - 4. Philips Lighting Electronics/Advance: www.advance.philips.com.
 - 5. Substitutions: See Section 01 6000 - Product Requirements.
 - 6. Manufacturer Limitations: Where possible, for each type of luminaire provide ballasts produced by a single manufacturer.
- B. Ballasts - General Requirements:
 - 1. Provide ballasts containing no polychlorinated biphenyls (PCBs).
 - 2. Minimum Efficiency/Efficacy: Provide ballasts complying with all current applicable federal and state ballast efficiency/efficacy standards.

2.03 LAMPS

- A. Manufacturers:
 - 1. General Electric Company/GE Lighting: www.gelighting.com.
 - 2. Osram Sylvania: www.sylvania.com.
 - 3. Philips Lighting Company: www.lighting.philips.com.
 - 4. ESPEN Technology: www.espentech.com.

- a. Direct Replacement of Fluorescent Commercial Grade LED T8 Lamp
 - 5. Substitutions: See Section 01 6000 - Product Requirements.
 - 6. Manufacturer Limitations: Where possible, provide lamps produced by a single manufacturer.
- B. Lamps - General Requirements:
- 1. Unless explicitly excluded, provide new, compatible, operable lamps in each luminaire.
 - 2. Verify compatibility of specified lamps with luminaires to be installed. Where lamps are not specified, provide lamps per luminaire manufacturer's recommendations.
 - 3. Minimum Efficiency: Provide lamps complying with all current applicable federal and state lamp efficiency standards.
 - 4. Color Temperature Consistency: Unless otherwise indicated, for each type of lamp furnish products which are consistent in perceived color temperature. Replace lamps that are determined by the Architect to be inconsistent in perceived color temperature.
- C. Linear LED Lamps: Wattage and bulb type as indicated, with base type as required for luminaire.
- 1. Manufacturer: ESPEN Technology; Retro Flex HE - LED T8 Lamp, Simplicity: www.espentech.com
 - 2. Direct Replacement of Fluorescent Commercial Grade T8 Linear LED Lamps:
 - a. L48T8/840/12G-EB
 - b. Correlated Color Temperature (CCT): 4000 K unless otherwise indicated.
 - 1) Color Rendering Index (CRI): Not less than 80.
 - c. Average Rated Life: Not less than 50,000 hours for an operating cycle of three hours per start.
- D. LED - A Shape Replacement bulb for incandescent fixture.
- E. Manufacturer: Philips; LED A Shape - 046677424893;
- 1. 10.5W (60W - equivalent)
 - 2. Bright White, Dimmable
 - 3. Medium Screw (E26)

2.04 ACCESSORIES

- A. Diffusers - to fit on existing fixtures:
- 1. Manufacturers: Louvers International, 851 N. Church Ct., Elmhurst, IL 60126, www.louversintl.com.
 - a. Custom Wrap-a-round lens.
 - b. PREMIER LENS - DUAL WHITE, FROSTGLAZE LI 21.
 - 2. Substitutions: See Section 01 6000 - Product Requirements.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as shown on the drawings.
- B. Verify that outlet boxes are installed in proper locations and at proper mounting heights and are properly sized to accommodate conductors in accordance with NFPA 70.
- C. Verify that suitable support frames are installed where required.
- D. Verify that branch circuit wiring installation is completed, tested, and ready for connection to luminaires.
- E. Verify that conditions are satisfactory for installation prior to starting work.

3.02 INSTALLATION

- A. Install products according to manufacturer's instructions.
- B. Install luminaires securely, in a neat and workmanlike manner, as specified in NECA 1 (general workmanship), NECA 500 (commercial lighting), and NECA 502 (industrial lighting).
- C. Install luminaires plumb and square and aligned with building lines and with adjacent luminaires.

- D. Install accessories furnished with each luminaire.
- E. Bond products and metal accessories to branch circuit equipment grounding conductor.
- F. Install lamps in each luminaire.

3.03 FIELD QUALITY CONTROL

- A. See Section 01 4000 - Quality Requirements, for additional requirements.
- B. Inspect each product for damage and defects.
- C. Operate each luminaire after installation and connection to verify proper operation.
- D. Correct wiring deficiencies and repair or replace damaged or defective products. Repair or replace excessively noisy ballasts as determined by Architect.


3.04 CLEANING

- A. Clean surfaces according to NECA 500 (commercial lighting), NECA 502 (industrial lighting), and manufacturer's instructions to remove dirt, fingerprints, paint, or other foreign material and restore finishes to match original factory finish.

END OF SECTION

Photos of existing conditions




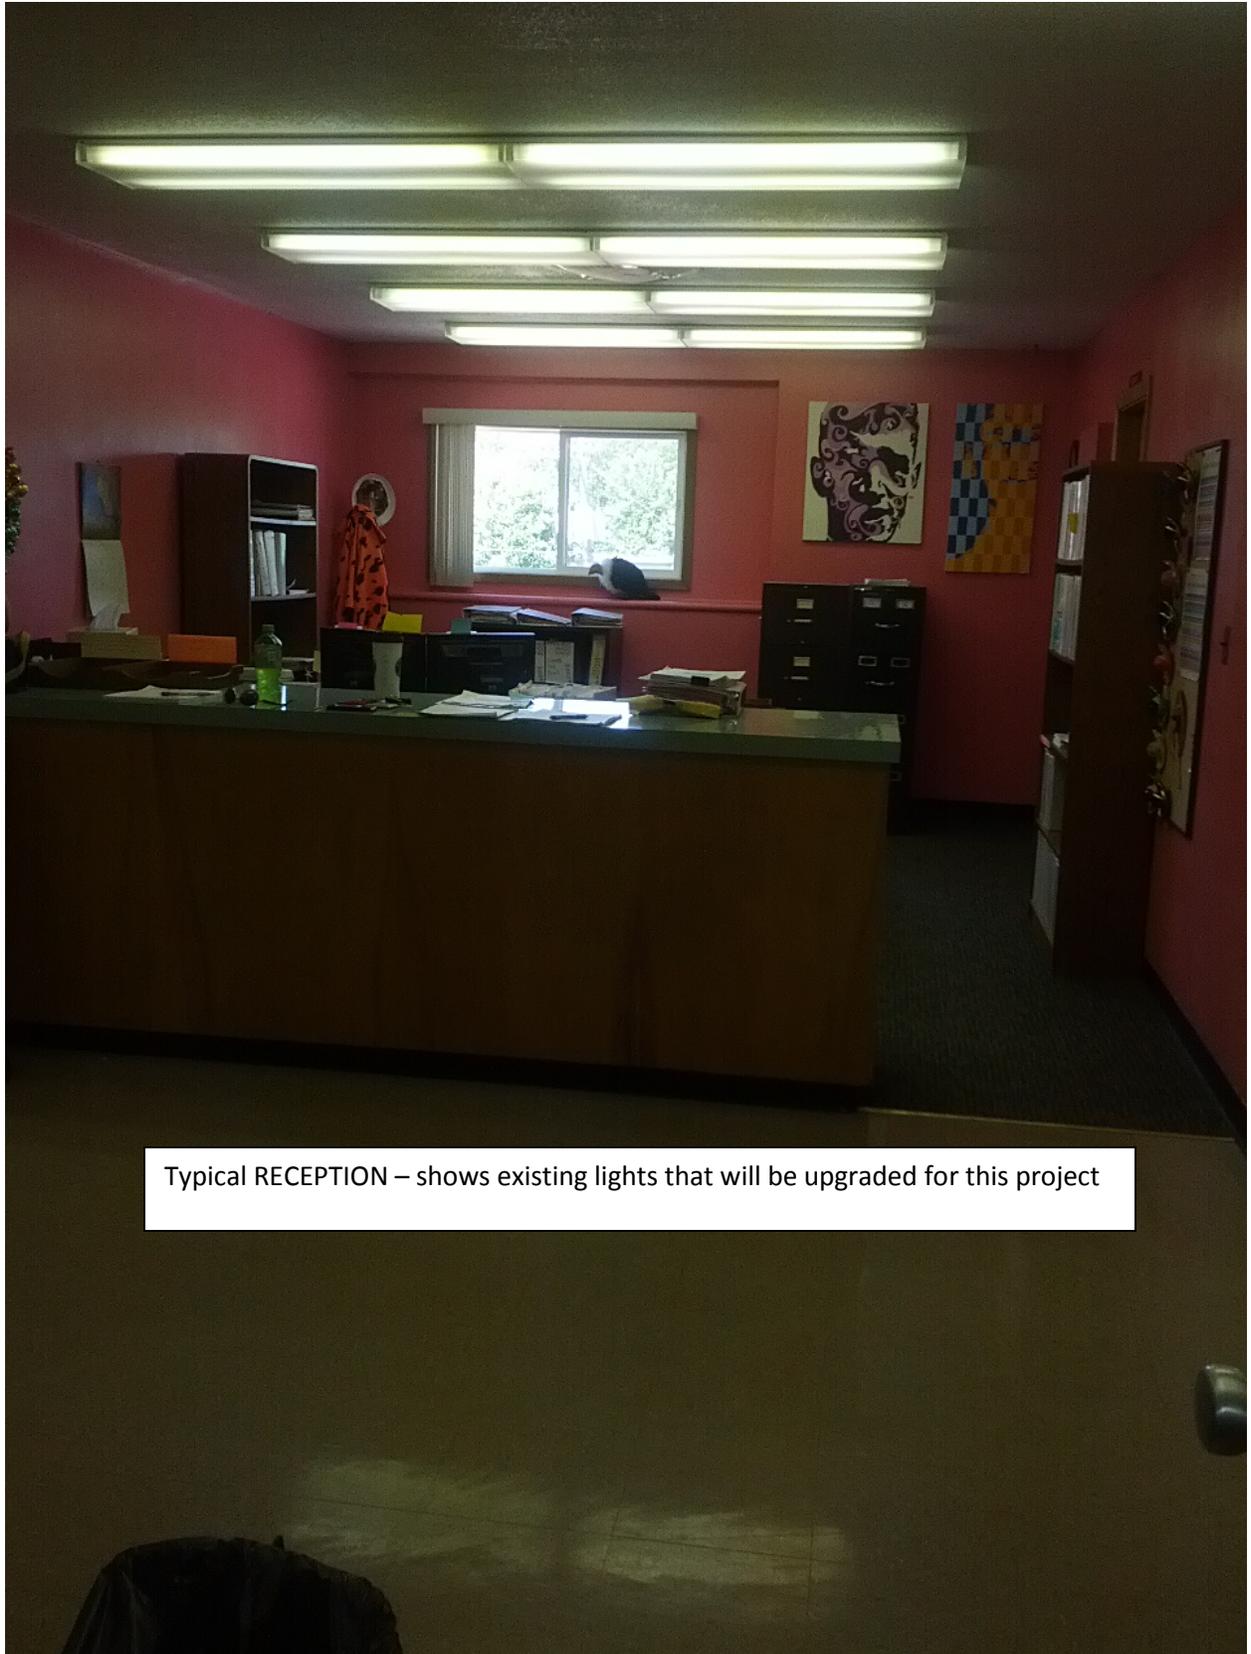


Typical RECEPTION – shows existing lights that will be upgraded for this project



Typical OFFICE – shows existing lights that will be upgraded for this project

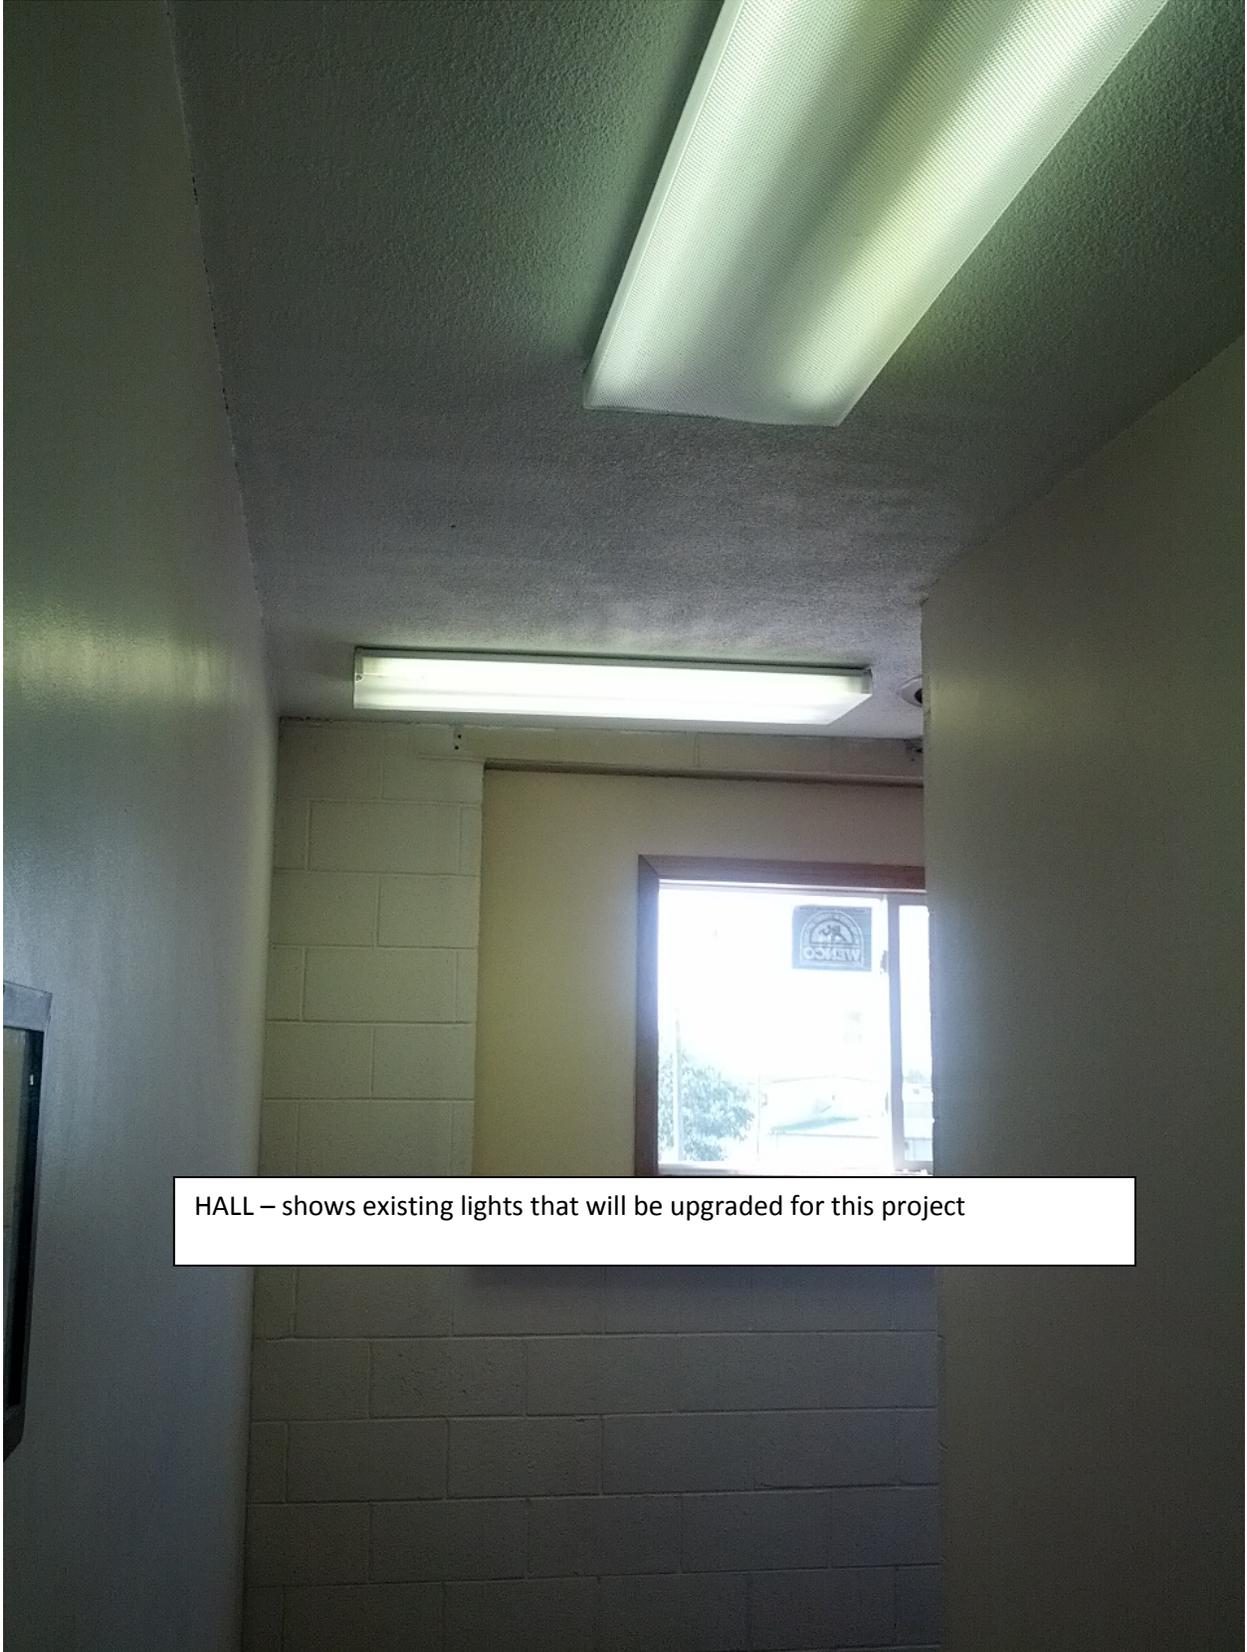

HALL – shows existing lights that will be upgraded for this project

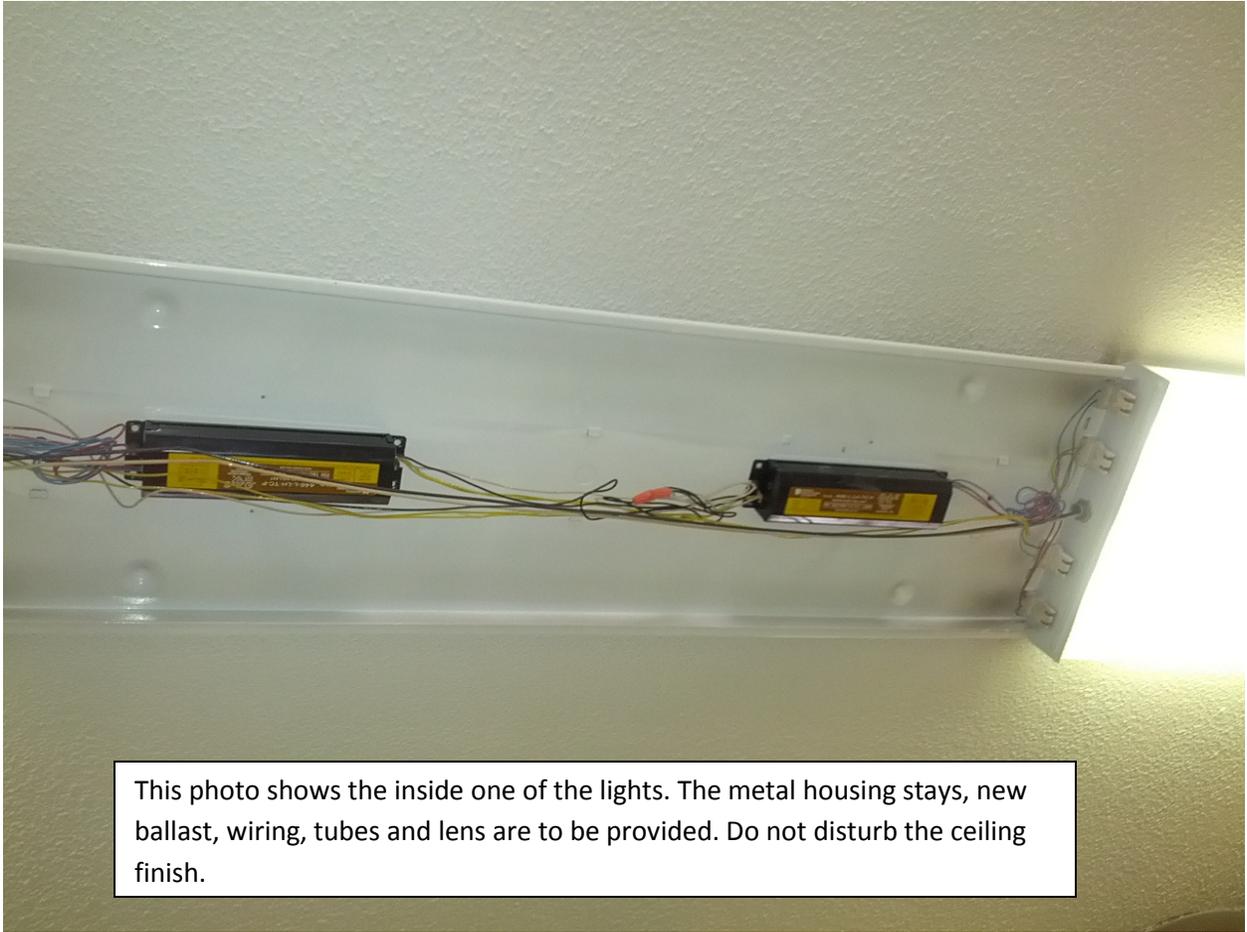

This photo shows the inside one of the lights. The metal housing stays, new ballast, wiring, tubes and lens are to be provided. Do not disturb the ceiling finish.



BREAK AREA – this light stays and bulb is changed to LED.



FRONT STORAGE ROOM – Contractor to remove these old style lights, repair ceiling as necessary, paint ceiling and install new lights per documents.



Bidders Request for Alternatives or Exceptions (BRAE)

Letting Date: 4/29/2016

Proposal No.: 16424

BRAE form due on or before: 4/22/2016

Item: _____

Spec. No.: _____

Request: _____

Bidder Proposes to furnish in lieu of above: _____

NOTE: The determination of acceptance of this BRAE request is only valid for the bid for which it was submitted. BRAE approvals received for this bid do not determine or set a precedent for what is acceptable in any other bid posted by the State of Iowa.

Email/Fax to:

Iowa Department of Transportation
Purchasing Section
Attention: _____ (Agent to fill out)
Email: _____ (Agent to fill out)

Fax No.: 515-239-1538

Submitted By _____

Company _____

Address _____

City _____ State _____ Zip _____

Phone No. _____

Fax No. _____

=====

DOT USE ONLY

Approved _____

Disapproved _____

Reason _____

Signature: _____

Date: _____