


Signs


SI

Signs


NO.	DATE	TITLE
SI-101	04-19-16	Locations - Type 'A' Signs
SI-102	04-19-16	Locations - Type 'B' Signs
SI-111	04-19-16	Support Structures - Wood Posts
SI-112	04-19-16	Footings For Steel Breakaway Posts
SI-113	10-15-19	Support Structures - Steel Breakaway Posts
SI-114	04-19-16	Support Structures - Steel Breakaway Posts Rectangular Tube
SI-119	10-17-17	Support Structures - Mounting Brackets
SI-121	10-16-18	Fabrication - Sign Legend Components
SI-123	10-20-20	Fabrication - Type 'B' Signs
SI-131	10-18-16	Installation - Type 'A' Signs
SI-132	04-17-18	Installation - Type 'B' Signs
SI-133	10-17-17	Installation - Type "A" Sign Shim
SI-171	04-18-17	Reference Location Sign Posts
SI-172	04-19-16	Delineators
SI-173	04-19-16	Object Markers
SI-174	04-21-20	Emergency Management Ramp Signing
SI-175	04-19-16	Chevrons
SI-181	10-18-16	Permanent Road Closure - Rural
SI-182	04-19-16	Permanent Road Closure - Urban
SI-211	10-18-22	Object Marker and Delineator Placement with Guardrail
SI-241	04-20-21	Sign Placement Approaching a Railroad Crossing
SI-881	04-16-19	Special Signs for Workzones
SI-882	10-18-16	Special Signs for Restricted Width Traffic Control Zones

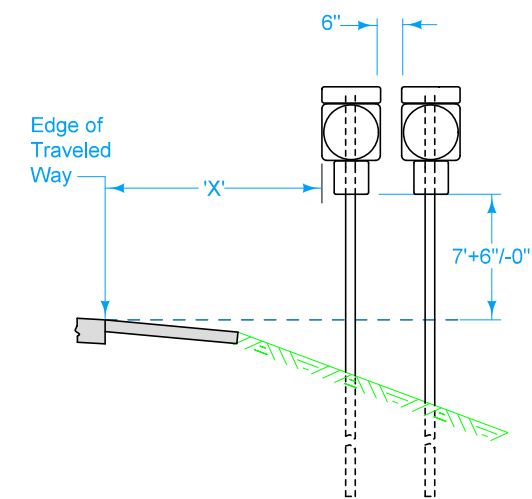

FRONT VIEW
ROUTE DIRECTION MARKER

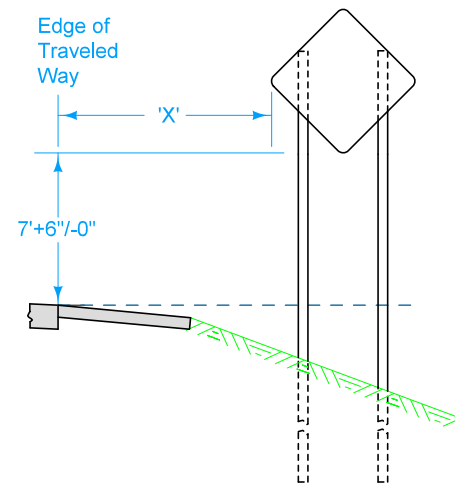


FRONT VIEW
SIGN

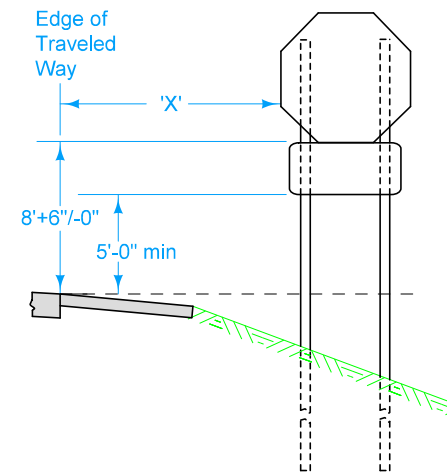

FRONT VIEW
SIGN WITH
ADVISORY PLATE

TYPE 1 INSTALLATION

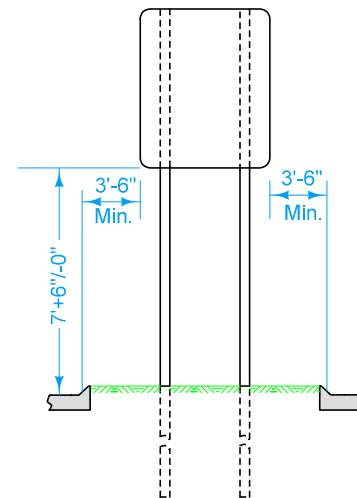

FRONT VIEW
SIGN LOCATION

Type 3 Installation

Type 3 installation is intended to show the requirements for a Type 'A' sign when installed in an island or median (where traffic passes on both sides of the sign) as well as for locations where the Type 'A' sign is installed adjacent to a curbed roadway (sign may be located on either side of a roadway as specified in project plans).

Final sign location will be at the discretion of the Engineer.

Use the Type 1 installation in any case except where:



- (A) Specified otherwise in the plans.
- (B) Directed otherwise by the Engineer.
- (C) A Type 3 installation is required due to location in an island or gore area.


Possible Contract Items:

- Remove and Reinstall Sign as per plan
- Wood Posts for Type A or B signs, 4in x 6in
- Perforated Square Steel tube Post (Anchor Series)
- Type A Signs, Sheet Aluminum
- Install Type A Sign



Possible Tabulations:

- 190-51
- 190-61
- 190-62
- 190-66


 IOWA DOT	REVISION	
	1	04-19-16
	SI-101	
	SHEET 1 of 1	
REVISIONS: Changed Lane Edge Line' to 'Edge of Traveled Way'. Replaced 'Y' with numerical value including tolerance. Removed advisory sign from middle view.		
		
APPROVED BY DESIGN METHODS ENGINEER		
<div>LOCATIONS- TYPE 'A' SIGNS</div>		

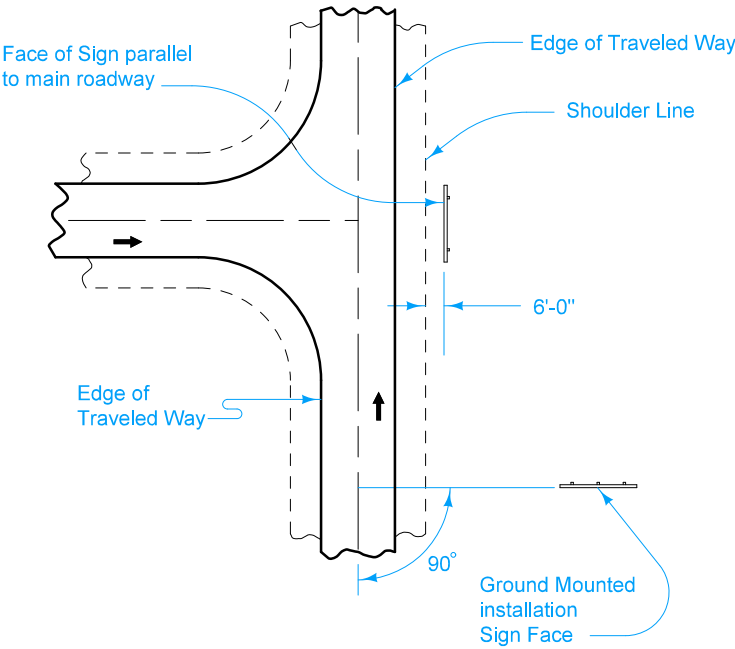

SIGN ORIENTATION PLAN

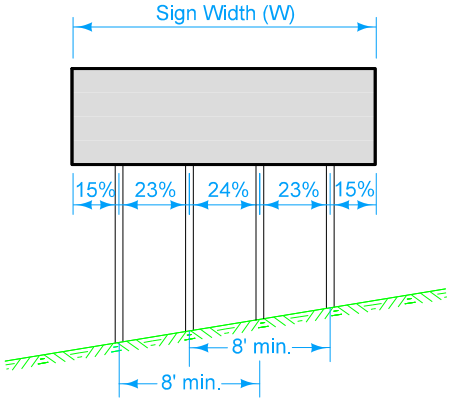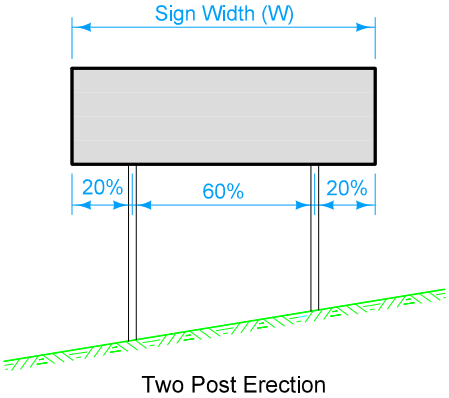

Four Post Erection
POST POSITION DETAIL

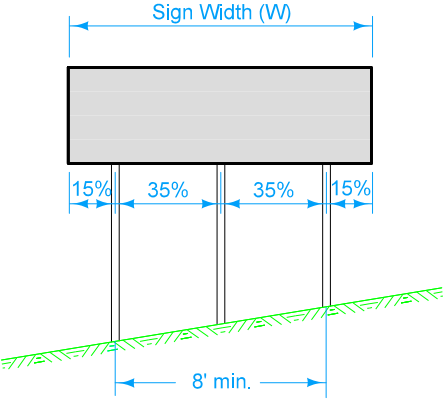

Three Post Erection

Modification of plan requirements will be permitted only as physical conditions require and are subject to the following limitations:

Provide breakaway sign posts that are a minimum length of 7'-4" plus the height of the sign, unless noted otherwise in the tabulations.

Obtain the Engineer's approval for spacing between signs less than 800 feet.



Set all signs level.


Do not modify sign location without approval of the Engineer.

- Possible Contract Items:
- Install Type B Sign
 - Perforated Square Steel Tube Posts
 - Perforated Square Steel Tube Post Anchor (series)
 - Remove and Reinstall Signs as Per Plan
 - Type B Signs
 - Wood Posts for Type A or B Signs, 4 in. x 6 in.
 - Steel Breakaway Sign Post for Type A or B Signs
 - Concrete Footing for Breakaway Sign Post


Possible Tabulations:

- 190-50
- 190-61

 IOWA DOT	REVISION	
	2	04-19-16
	SI-102	
	SHEET 1 of 2	
STANDARD ROAD PLAN		
REVISIONS:	Changed 'Lane Edge Line' to 'Edge of Traveled Way', modified notes and added Possible Contract Items and Tabs. Added FOUR POST DETAIL.	
		
APPROVED BY DESIGN METHODS ENGINEER		
LOCATIONS - TYPE 'B' SIGNS		

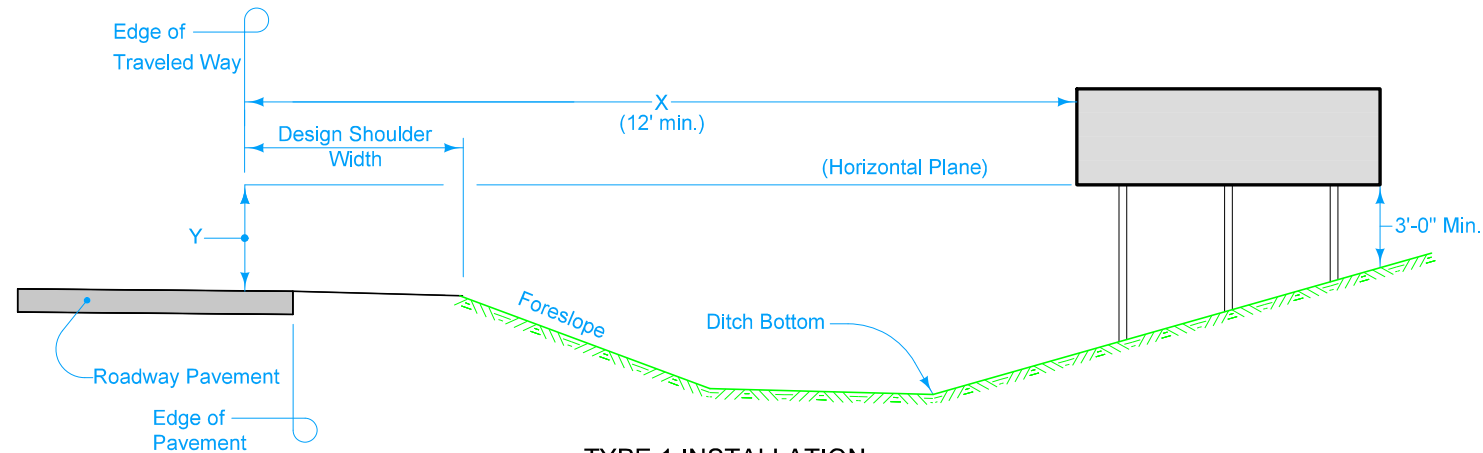


TYPE 1 INSTALLATION
(OFFSET)

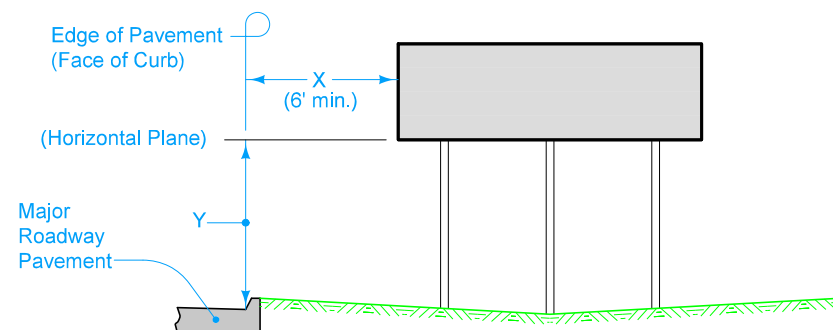


TYPE 2 INSTALLATION
(CURBED SECTION)

Details indicated are for an installation adjacent to a curbed roadway. The sign may be located on either side of the roadway, or in a gore area where curbed roadways pass on both sides, such as an urban freeway exit ramp. When located in a gore area, install where the width between curbs is no less than 12 feet plus sign width.

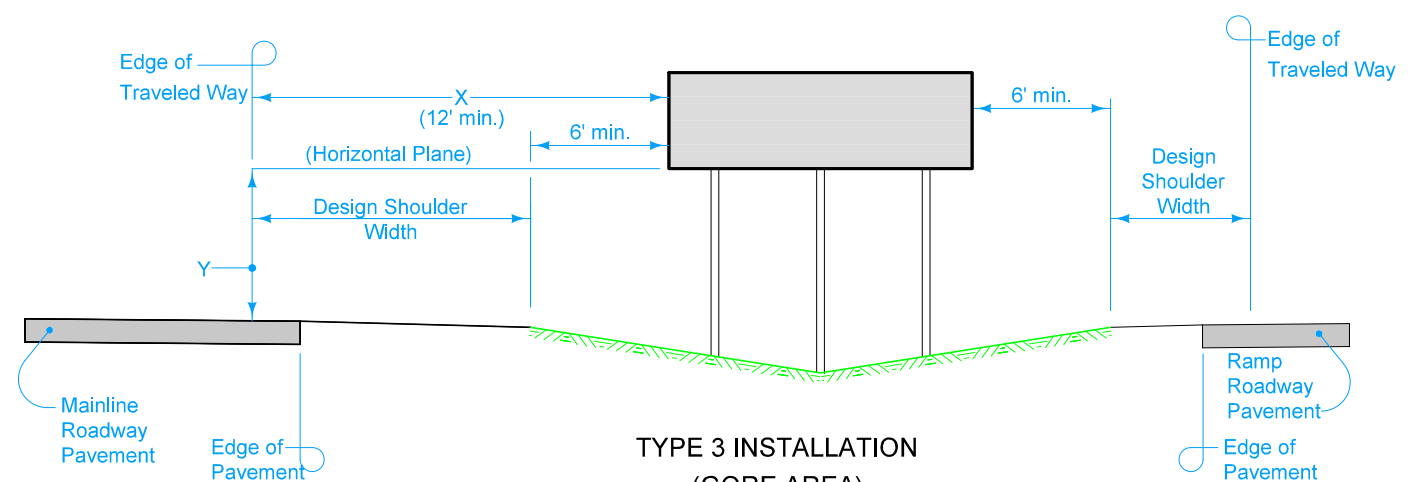



TYPE 3 INSTALLATION
(GORE AREA)

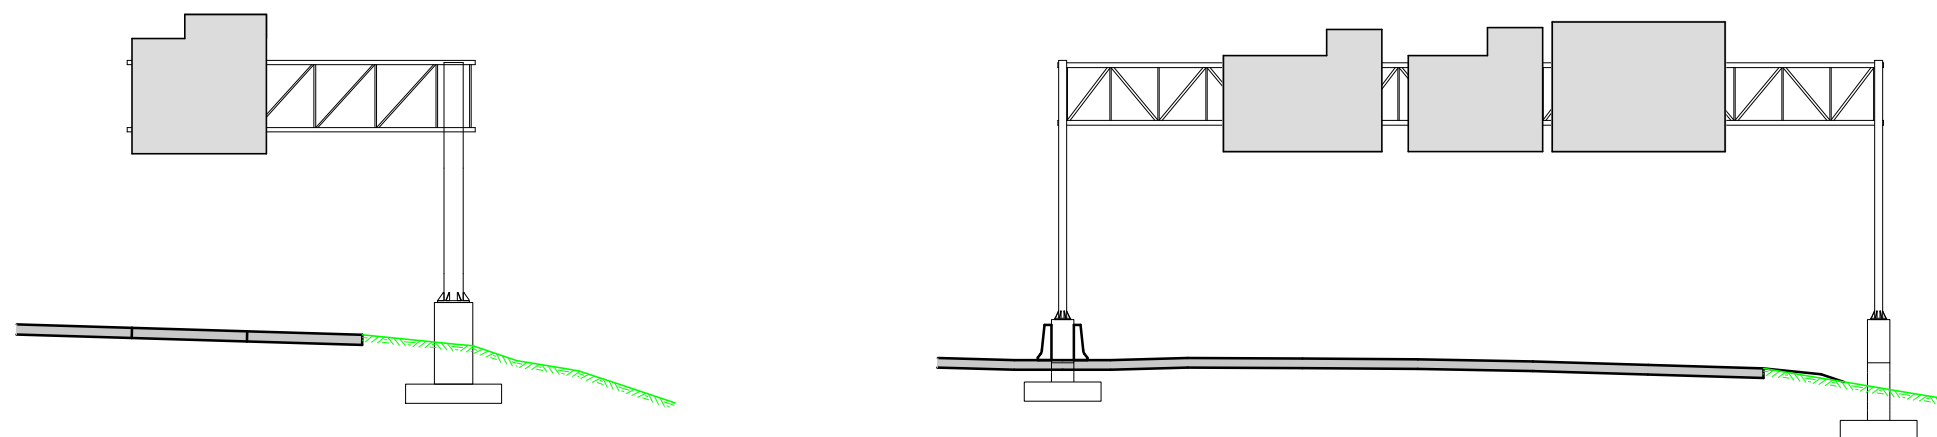
Details indicated are for an installation in a gore area where traffic on non-curbed roadways passes on both sides of the sign, such as the exit ramp for a rural type interchange.




TYPE 4 INSTALLATION ①
(OVERHEAD SUPPORT STRUCTURES)

① Refer to the Office of Bridges and Structures' Sign Truss Standards as detailed in the contract documents. Cantilevers are special designs detailed elsewhere in the contract documents.


 IOWA DOT	REVISION	
	2	04-19-16
	SI-102	
	SHEET 2 of 2	
STANDARD ROAD PLAN		
REVISIONS:	Changed 'Lane Edge Line' to 'Edge of Traveled Way', modified notes and added Possible Contract Items and Tabs, Added FOUR POST DETAIL.	
		
APPROVED BY DESIGN METHODS ENGINEER		
<div>LOCATIONS - TYPE 'B' SIGNS</div>		

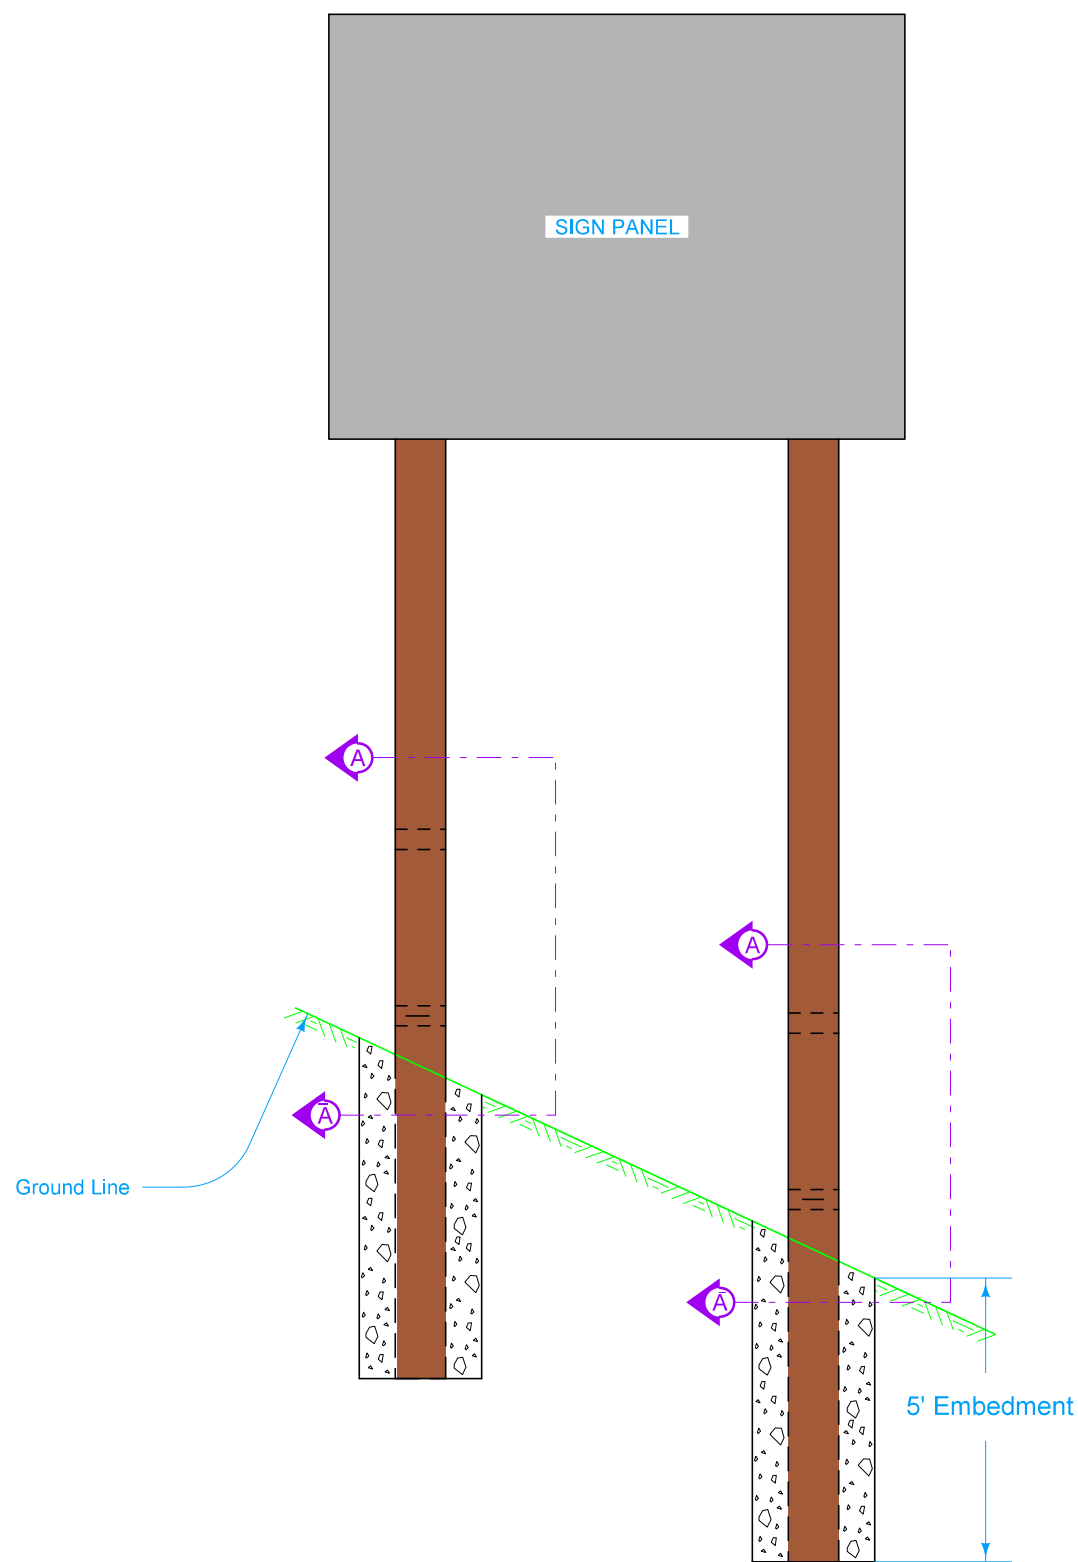

FRONT VIEW

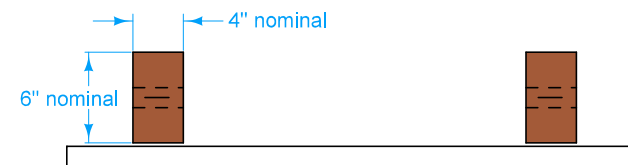

Top View

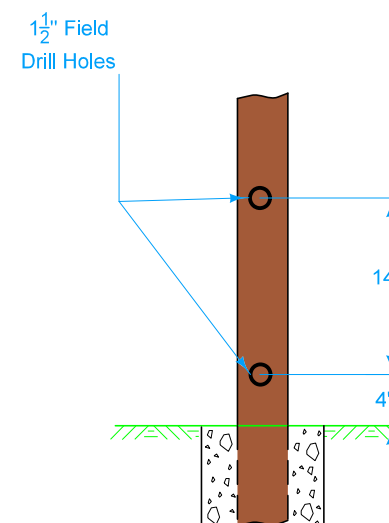




Section A-A

Possible Contract Item:
Wood Posts for Type A or Type B Signs, 4 in. x 6 in.


Possible Tabulations:

190-50
190-51


 IOWA DOT	REVISION	
	2	04-19-1
	SI-111	
	SHEET 1 of 1	
STANDARD ROAD PLAN		
REVISIONS:	Added "nominal" to wood post dimensions. Labeled 5' depth of post embedment. Added possible tabulations and replaced DOT logo in title block.	
		
APPROVED BY DESIGN METHODS ENGINEER		
SUPPORT STRUCTURES - WOOD POSTS		

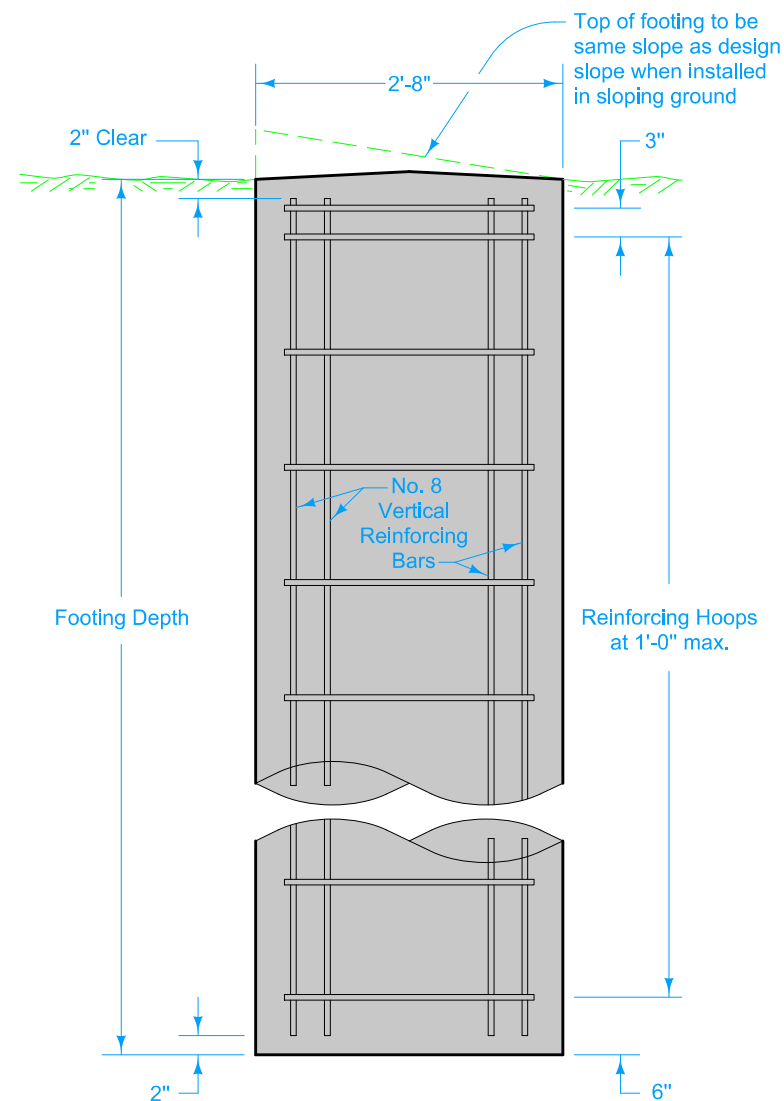


**INSTALLATION
NORMAL FOOTING IN EARTH**

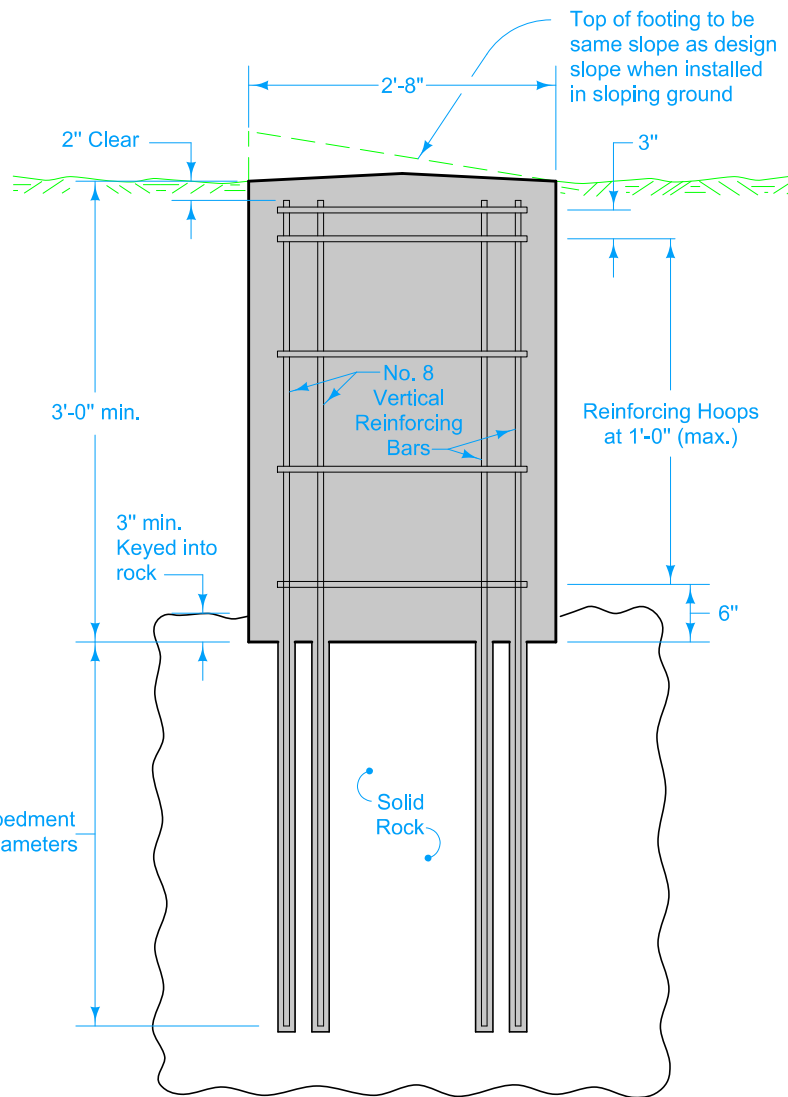

**ALTERNATE DESIGN
FOOTING IN SOLID ROCK** ③

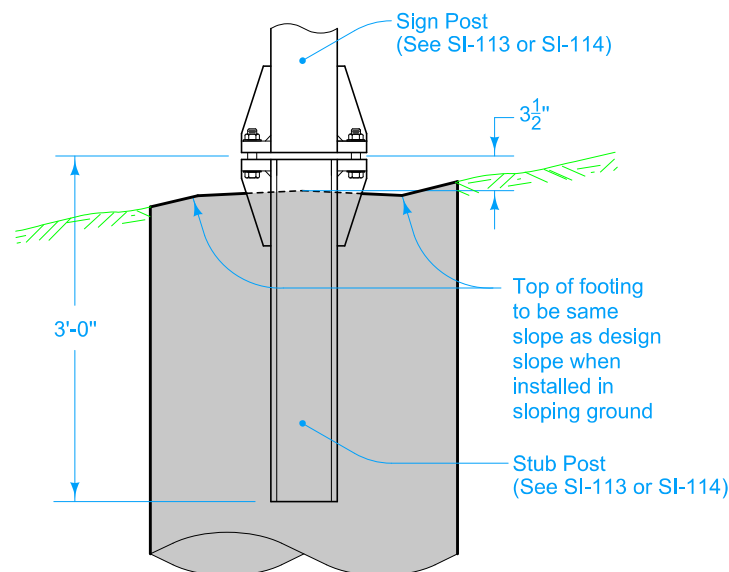

BREAKAWAY POST INSTALLATION

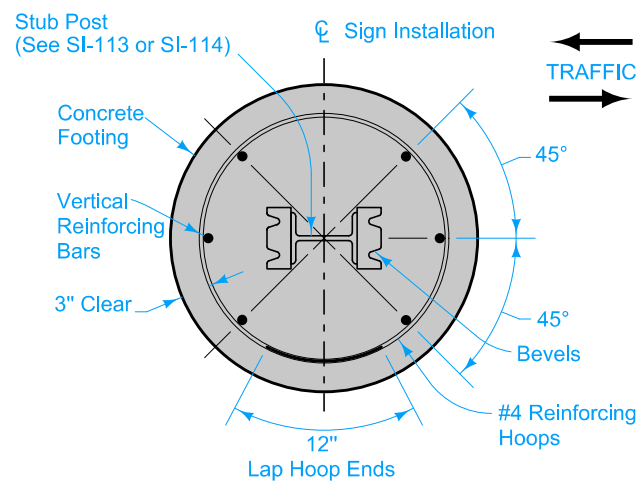

PLAN
(Reinforcing Placement and Sign Orientation)

Construct the footing as shown for normal footing in earth. Where solid rock is encountered, the alternate design for footing in solid rock may be used with the approval of the Engineer.

Dispose of all excavation for the footing in the area adjacent to the footing and shape to normal ground contour, unless directed otherwise by the Engineer.

Hold the stub post in proper position by an approved device to ensure that it remains in proper position upon completion of concrete placement.


The contract price for size of footing required is full compensation for footing as detailed hereon, including all necessary excavation. Excavation in Unexpected Rock will be paid for according to Article 2524.05, I, of the Standard Specifications.

- ① Lengths are for normal footings. Required length may vary where alternate rock design is used.
- ② Refer to the contract documents for post size.
- ③ Set vertical bars in solid rock as follows:
 1. Drill holes twice bar diameter and fill with water.
 2. When hole is fully saturated, blow water out and fill two-thirds depth with sand cement mortar.
 3. Insert bar and consolidate mortar.
 4. Fill hole to top with mortar.

Possible Contract Item:
Concrete Footing for Breakaway Sign Post


FOOTING REINFORCING DATA			
Standard	Post Size	Footing Depth	Vertical Rein. Bar Length ①
SI-113 ②	W6x12	6'-0"	5'-8"
	W8x21	7'-6"	7'-2"
SI-114	W12x26	9'-0"	8'-8"
SI-114	4"x6"	7'-6"	7'-2"

		REVISION			
		New	04-19-16		
STANDARD ROAD PLAN		SI-112			
		SHEET 1 of 1			
REVISIONS: New, Combined footing information previously shown on SI-113 and SI-114. Added Reference to 2540.05, I in notes.					
APPROVED BY DESIGN METHODS ENGINEER					
FOOTINGS FOR STEEL BREAKAWAY POSTS					

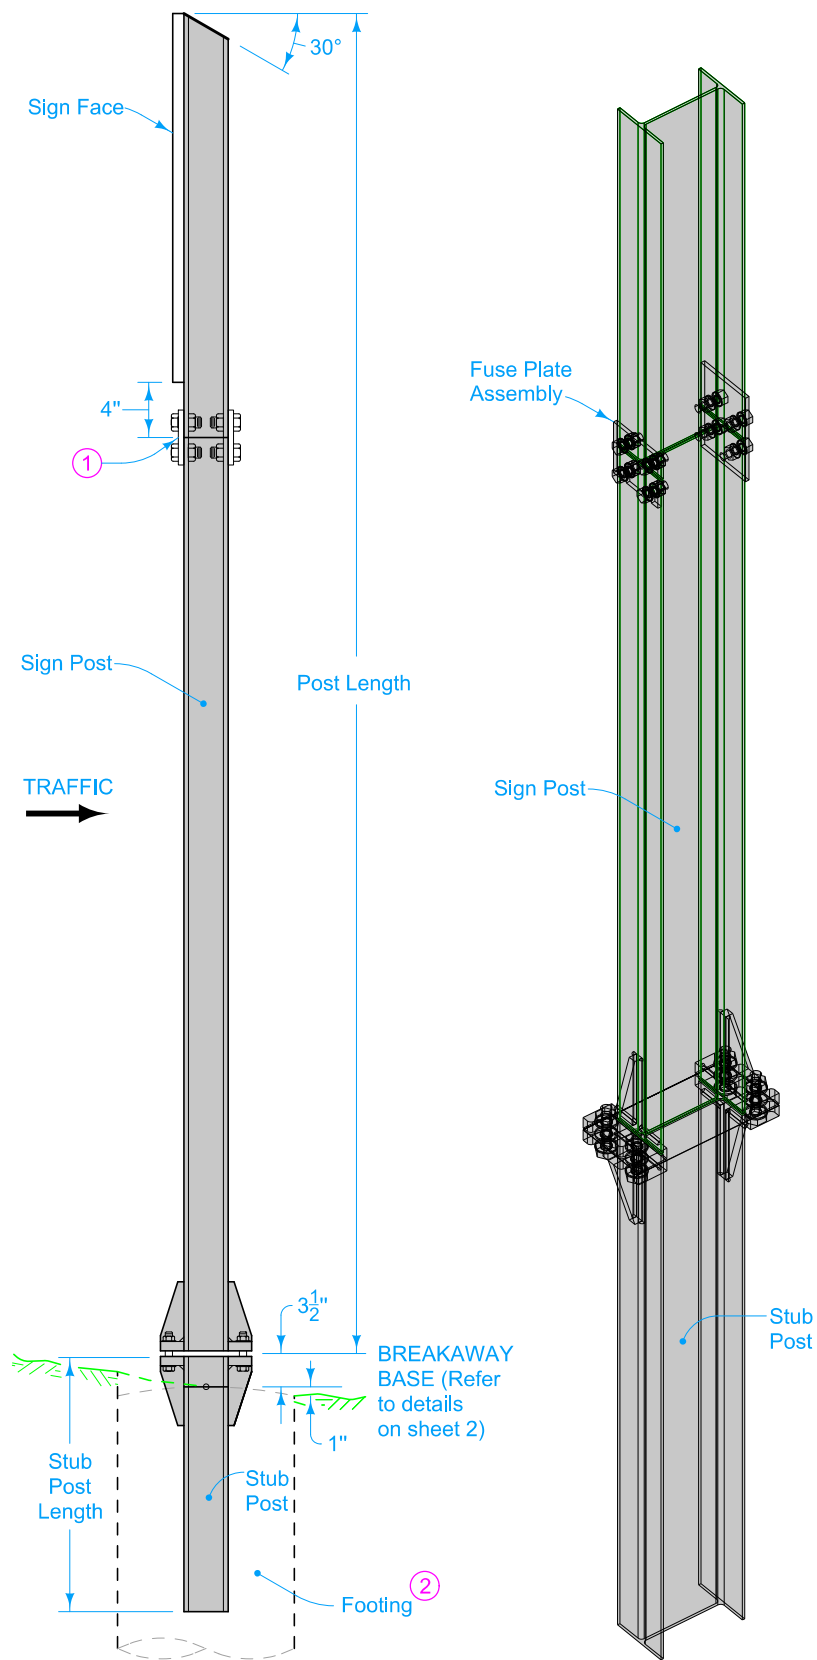


SIGN INSTALLATION
Side View

STUB & SIGN POSTS
3d View

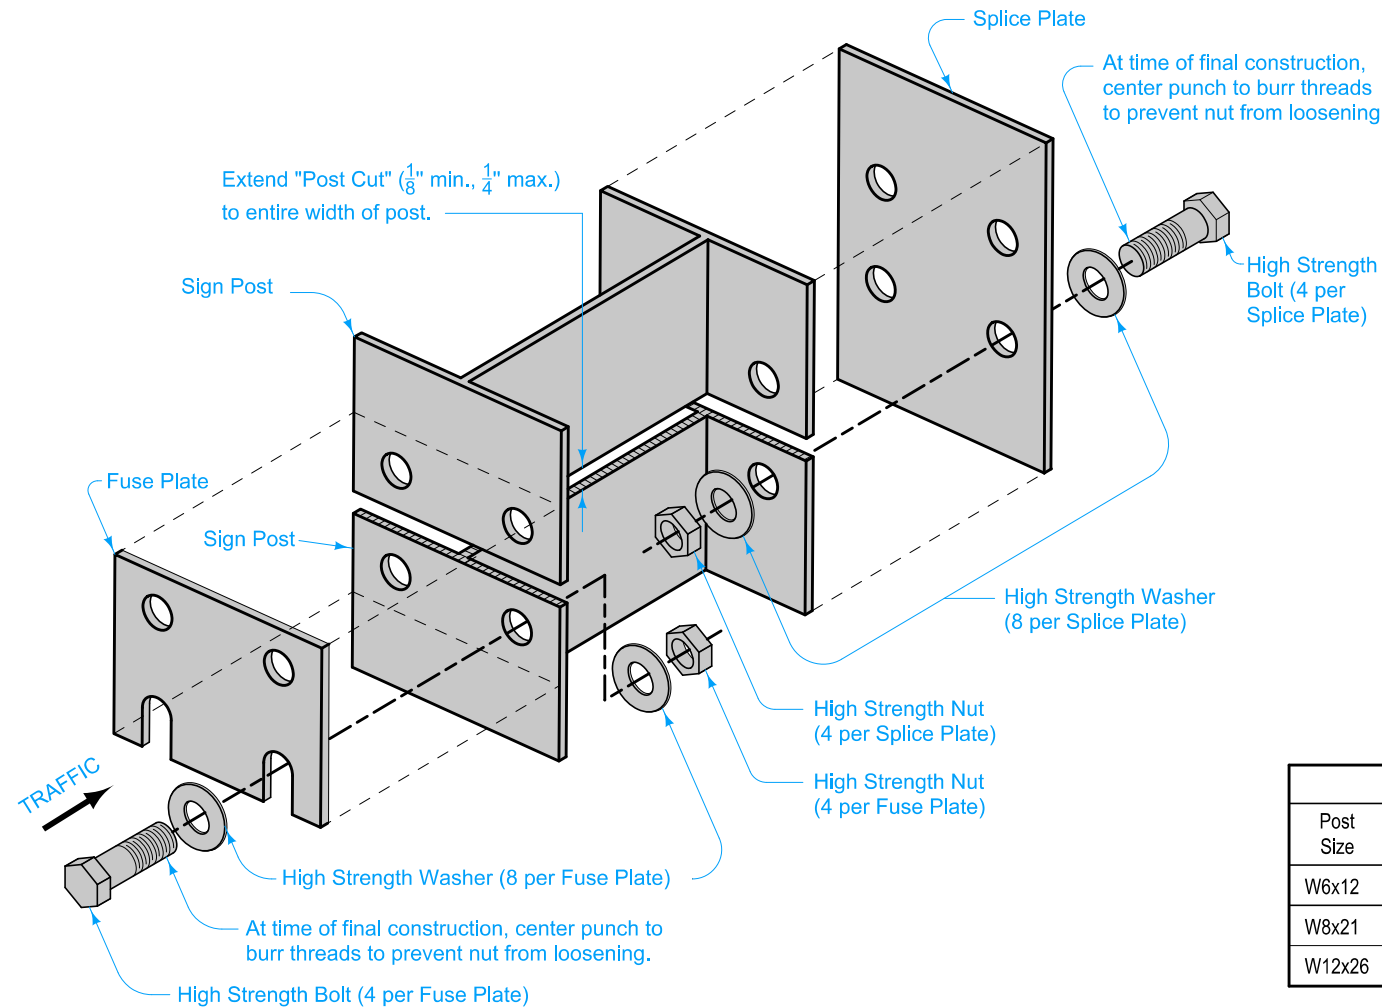

FUSE PLATE ASSEMBLY

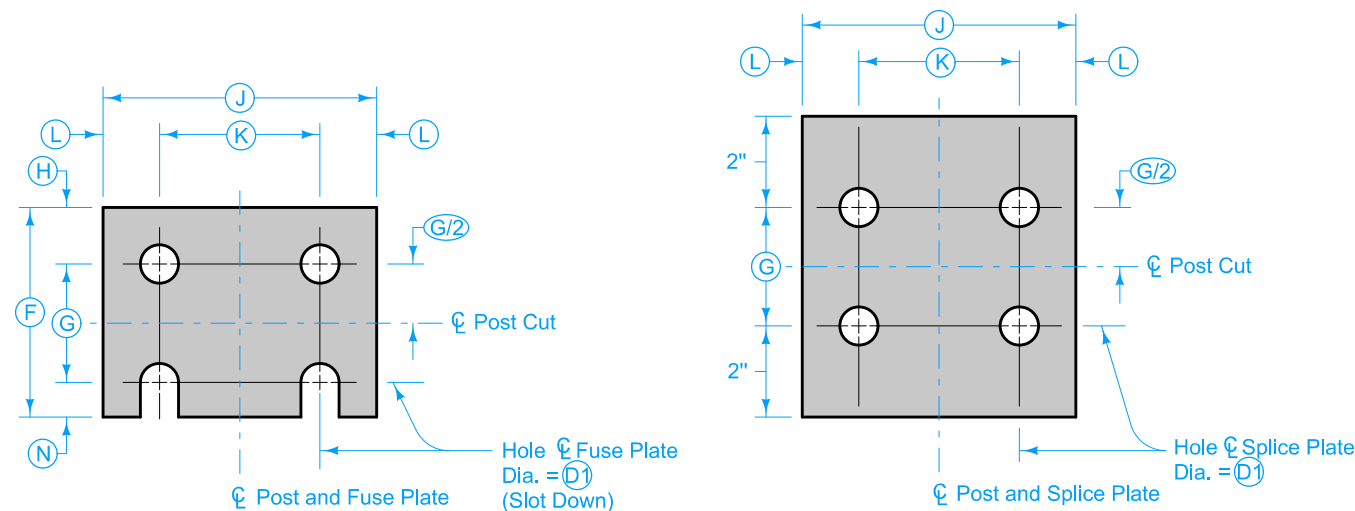

FUSE PLATE
(Thickness T_3)

SPLICE PLATE
(Thickness T_4)


Plumb signpost by installing brass stock or strip shims complying with ASTM B36. Furnish two shims each of 0.012" and 0.032" thickness (total of 4 per post).

- ① Not for single post installations.
- ② Refer to Standard Road Plan **SI-112** for footing information.


FUSE AND SPLICE PLATE DATA											
Post Size	Bolt Dia.	F	G	H	J	K	L	N	D1	T3	T4
W6x12	5/8	3 3/4	2"	1 1/8	4"	2 1/4	7/8	5/8	11/16	3/8	1/4
W8x21	7/8	4 7/8	2 1/2	1 1/2	5 1/4	2 3/4	1 1/4	7/8	15/16	5/8	3/8
W12x26	7/8	5 3/8	3"	1 1/2	6 1/2	3 1/2	1 1/2	7/8	15/16	5/8	3/8

Possible Contract Item:
Steel Breakaway Sign Post for Type A or B Signs


REVISION		SHEET 1 of 2
7	10-15-19	
STANDARD ROAD PLAN		SI-113
REVISIONS: Modified C dimension for W 6 x 12 post in BREAKAWAY BASE DATA table on Sheet 2.		
APPROVED BY DESIGN METHODS ENGINEER		
SUPPORT STRUCTURES - STEEL BREAKAWAY POSTS		

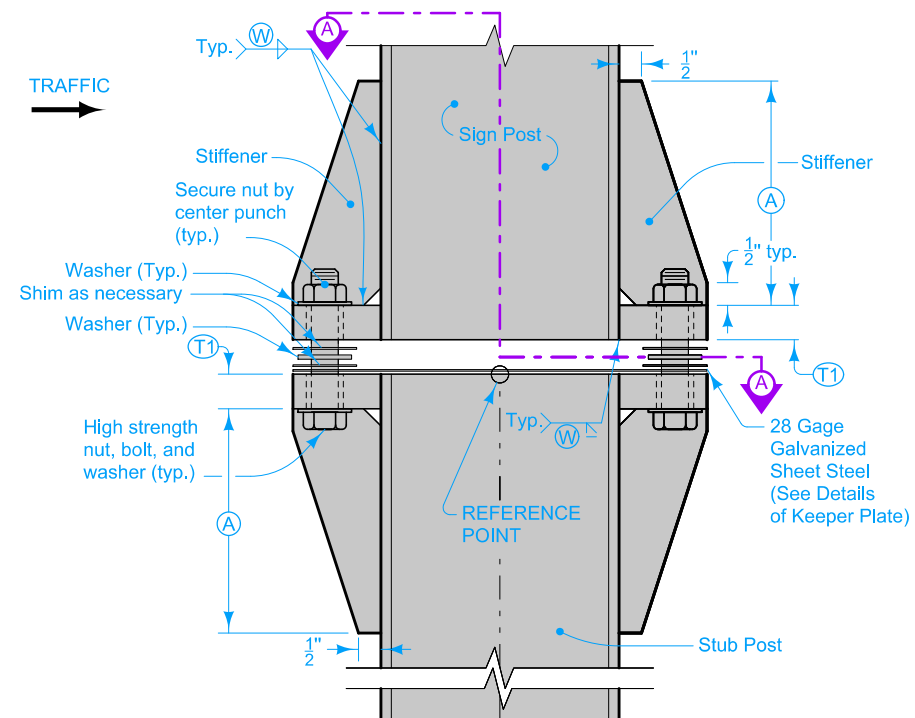


BREAKAWAY BASE
Side View
(Alternate 1)

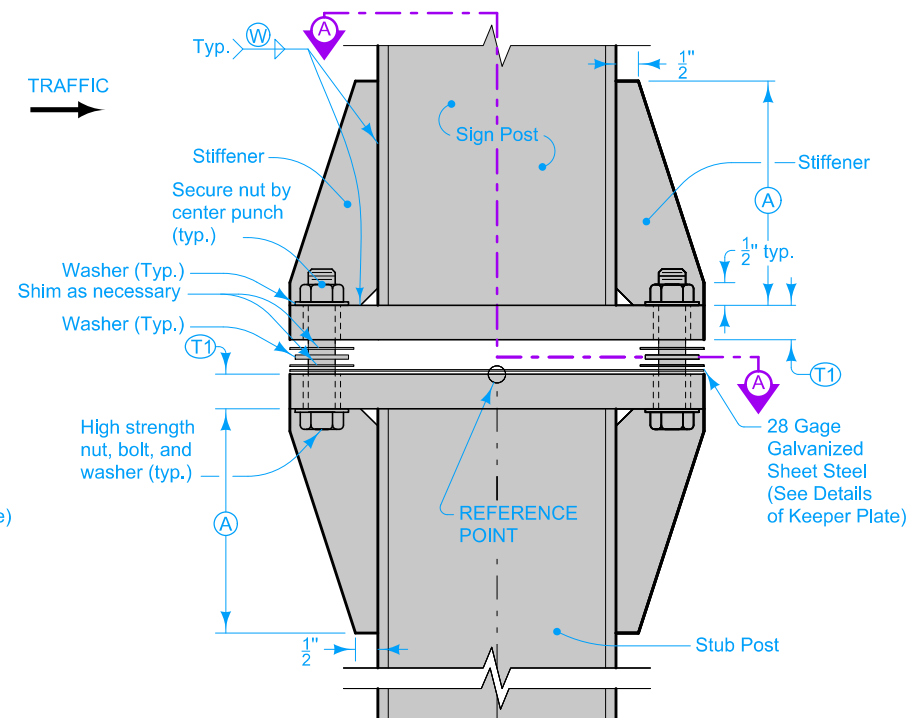


BREAKAWAY BASE
Side View
(Alternate 2)

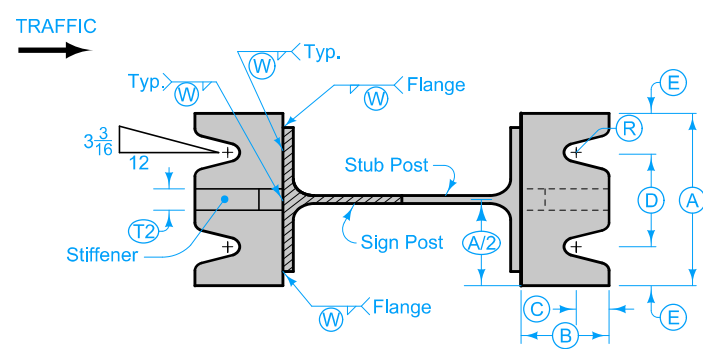


SECTION A-A
PLAN - BASE
(ALTERNATE 1)

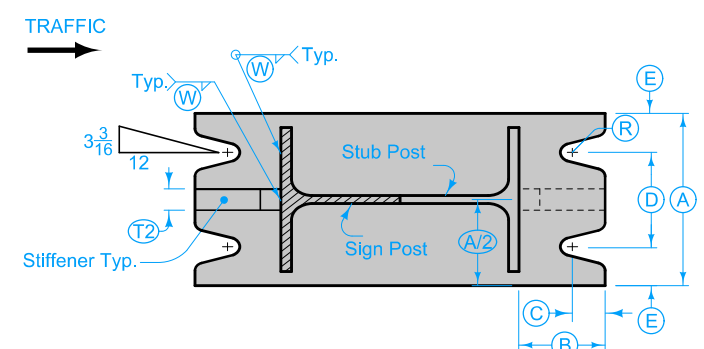

SECTION A-A
PLAN - BASE
(ALTERNATE 2)

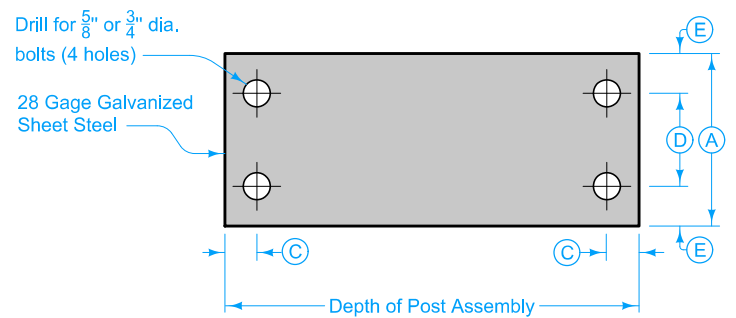

KEEPER PLATE



BREAKAWAY BASE DATA										
Post Size	Bolt Size & Torque	A	B	C	D	E	T1	T2	W	R
W 6 x 12	5/8" dia. x 2 3/4" Torque = 37.50 ft. lbs.	5"	2"	3/4"	2 3/4"	1 1/8"	3/4"	1/2"	1/4"	11/32"
W 8 x 21 W 12 x 26	3/4" dia. x 3 1/2" Torque = 62.50 ft. lbs.	6"	2 1/4"	7/8"	3 1/2"	1 1/4"	1"	3/4"	5/16"	13/32"




The following Base Plate alternates are considered equivalent:

Alternate 1 - Weld base plates (2 each), to sides of signpost and stub post flanges.

Alternate 2 - Weld base plate (1 each) to end of sign post and stub post. Properly match and align the bolt holes and notches in the stub post plate and the sign post plate as indicated herein.


Grind smooth all welds and galvanizing between Base Plates.

 STANDARD ROAD PLAN	REVISION	
	7	10-15-19
	SI-113 SHEET 2 of 2	
REVISIONS: Modified C dimension for W 6 x 12 post in BREAKAWAY BASE DATA table on Sheet 2.		
APPROVED BY DESIGN METHODS ENGINEER		
SUPPORT STRUCTURES - STEEL BREAKAWAY POSTS		

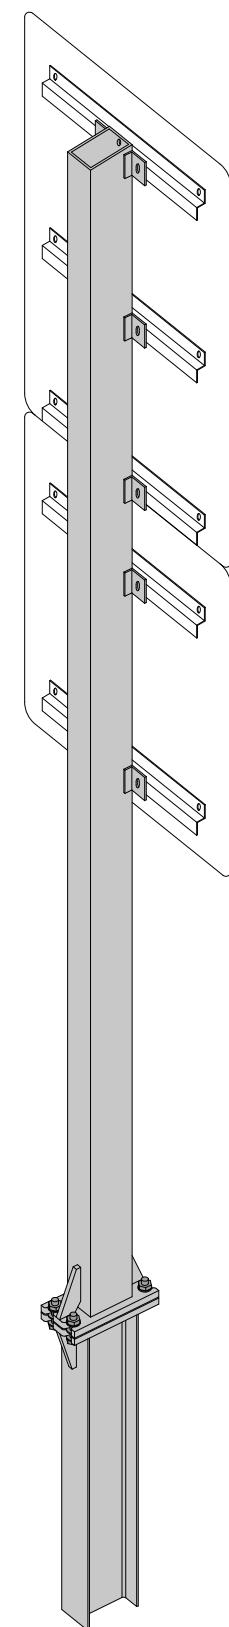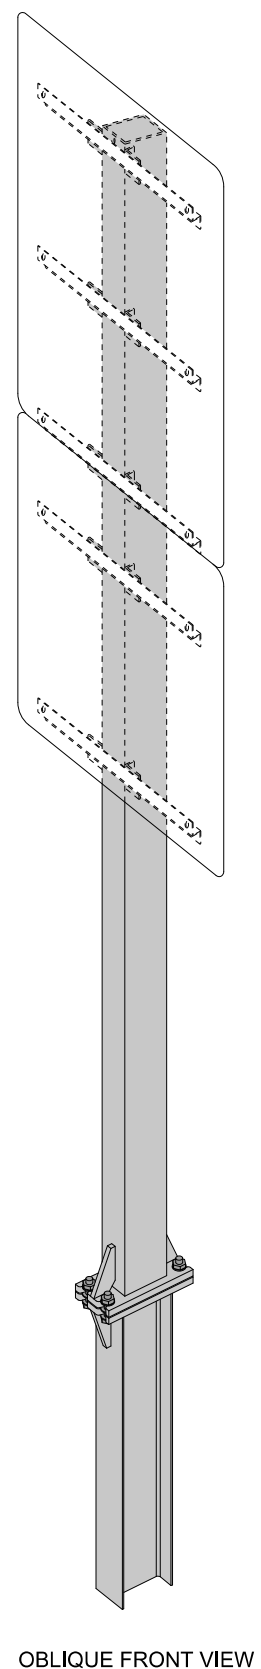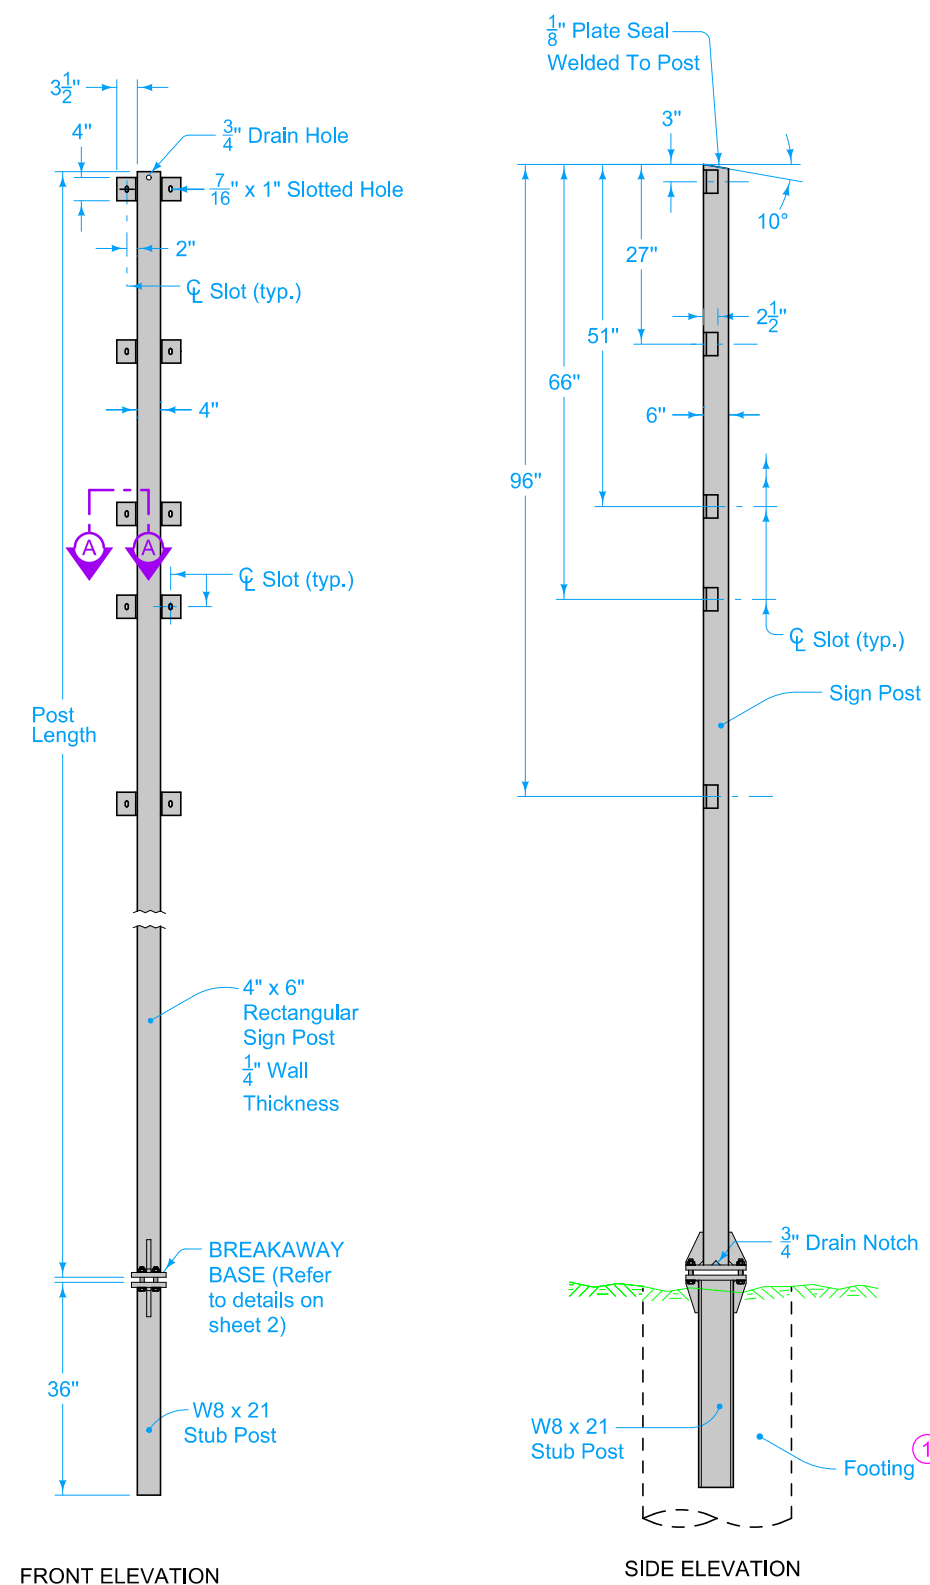




Plumb signpost by installing brass stock or strip shims complying with ASTM B 36. Furnish two shims each of 0.012" and 0.032" thickness (total of 4 per post).

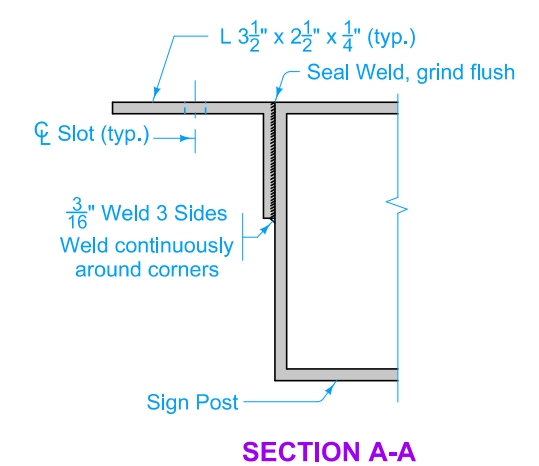① Refer to Standard Road Plan SI-112 for footing information.




Possible Contract Item:
Steel Breakaway Sign Post, Rectangular Tube


 IOWA DOT	REVISION	
	3	04-19-16
	SI-114	
	SHEET 1 of 2	
STANDARD ROAD PLAN		
REVISIONS:	Moved footing information to SI-112. Changed title and added oblique views.	
		
APPROVED BY DESIGN METHODS ENGINEER		
FREEWAY/EXPRESSWAY SPEED LIMIT SUPPORT POSTS		

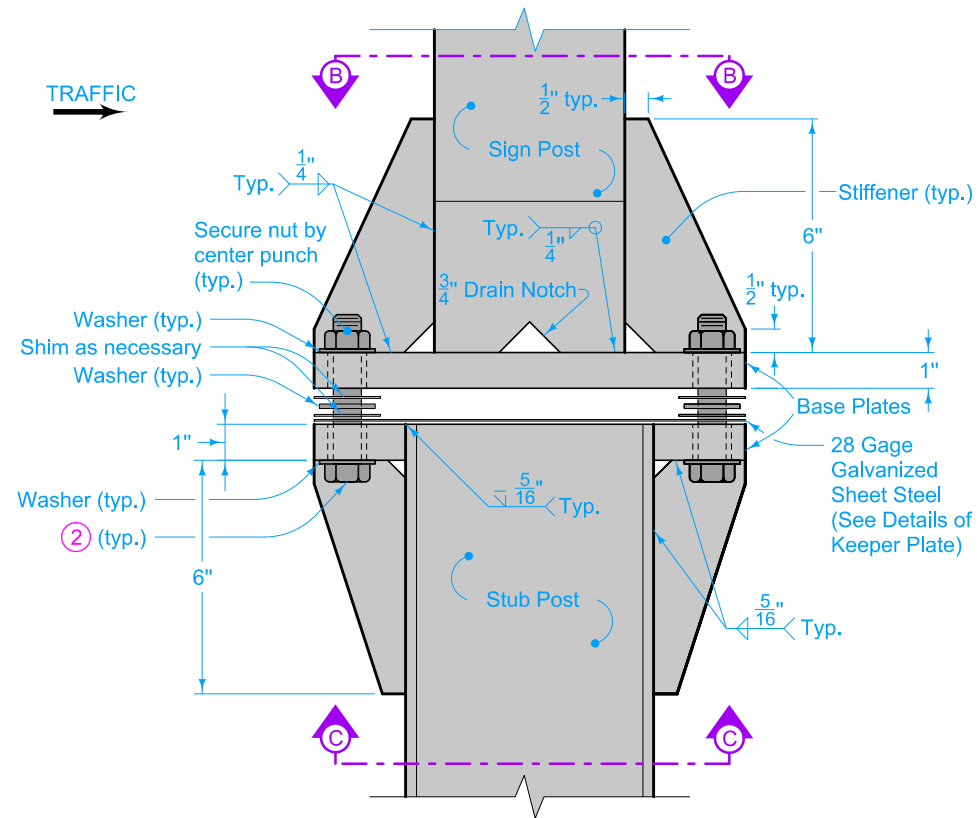


BREAKAWAY BASE
Side View
(Alternate 1)

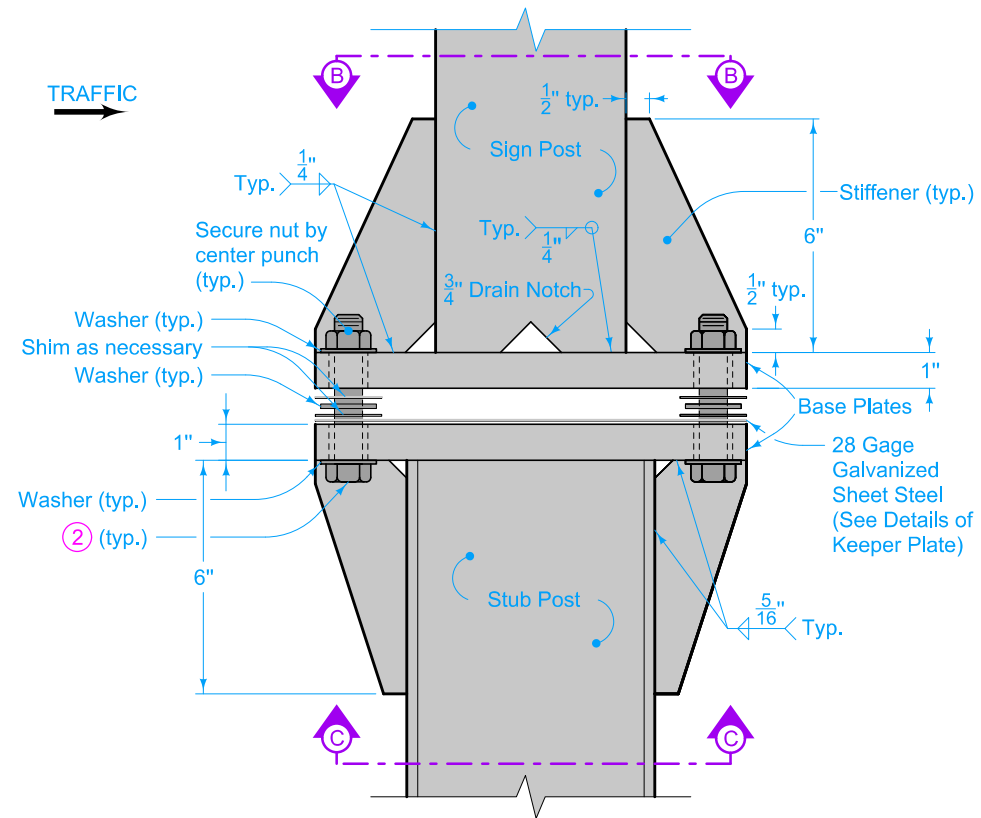


BREAKAWAY BASE
Side View
(Alternate 2)

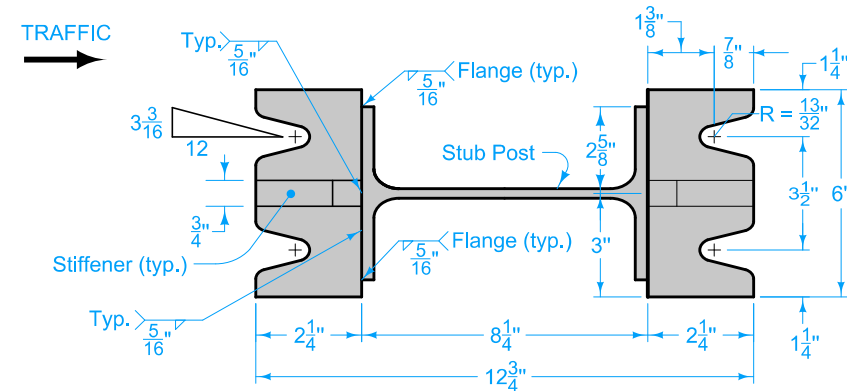


SECTION C-C
PLAN - BASE
(ALTERNATE 1)

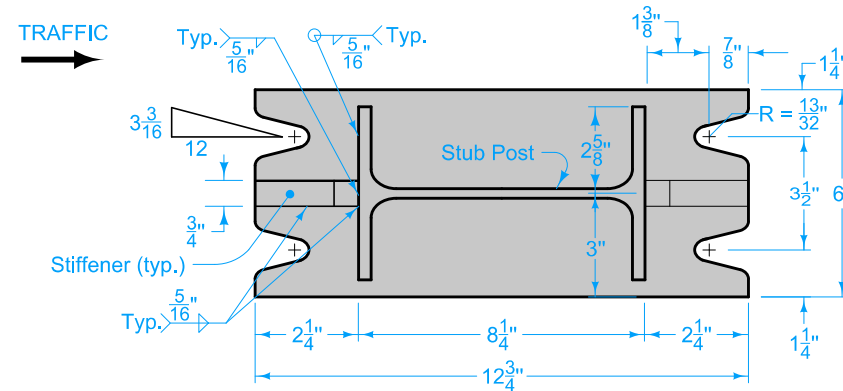


SECTION C-C
PLAN - BASE
(ALTERNATE 2)

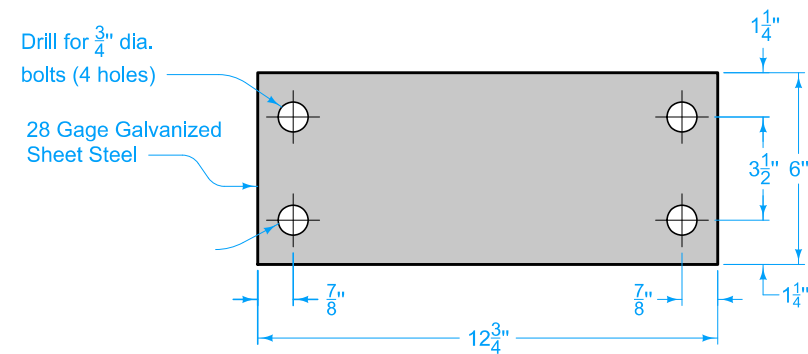

KEEPER PLATE



SHIM

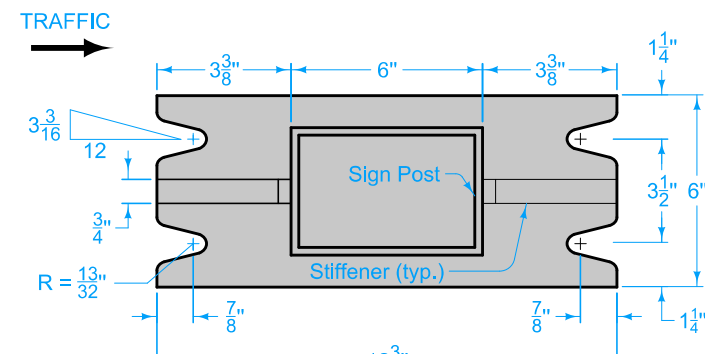

SECTION B-B
PLAN - BASE



The following Base Plate alternates are considered equivalent:


ALTERNATE 1 - Weld base plates (2 each) to sides of stub post flanges.

ALTERNATE 2 - Weld base plate (1 each) to end of stub post. During assembly, properly match and align the bolt holes and notches in the stub post plate and the sign post plate as indicated hereon.


Grind smooth all welds and galvanizing between Base Plates.

② $\frac{3}{4}$ " dia. x $3\frac{1}{2}$ "
Torque = 62.50 ft. lbs.


 IOWA DOT	REVISION	
	3	04-19-16
	SI-114	
	SHEET 2 of 2	
REVISIONS:	Moved footing information to SI-112. Changed title and added oblique views.	
		
APPROVED BY DESIGN METHODS ENGINEER		
FREEWAY/EXPRESSWAY SPEED LIMIT SUPPORT POSTS		

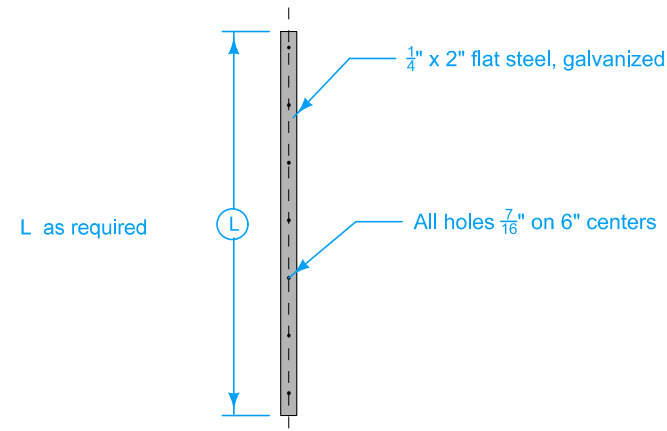


AUXILIARY
SIGN MOUNTING BAR
Type 1

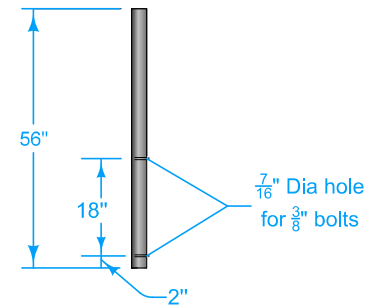


PIPE DETAIL
(Bracket 'F')
Type 4A

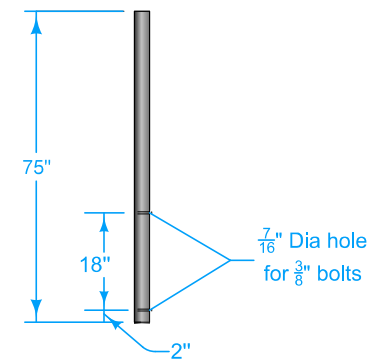


PIPE DETAIL
(Bracket 'F₁')
Type 4B

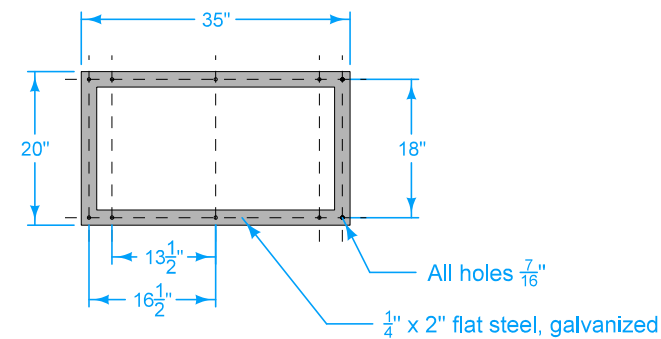


ONE POST
SIGN MOUNTING BRACKET
FOR 24" ROUTE SHIELDS
Type 2

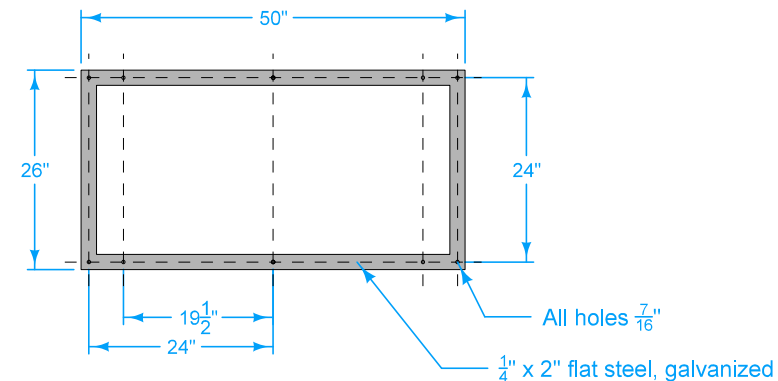

ONE POST
SIGN MOUNTING BRACKET
FOR 36" ROUTE SHIELDS
Type 5

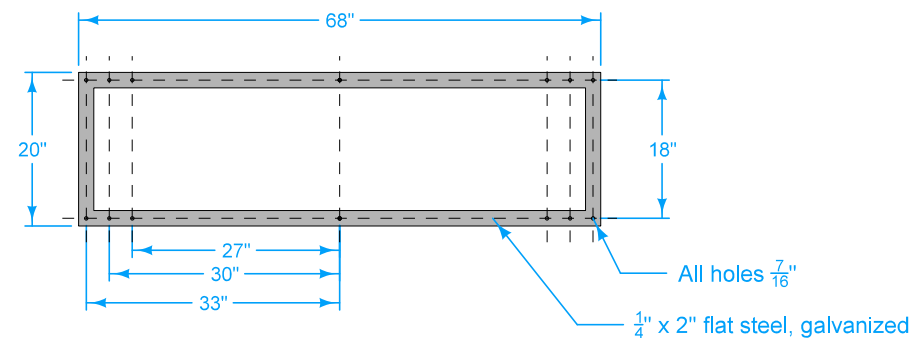

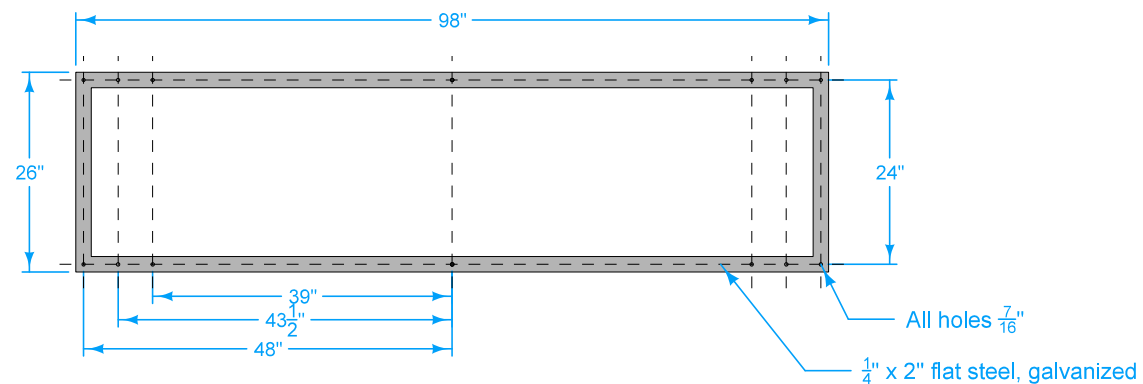






TWO POST
SIGN MOUNTING BRACKET
FOR 24" ROUTE SHIELDS
Type 3





TWO POST
SIGN MOUNTING BRACKET
FOR 36" ROUTE SHIELDS
Type 6


Bid price for the brackets is to include the necessary mounting bolts, washers, nuts, and set screws.

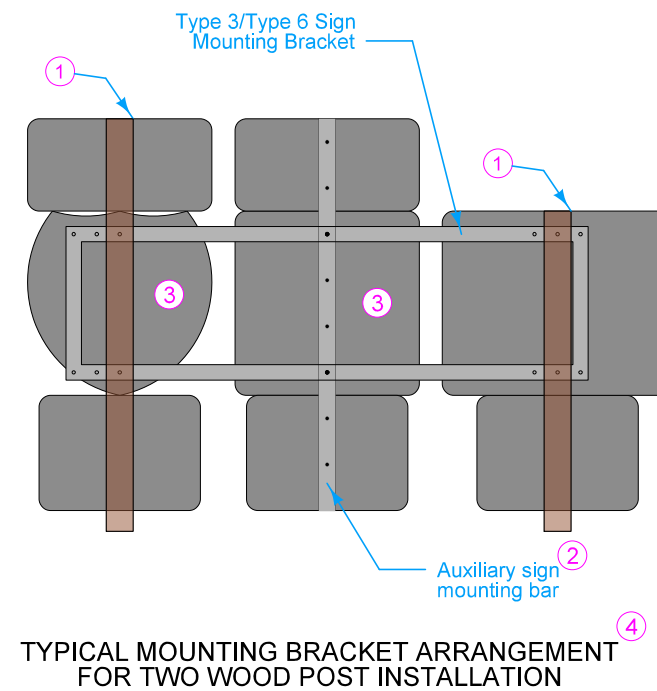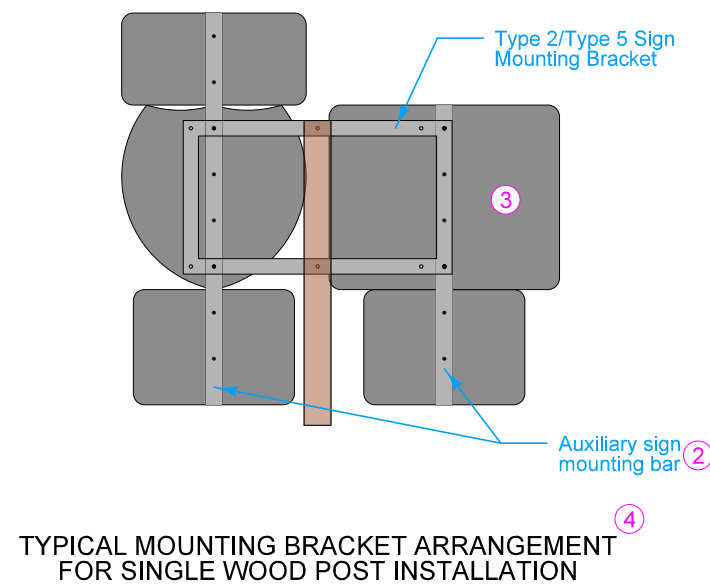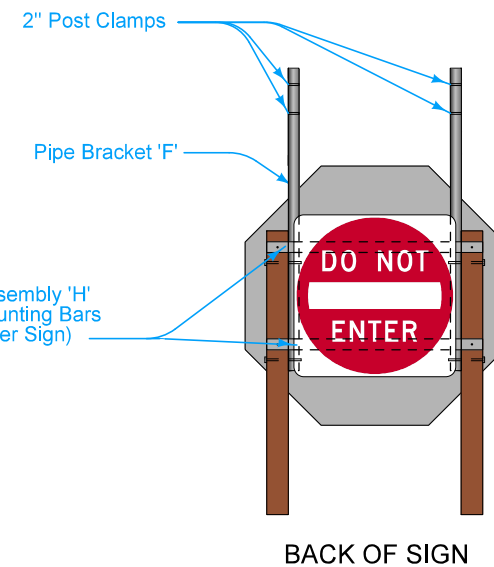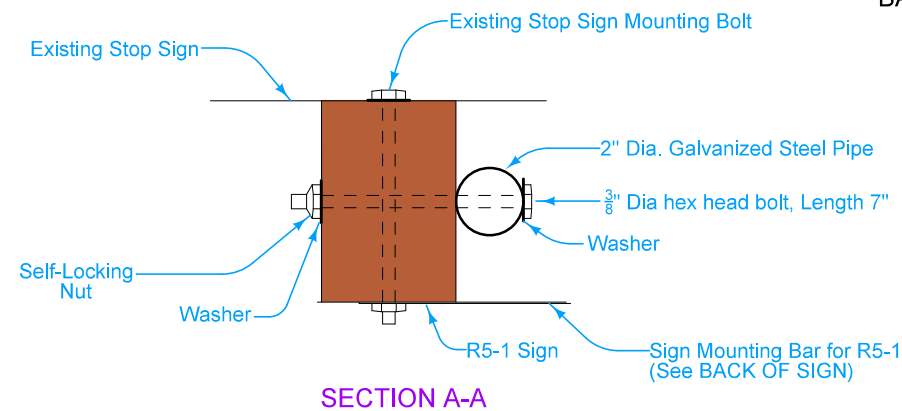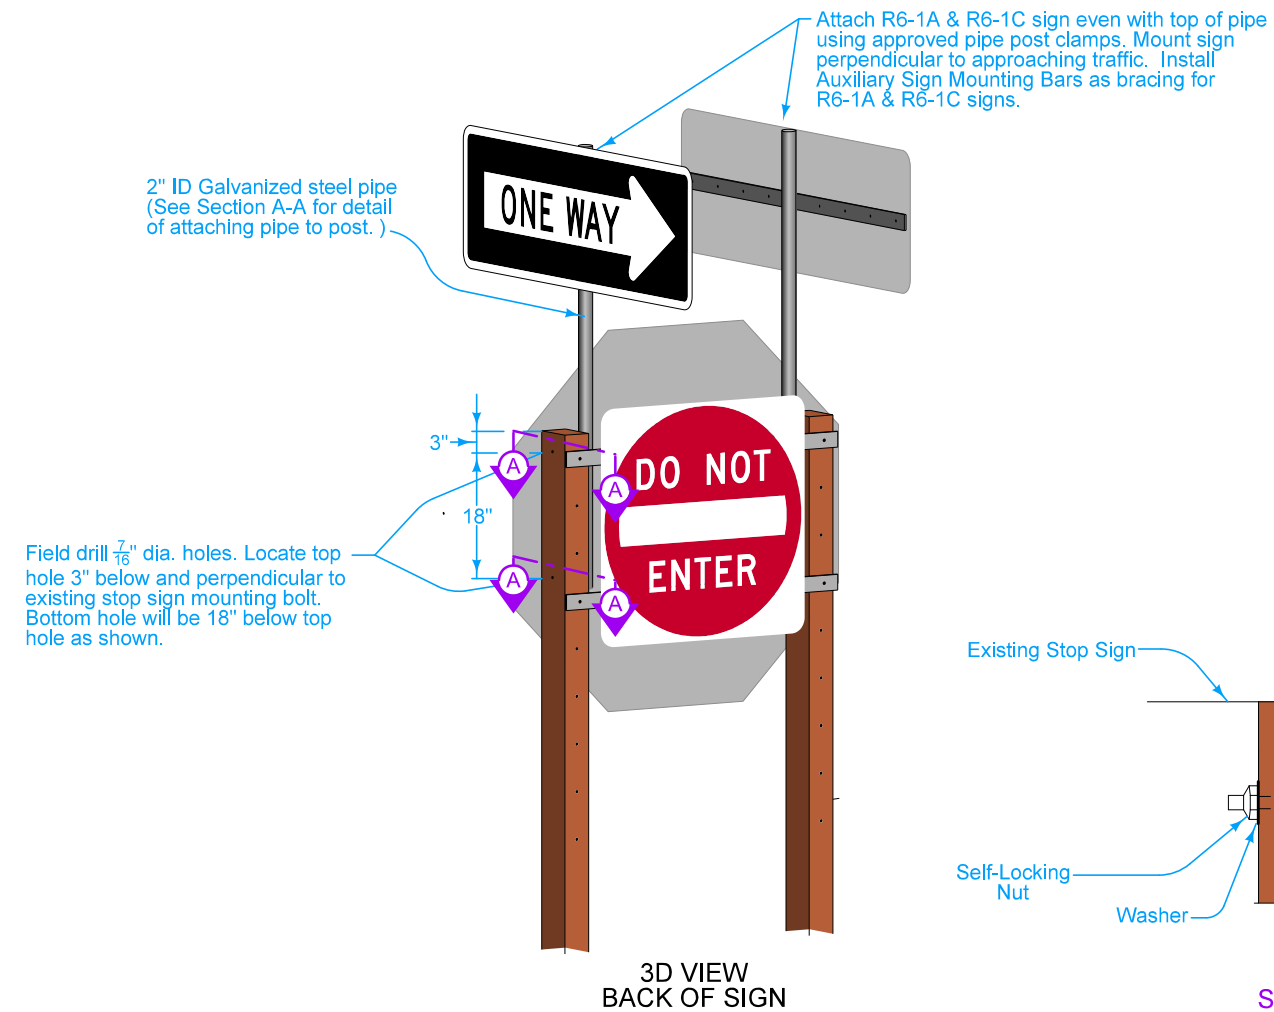 IOWA DOT	REVISION	
	3	10-17-17
	SI-119	
	SHEET 1 of 2	
STANDARD ROAD PLAN		
REVISIONS:	Auxiliary sign mounting brackets have been added to 3D VIEW BACK OF SIGN on page 2.	
		
APPROVED BY DESIGN METHODS ENGINEER		
SUPPORT STRUCTURES - MOUNTING BRACKETS		



- ① Mount the wood post so that the top is flush with the top of the sign panel.
- ② Extend the Auxiliary Sign Mounting Bracket to the full length of the proposed mounted sign assembly.
- ③ Maintain a 3 inch space between Route Shields. This should be accomplished by using different drilled holes specified on the brackets, and will vary depending on the number of 2 or 3 digit signs in the assembly.
- ④ Perforated square steel tube (PSST) posts may be substituted for wood posts if approved by the Engineer.

 IOWA DOT	REVISION	
	3	10-17-17
	SI-119	
	SHEET 2 of 2	
STANDARD ROAD PLAN		
REVISIONS:	Auxiliary sign mounting brackets have been added to 3D VIEW BACK OF SIGN on page 2.	
		
APPROVED BY DESIGN METHODS ENGINEER		
SUPPORT STRUCTURES - MOUNTING BRACKETS		

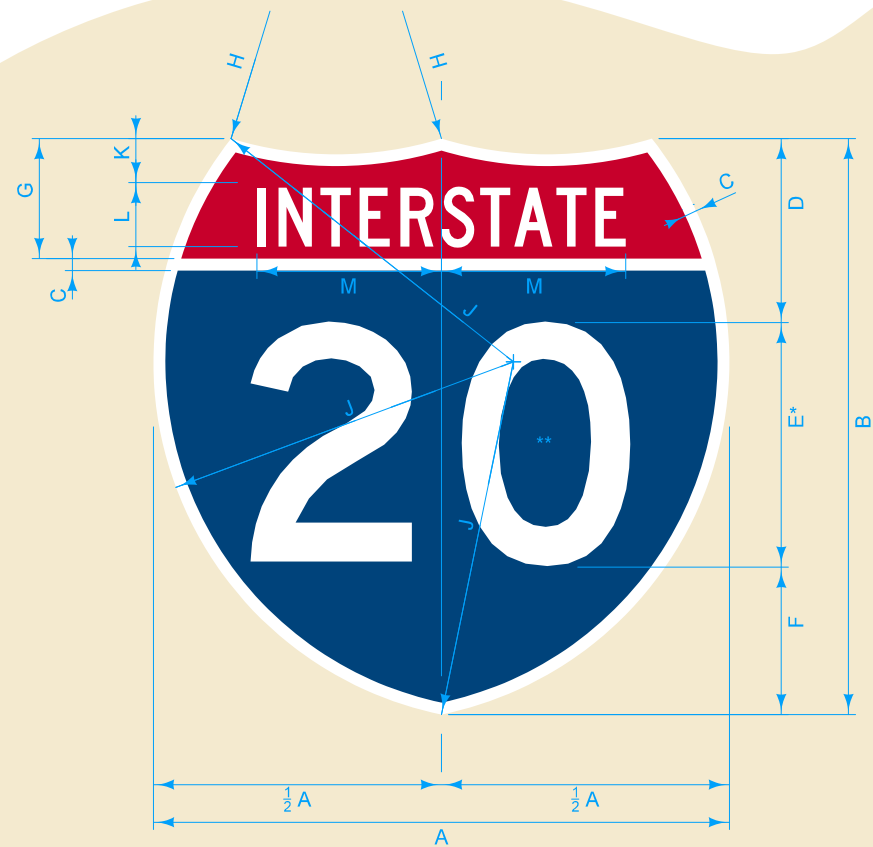



INTERSTATE ROUTE MARKERS


* Series 2000 Standard Alphabets.
** Optically space numerals about vertical center line.

Sign	Width	Height	Border Thick.	Numeral Top Offset	Numeral Height & Font	Numeral Bottom Offset	Upper Section Height	Top Radius	Side Radius	Text Top Offset	Text Height & Font	Text Length Lt & Rt
	A	B	C	D	E	F	G	H	J	K	L	M
2 Digit Routes	48	48	1	15.375	20 C	12.625	10	30	30	4	5 C	15.307
	36	36	0.75	11.5	15 C	9.5	7.5	22.5	22.5	2.75	4 C	12.246
	24	24	0.5	7.625	10 C	6.375	5	15	15	2	2.5 C	7.658
	15	15	0.3125	4.75	6.35	3.9	3.125	9.375	9.375	1	1.75	5.32
	13	13	0.271	4.125	5.5 C	3.375	2.708	8.125	8.125	0.875	1.5 C	4.6125
	10	10	0.208	3.25	4.25 C	2.5	2.083	6.25	6.25	0.75	1 C	3.075
	6	6	0.125	2	2.5 C	1.5	1.25	3.75	3.75	0.5	0.625C	1.92
3 Digit Routes	60	48	1	15.375	20 B	12.625	10	48	34	4	5 E	21.818
	45	36	0.75	11.5	15 B	9.5	7.5	36	25.5	2.75	4 E	17.455
	30	24	0.5	7.625	10 B	6.375	5	24	17	2	2.5 E	10.911
	18.75	15	0.3125	4.75	6.35	3.9	3.125	15	10.625	1	1.75	7.58
	16.25	13	0.271	4.125	5.5 B	3.375	2.708	13	9.2083	0.875	1.5 E	6.57
	12	10	0.208	3.25	4.25 B	2.5	2.083	10	7.0833	0.75	1 E	4.38
	7.5	6	0.125	2	2.5 B	1.5	1.25	6	4.25	0.5	0.625E	2.74


All dimensions are in inches unless otherwise designated.

COLORS:
Text: White
Border: White
Background (Interstate): Red
Background (Route No.): Blue

 IOWA DOT	REVISION	
	4	10-16-18
	SI-121	
STANDARD ROAD PLAN	SHEET 1 of 5	
REVISIONS:	Added 15" tall route shields for Interstates, U.S. Hwys, & IA Hwys. Added Circle Note 2 to Sheet 4.	
		
APPROVED BY DESIGN METHODS ENGINEER		
FABRICATION - SIGN LEGEND COMPONENTS		

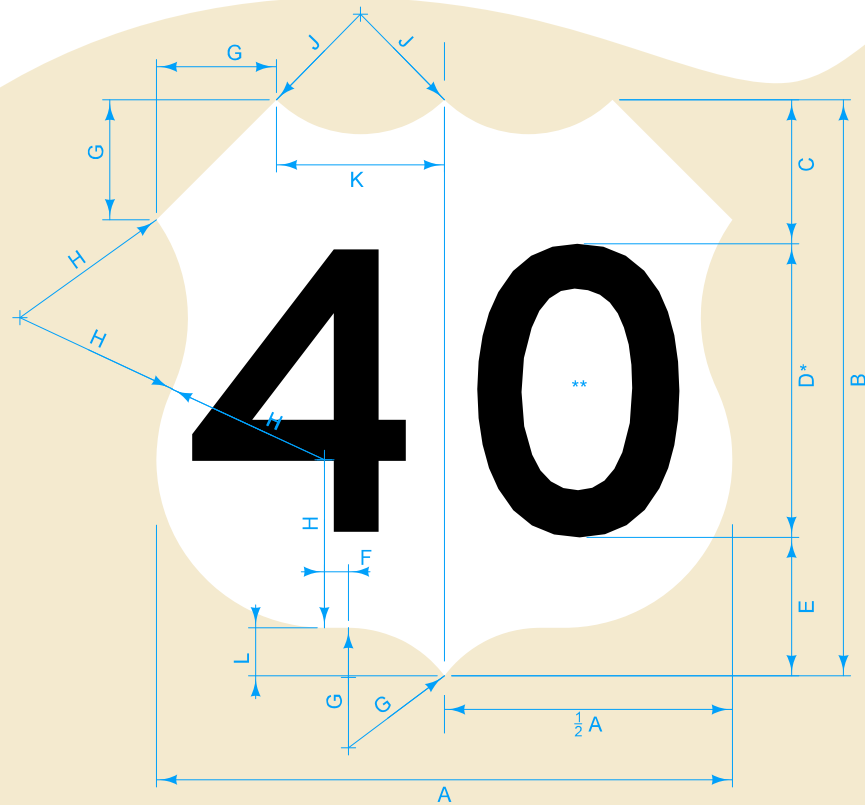

* Series 2000 Standard Alphabets.
** Optically space numerals about vertical center line.

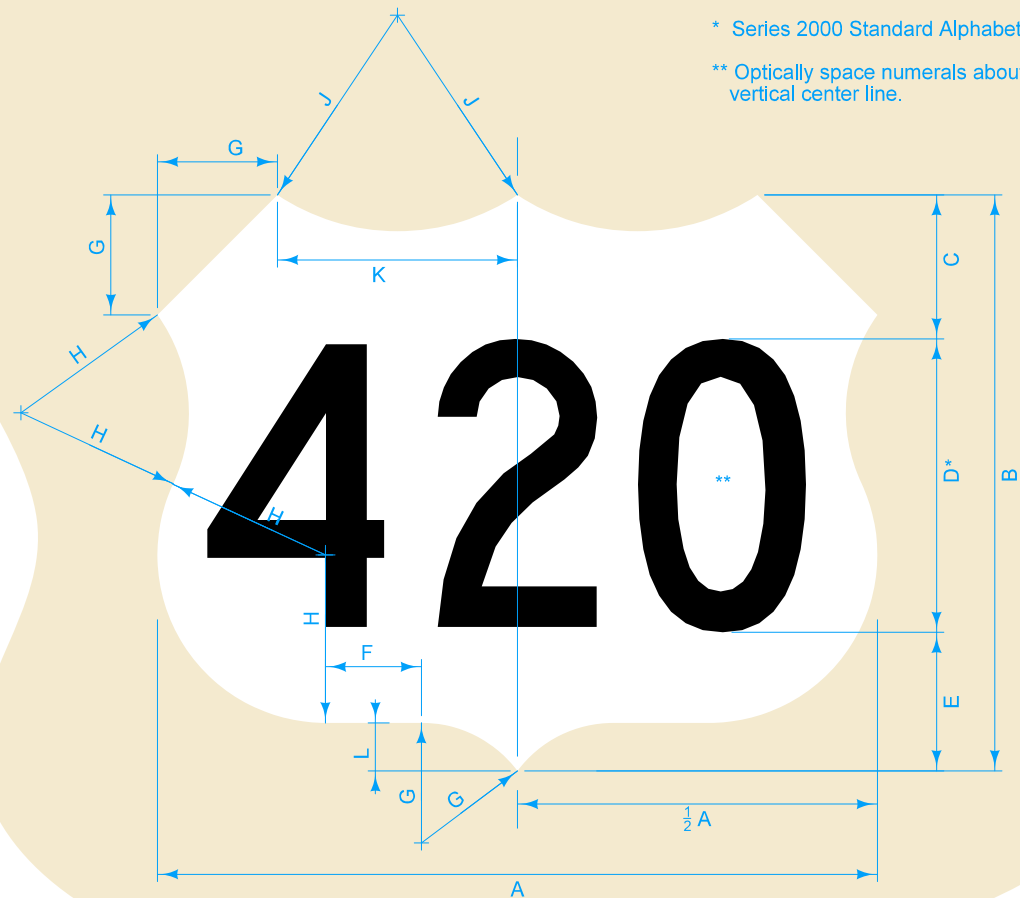

US ROUTE MARKERS




① Black borders added to route shields will not be accepted.

Sign	Width	Height	Numeral Top Offset	Numeral Height & Font	Numeral Bottom Offset	Bottom Tangent Length	Upper Section Height	Corner & Top Radius	Side Radius	Top Radius	Bottom Tangent Offset
1 Digit Routes	A	B	C	D	E	F	G	H	J	K	L
	48	48	11	24 D	13	2	10	14	10	14	4
	36	36	8.25	18 D	9.75	1.5	7.5	10.5	7.5	10.5	3
	24	24	5.5	12 D	6.5	1	5	7	5	7	2
	15	15	3.45	7.5 D	4	0.625	3.125	4.375	3.125	4.375	1.25
	13	13	3	6.5 D	3.5	0.542	2.708	3.792	2.708	3.792	1.083
	10	10	2.25	5 D	2.75	0.417	2.083	2.917	2.083	2.917	0.833
	6	6	1.375	3 D	1.625	0.25	1.25	1.75	1.25	1.75	0.5
2 Digit Routes	48	48	11	24 C	13	2	10	14	10	14	4
	36	36	8.25	18 C	9.75	1.5	7.5	10.5	7.5	10.5	3
	24	24	5.5	12 C	6.5	1	5	7	5	7	2
	15	15	3.45	7.5 C	4	0.625	3.125	4.375	3.125	4.375	1.25
	13	13	3	6.5 C	3.5	0.542	2.708	3.792	2.708	3.792	1.083
	10	10	2.25	5 C	2.75	0.417	2.083	2.917	2.083	2.917	0.833
	6	6	1.375	3 C	1.625	0.25	1.25	1.75	1.25	1.75	0.5
3 Digit Routes	60	48	11	24 B	13	8	10	14	18	20	4
	45	36	8.25	18 B	9.75	5.5	7.5	10.5	13.5	15	3
	30	24	5.5	12 B	6.5	4	5	7	9	10	2
	18.75	15	3.45	7.5 B	4	2.5	3.125	4.375	5.625	6.25	1.25
	16.25	13	3	6.5 B	3.5	2.167	2.708	3.792	4.875	5.416	1.083
	12	10	2.25	5 B	2.75	1.417	2.083	2.917	3.439	3.917	0.833
	7.5	6	1.375	3 B	1.625	1	1.25	1.75	2.25	2.5	0.5

All dimensions are in inches unless otherwise designated.

COLORS:
Text: White
Shield: White



STANDARD ROAD PLAN

REVISIONS: Added 15" tall route shields for Interstates, U.S. Hwys, & IA Hwys. Added Circle Note 2 to Sheet 4.

APPROVED BY DESIGN METHODS ENGINEER



FABRICATION -
SIGN LEGEND COMPONENTS

REVISION

410-16-18

SI-121

SHEET 2 of 5

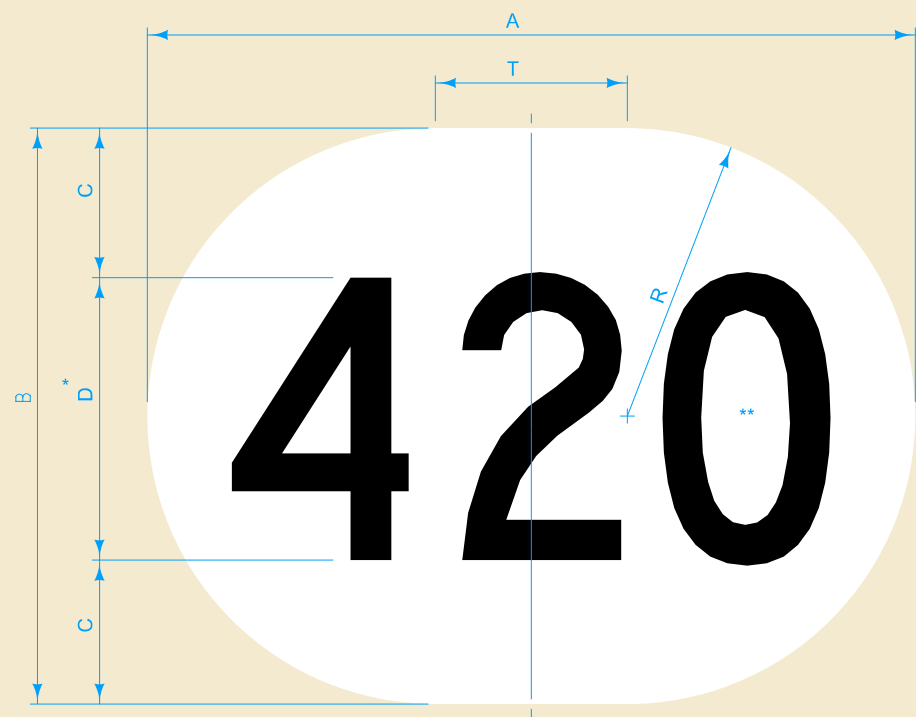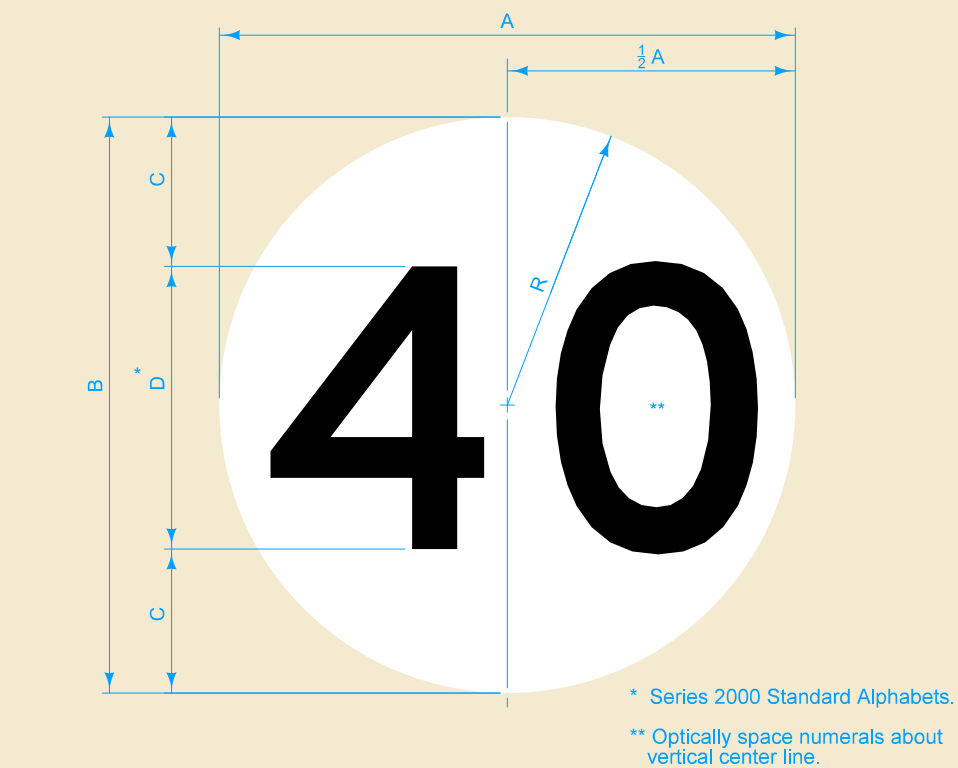

STATE ROUTE MARKERS





① Black borders added to route shields will not be accepted.


Sign	Width	Height	Numeral Offset	Numeral Height & Font	Radius	Tangent
	A	B	C	D	R	T
1 Digit Routes	48	48	12	24 D	24	-
	36	36	9	18 D	18	-
	24	24	6	12 D	12	-
	15	15	3.75	7.5 D	7.5	-
	13	13	3.25	6.5 D	6.5	-
	10	10	2.5	5 D	5	-
	6	6	1.5	3 D	3	-
2 Digit Routes	48	48	12	24 C	24	-
	36	36	9	18 C	18	-
	24	24	6	12 C	12	-
	15	15	3.75	7.5 C	7.5	-
	13	13	3.25	6.5 C	6.5	-
	10	10	2.5	5 C	5	-
	6	6	1.5	3 C	3	-
3 Digit Routes	60	48	12	24 B	24	12
	45	36	9	18 B	18	9
	30	24	6	12 B	12	6
	18.75	15	3.75	7.5 B	7.5	3.75
	16.25	13	3.25	6.5 B	6.5	3.25
	12	10	2.5	5 B	5	2
	7.5	6	1.5	3 B	3	1.5

All dimensions are in inches unless otherwise designated.

COLORS:
Text: Black
Shield: White

 IOWA DOT	REVISION	
	4	10-16-18
	SI-121	
	SHEET 3 of 5	
REVISIONS:	Added 15" tall route shields for Interstates, U.S. Hwys, & IA Hwys. Added Circle Note 2 to Sheet 4.	
		
APPROVED BY DESIGN METHODS ENGINEER		
FABRICATION - SIGN LEGEND COMPONENTS		

② Yellow sheeted background plaque will not be accepted.

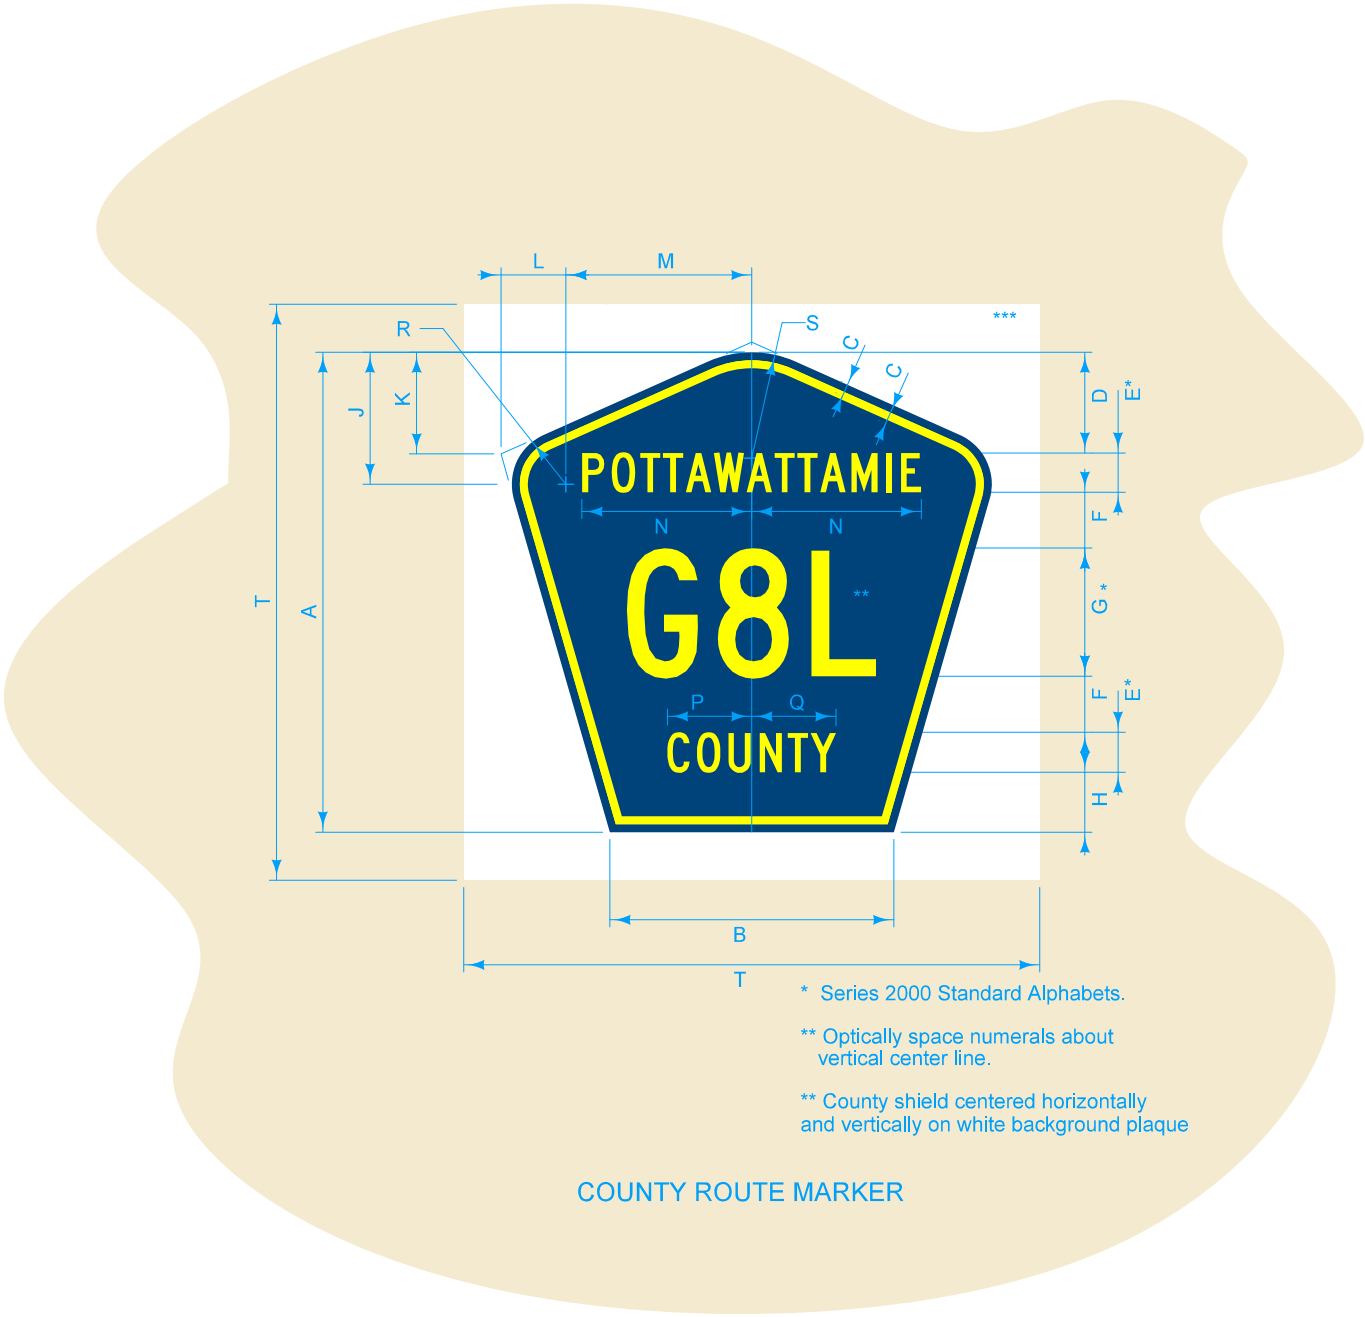

* Series 2000 Standard Alphabets.

** Optically space numerals about vertical center line.


** County shield centered horizontally and vertically on white background plaque

COUNTY ROUTE MARKER

All dimensions are in inches unless otherwise designated.

COLORS:
Text: Yellow
Border: Yellow
Shield: Blue
Background: White

Sign	Height	Bottom Width	Border Thick. & Indent	County Top Offset	County Text Hgt & Font	Numeral Offset	Numeral Height & Font	County Bottom Offset	Radius Vertical Offset	Corner Vertical Offset	Corner Lateral Offset	Radius Lateral Offset	County Name Lt & Rt	County Text Left	County Text Right	Side Radius	Top Radius	Backgrnd Plaque
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T
All Routes	36	21.25	0.5	7	3 C	3	12 C	4	10	6.75	4.75	14	VAR	7.5	7.75	4	10	42



REVISION


4

10-16-18

SI-121


SHEET 4 of 5

REVISIONS: Added 15" tall route shields for Interstates, U.S. Hwys, & IA Hwys. Added Circle Note 2 to Sheet 4.



APPROVED BY DESIGN METHODS ENGINEER


FABRICATION -
SIGN LEGEND COMPONENTS

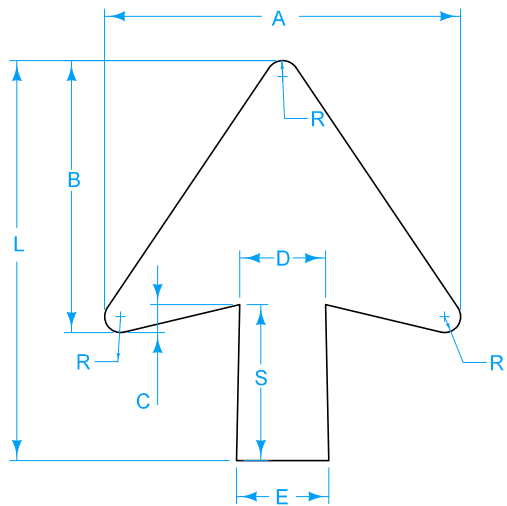


ID	Length	Head Width	Head Length	Draft	Radius	Tip	Shaft Width at Head	Shaft Width at Tail	Shaft Length	Letter Size
	L	A	B	C	R	G	D	E	S	
I-A	17	15.125	11.5625	1.3125	0.8125	Round	3.75	4.03	6.75	8
I-B	25	15.125	11.5625	1.3125	0.8125	Round	3.75	4.36	14.75	8
I-C	20	18.25	14	1.5	0.75	Round	4.5	4.81	7.5	10-13.3
I-D	30	18.25	14	1.5	0.75	Round	4.5	5.23	17.5	10-13.3
I-E	25	22.25	17	1.75	1	Round	5.375	5.78	9.75	16
I-F	35	22.25	17	1.75	1	Round	5.375	6.2	19.75	16

TYPE I

② Type II-A arrows should be used in all typical "down arrow" applications except where not practical due to size constraints.

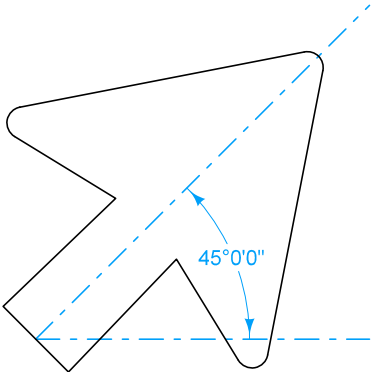

I-E, 45

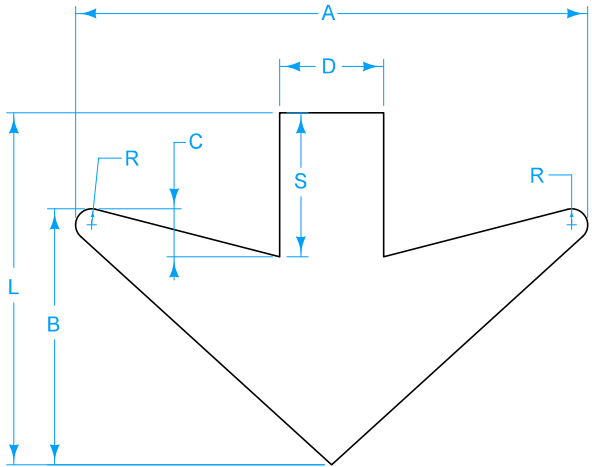


ID	Length	Head Width	Head Length	Draft	Radius	Tip	Shaft Width at Head	Shaft Width at Tail
	L	A	B	C	R	G	D	E
II-B	16	24	12	2.25	0.75	Point	4.875	6.25
II-A	22	32	16	3	1	Point	6.5	9

TYPE II



ARROW DESIGNATION:
Each arrow used on a guide sign is identified by a two part code as follows:
Part 1 is the arrow ID number
Part 2 is the angle in degrees between the center line of the arrow and the horizontal


All dimensions are in inches unless otherwise designated.

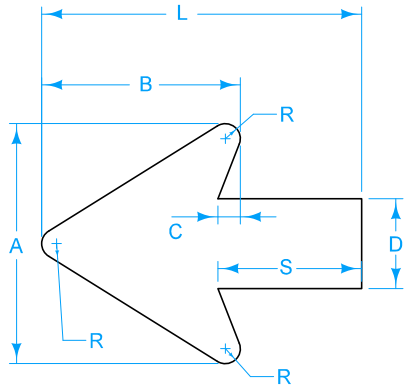


ID	Length	Head Width	Head Length	Draft	Radius	Tip	Shaft Width at Head	Shaft Length
	L	A	B	C	R	G	D	S
III-4S	6	4	3.3125	0.375	0.25	Round	1.5	3.0625
III-4L	12	4	3.3125	0.375	0.25	Round	1.5	9.0625
III-5S	8	5	4.140625	0.46875	0.3125	Round	1.875	4.328
III-5L	12	5	4.140625	0.46875	0.3125	Round	1.875	8.328
III-6S	8	6	4.96875	0.5625	0.375	Round	2.25	3.59375
III-6L	14	6	4.96875	0.5625	0.375	Round	2.25	9.59375
III-8S	10.5	8	6.625	0.75	0.5	Round	3.0	4.625
III-8L	14	8	6.625	0.75	0.5	Round	3.0	8.125

TYPE III

	REVISION	
	4	10-16-18
	SI-121	
SHEET 5 of 5		
REVISIONS: Added 15" tall route shields for Interstates, U.S. Hwys, & IA Hwys. Added Circle Note 2 to Sheet 4.		
 APPROVED BY DESIGN METHODS ENGINEER		
FABRICATION - SIGN LEGEND COMPONENTS		

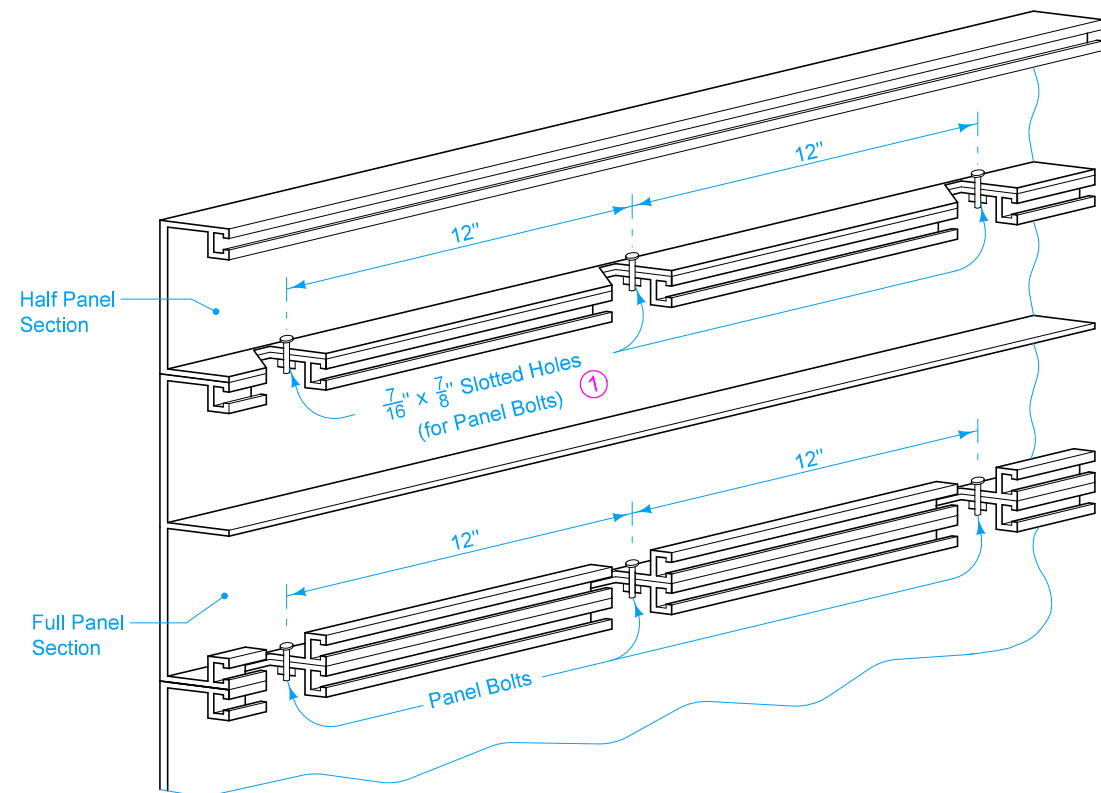


ASSEMBLY DETAIL

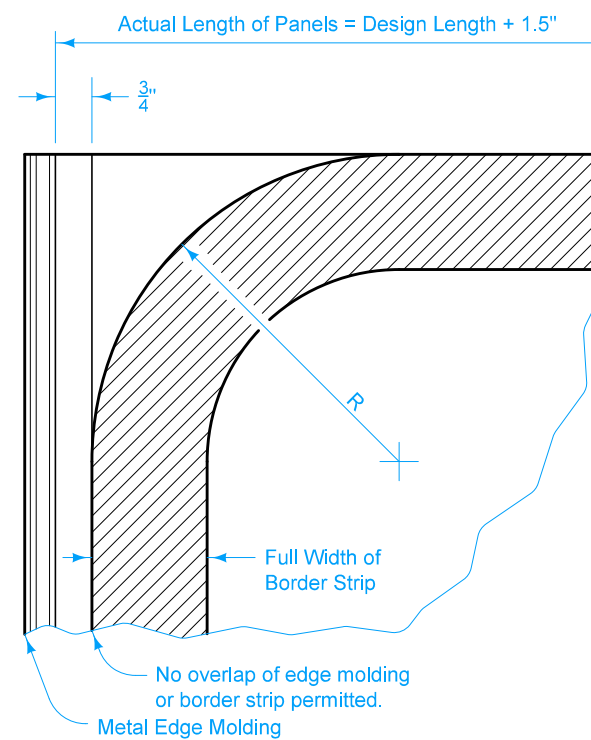


EDGE MOLDING BORDER STRIP DETAIL


Edge molding shall be installed full length of each vertical side of each sign. Attach in accordance with current specifications.

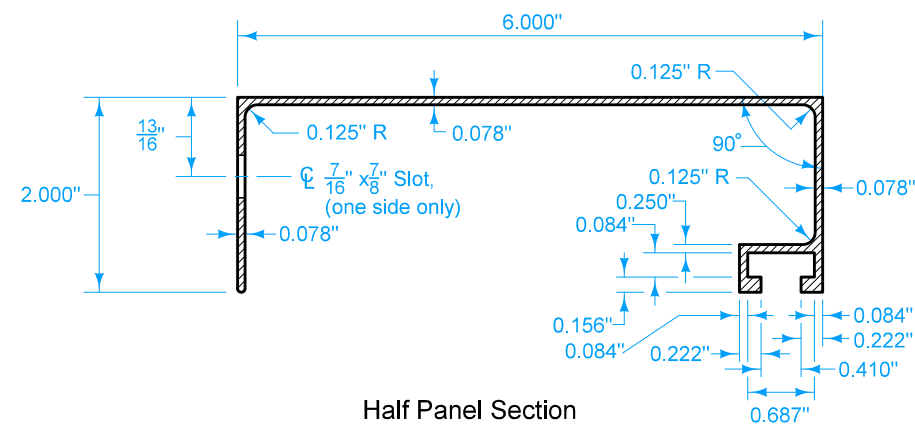

Half Panel Section

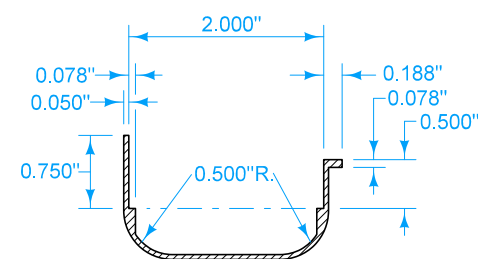

EDGE MOLDING

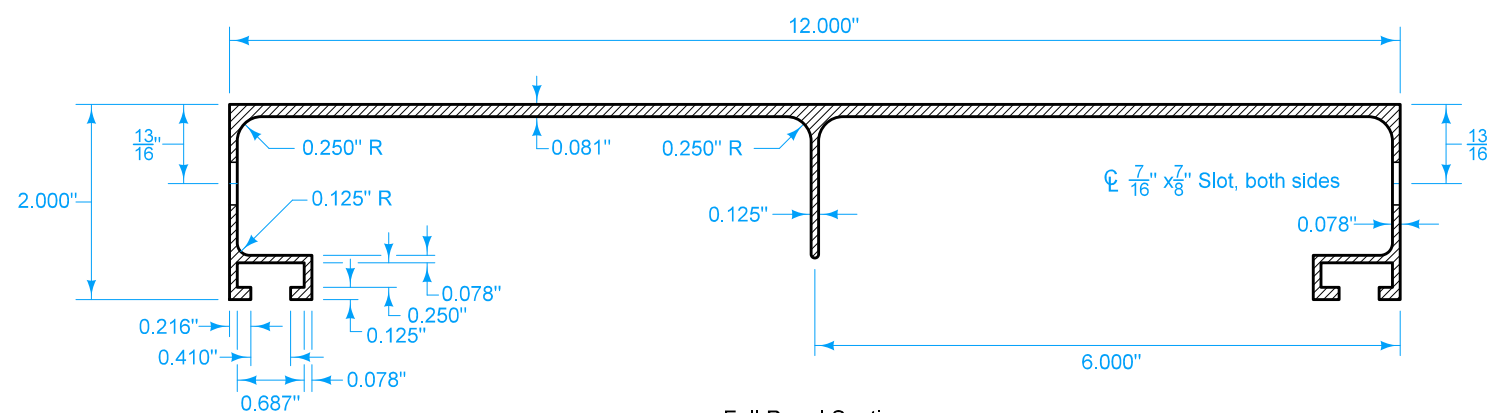

Full Panel Section



STANDARD STRUCTURAL SIGN PANELS


Panel bolt slotted holes spaced at 12 inch centers shall be located along the full length of each panel, such that the outermost slots are of equal distances (not to exceed 6 inches) from the ends of the panel.

Signs shall be made up of full panels unless a half panel is required, in which case it shall be placed at the top edge of the sign.

Refer to detail project plans and summary sheet for exact data for individual sign fabrication requirements.

① Two washers per panel bolt, one each side of sign.


 IOWA DOT	REVISION	
	3	10-20-20
	SI-123	
SHEET 1 of 1		
STANDARD ROAD PLAN		
REVISIONS: Modified dimension from 0.78 to 0.078 in Full Panel Section.		
		
APPROVED BY DESIGN METHODS ENGINEER		
<div>FABRICATION - TYPE 'B' SIGNS</div>		

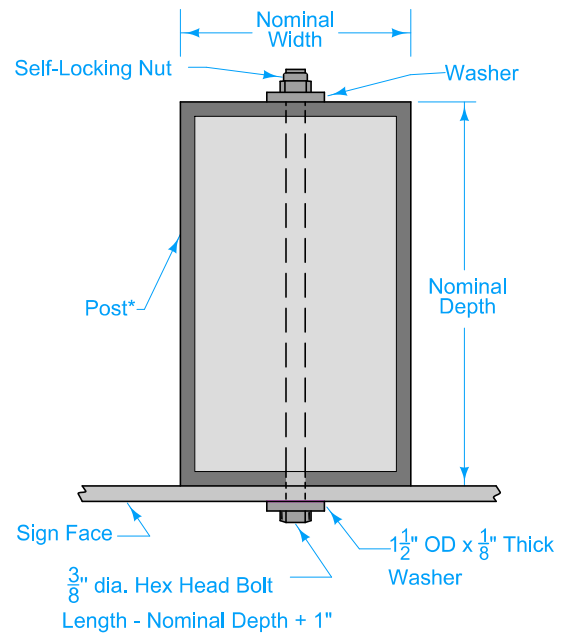


PLAN

*NOTE: Treated Wood or Perforated Square Tube Post


**WOOD OR PERFORATED SQUARE
TUBE POST ATTACHMENT**

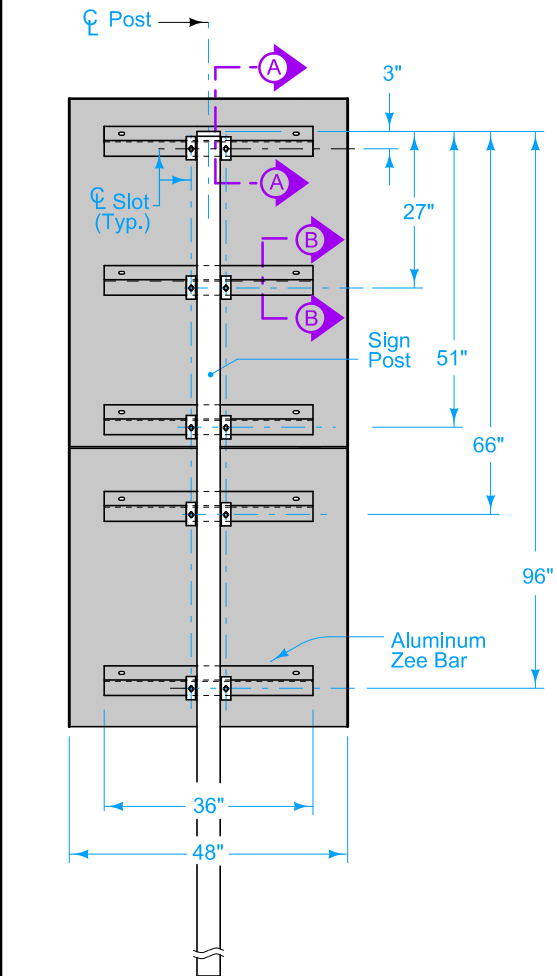


**BACK ELEVATION
4" x 6" RECTANGULAR TUBE
POST ATTACHMENT DETAILS**

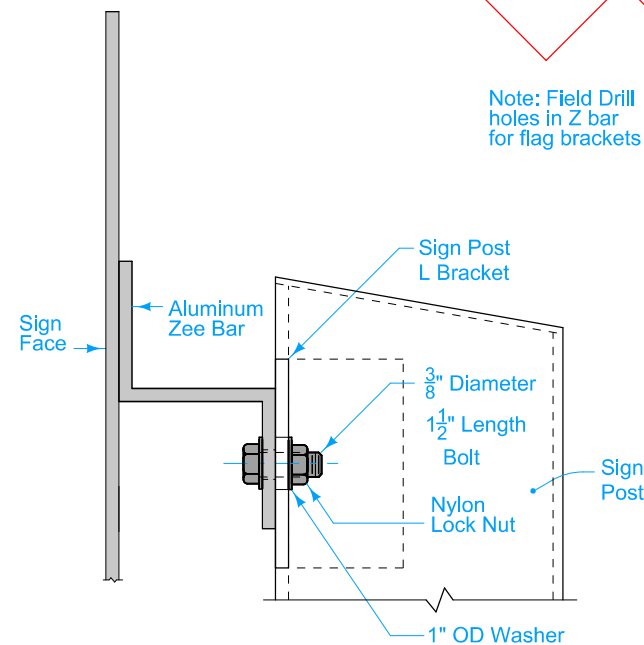


SECTION A-A

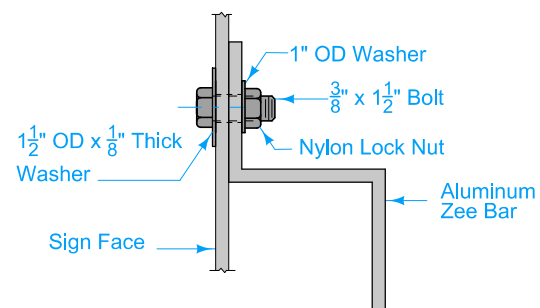

SECTION B-B

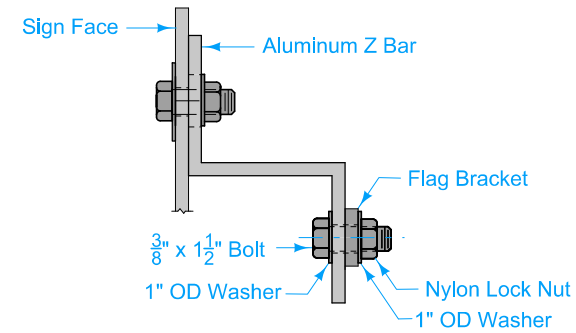


SECTION D-D

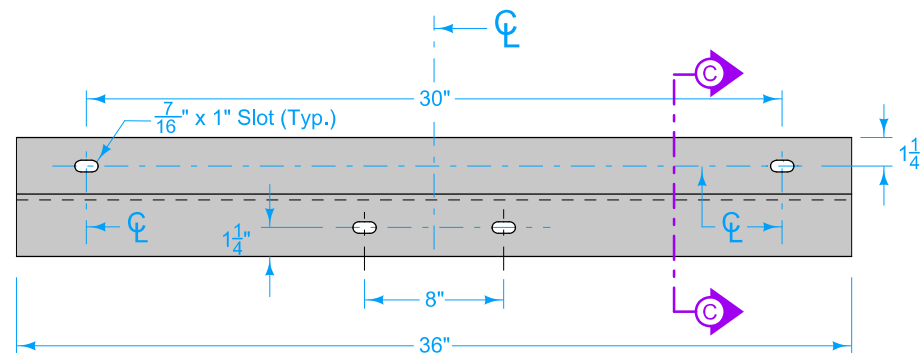


ALUMINUM ZEE BAR

**RECTANGULAR TUBE
POST ATTACHMENT**

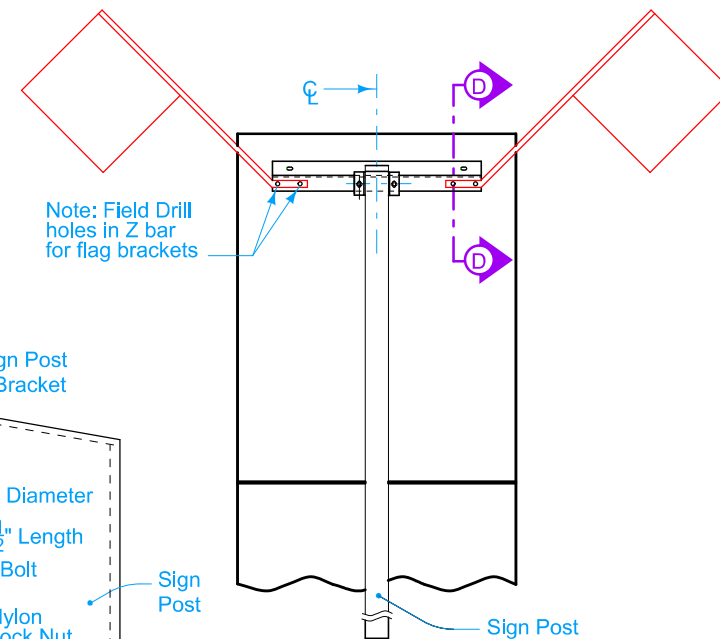

**BACK ELEVATION
ATTACHMENT DETAILS
FOR FLAGS**

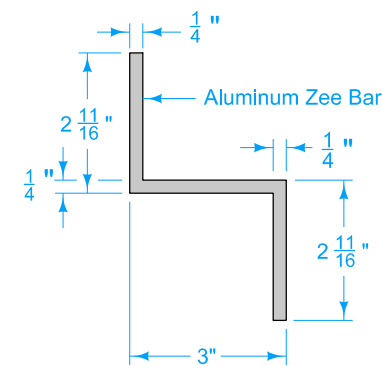


SECTION C-C


Possible Contract Items:
Steel Breakaway Sign Post
Wood Sign Post

IOWA DOT	REVISION	
	4	10-18-16
STANDARD ROAD PLAN		
SHEET 1 of 1		
REVISIONS: Replaced old Iowa DOT logo with new logo.		
APPROVED BY DESIGN METHODS ENGINEER		


**INSTALLATION -
TYPE 'A' SIGNS**

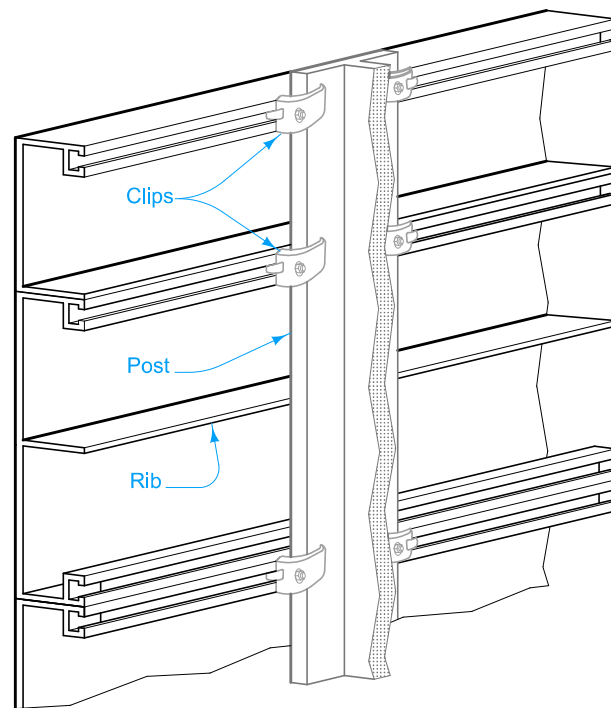


TYPE 1 ATTACHMENT
Type 1 Attachment shall be used for all signs placed on metal breakaway posts.

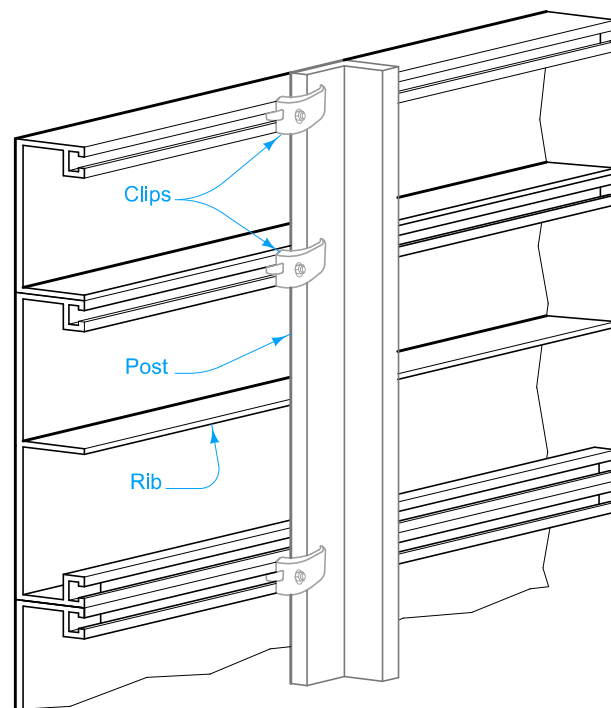


TYPE 4 ATTACHMENT
Type 4 Attachment shall be used for all signs mounted on overhead sign support structures.

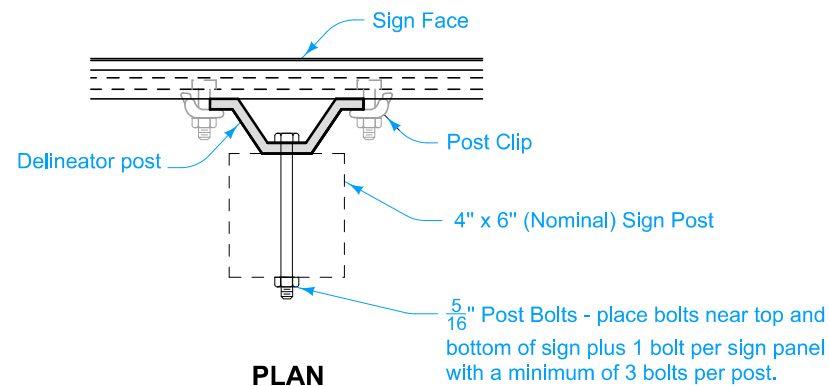


PLAN

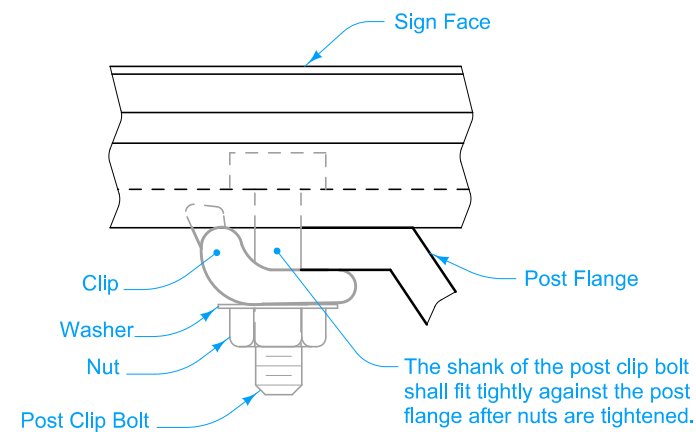


CLIP INSTALLATION

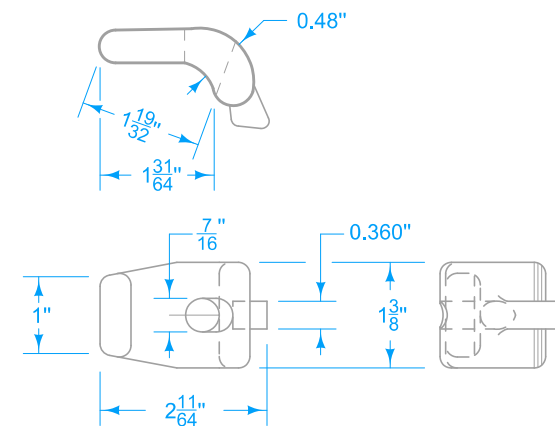

POST CLIP

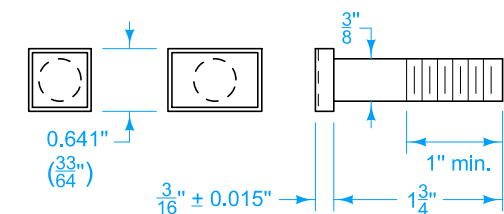

CLIP BOLT
(Square or Rectangulr Head Optional)

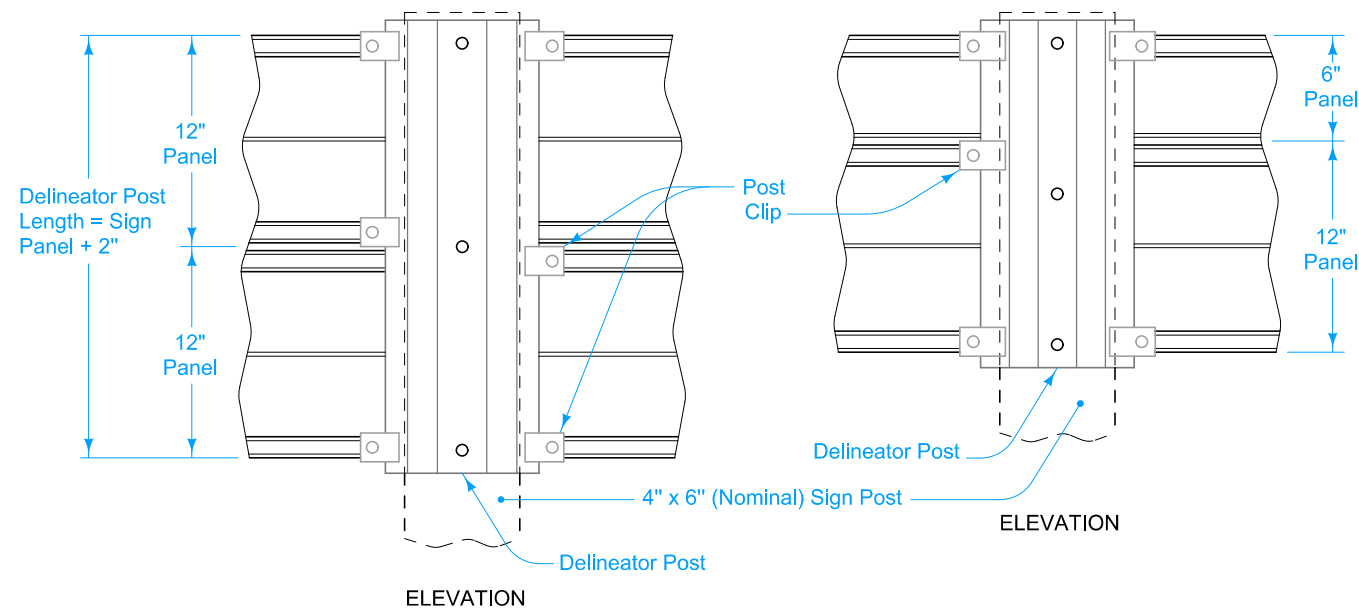

TYPE 3 ATTACHMENT
Use Type 3 Attachment for all signs with wood posts.

Position the EXIT NUMBER PANEL above the guide sign aligned with the edge of the guide sign indicating direction of exit.



If the bolt holes in the top panel and the bottom panel of the two signs line up, panel bolts are to be used.

If the angle fasteners can not be horizontally placed as shown, they can be moved so as to securely hold the top sign.



A post clip is required on each angle at top of panel and each extrusion joint.

The aluminum angles are considered part of the mounting hardware and are to be furnished by the Contractor as an incidental item. No separate payment will be made for aluminum angles.



Use cast aluminum post clips and stainless steel nuts, bolts, and washers for post clips meeting the requirements of Article 4186.09, B of the Standard Specifications.






 IOWA DOT	REVISION	
	4	04-17-18
	SI-132	
	SHEET 1 of 2	
REVISIONS: Added thickness dimension for post clip. Specified material for the post clip, and the nut, bolt, and washer fastening the post clip.		
		
APPROVED BY DESIGN METHODS ENGINEER		
<div>INSTALLATION - TYPE 'B' SIGNS</div>		

- 1 Do not allow the aluminum L to extend below the bottom of the major sign.
- 2 Sign height added above existing supports.

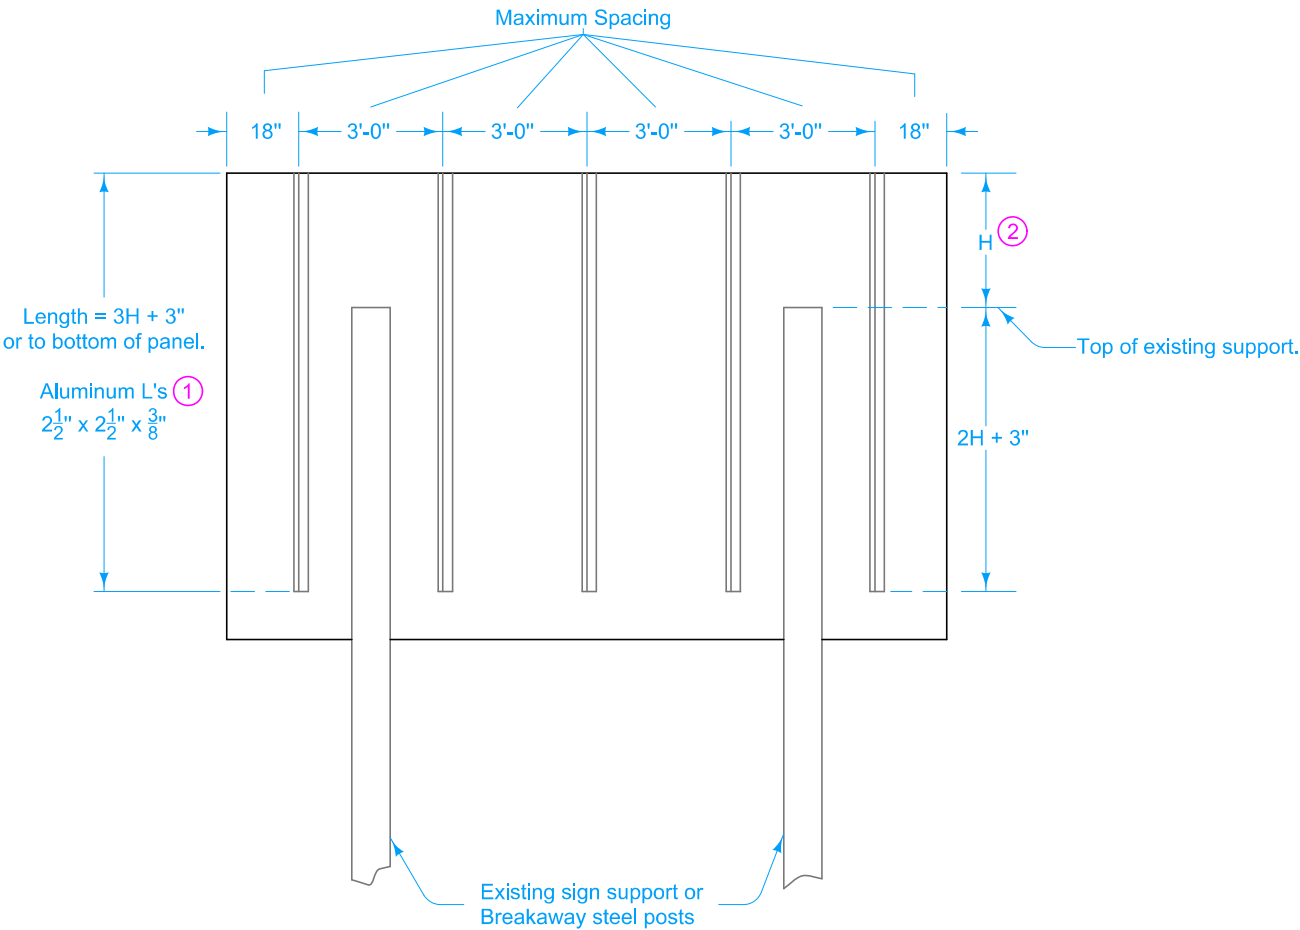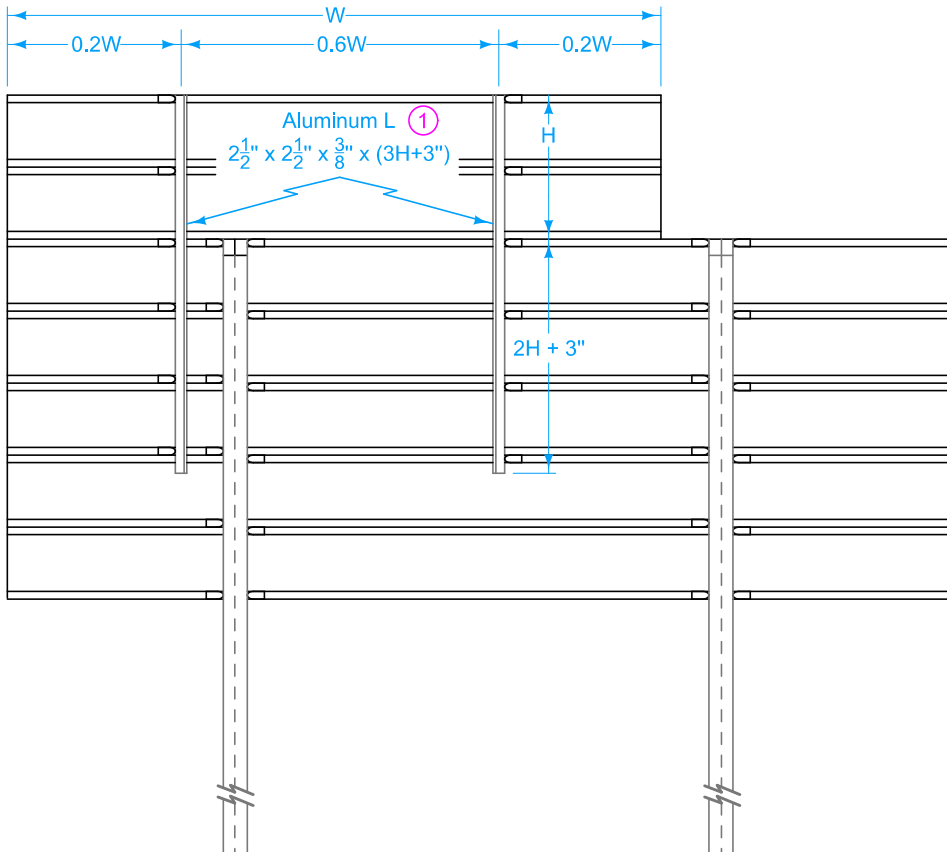


GUIDE SIGNS

 IOWA DOT	REVISION	
	4	04-17-18
	SI-132	
	SHEET 2 of 2	
REVISIONS: Added thickness dimension for post clip. Specified material for the post clip, and the nut, bolt, and washer fastening the post clip.		
		
APPROVED BY DESIGN METHODS ENGINEER		
<div>INSTALLATION - TYPE 'B' SIGNS</div>		

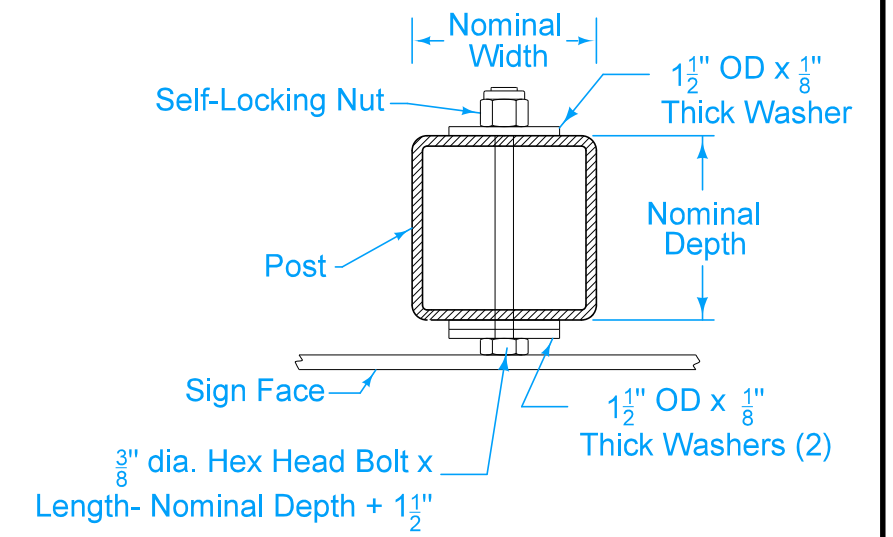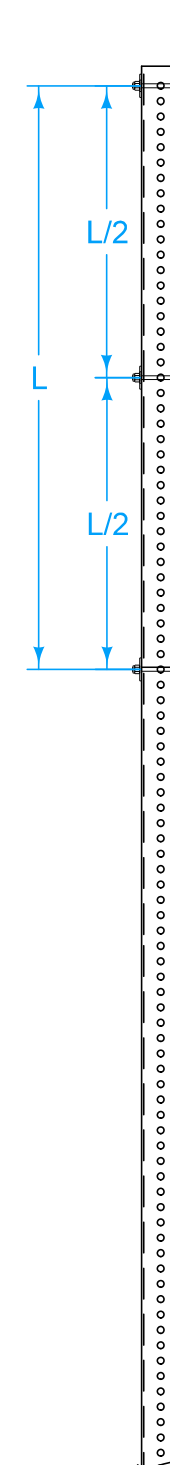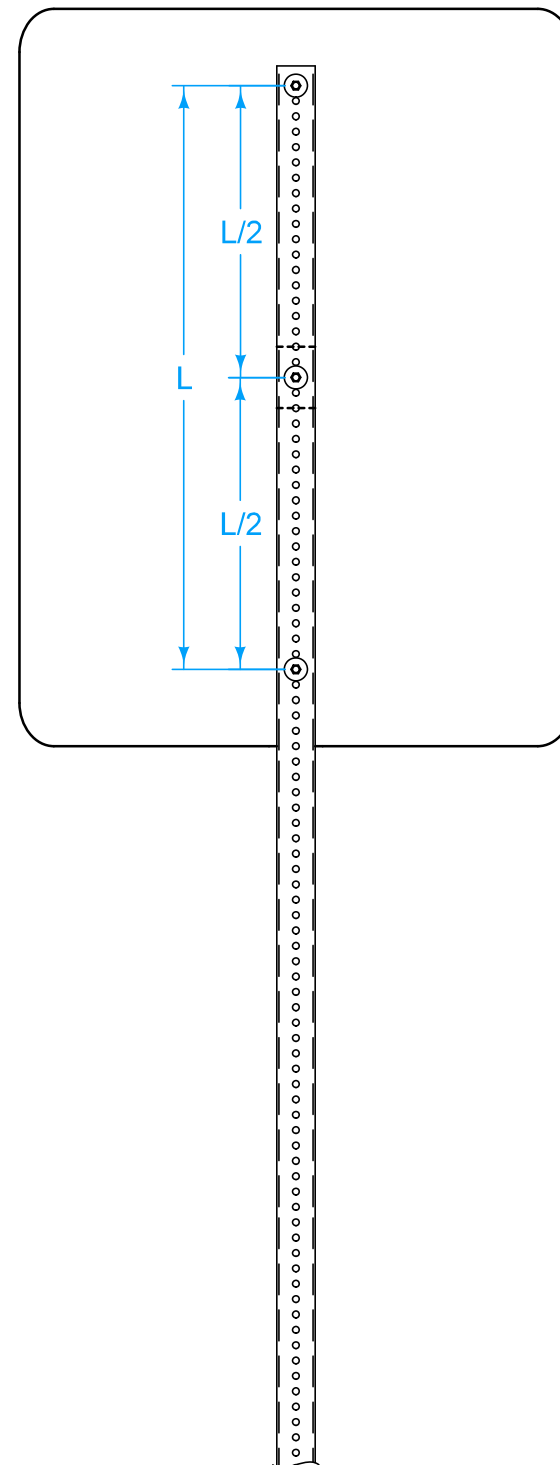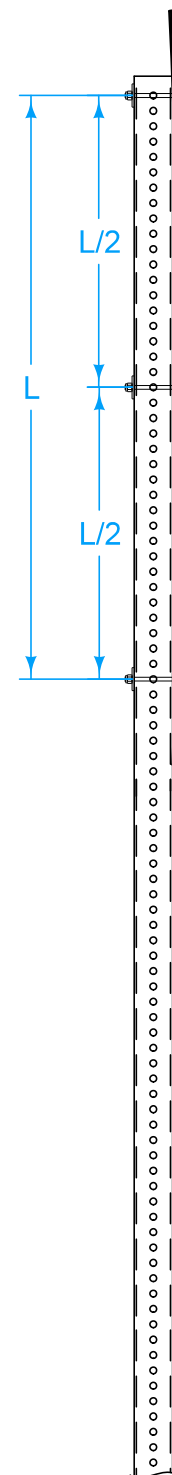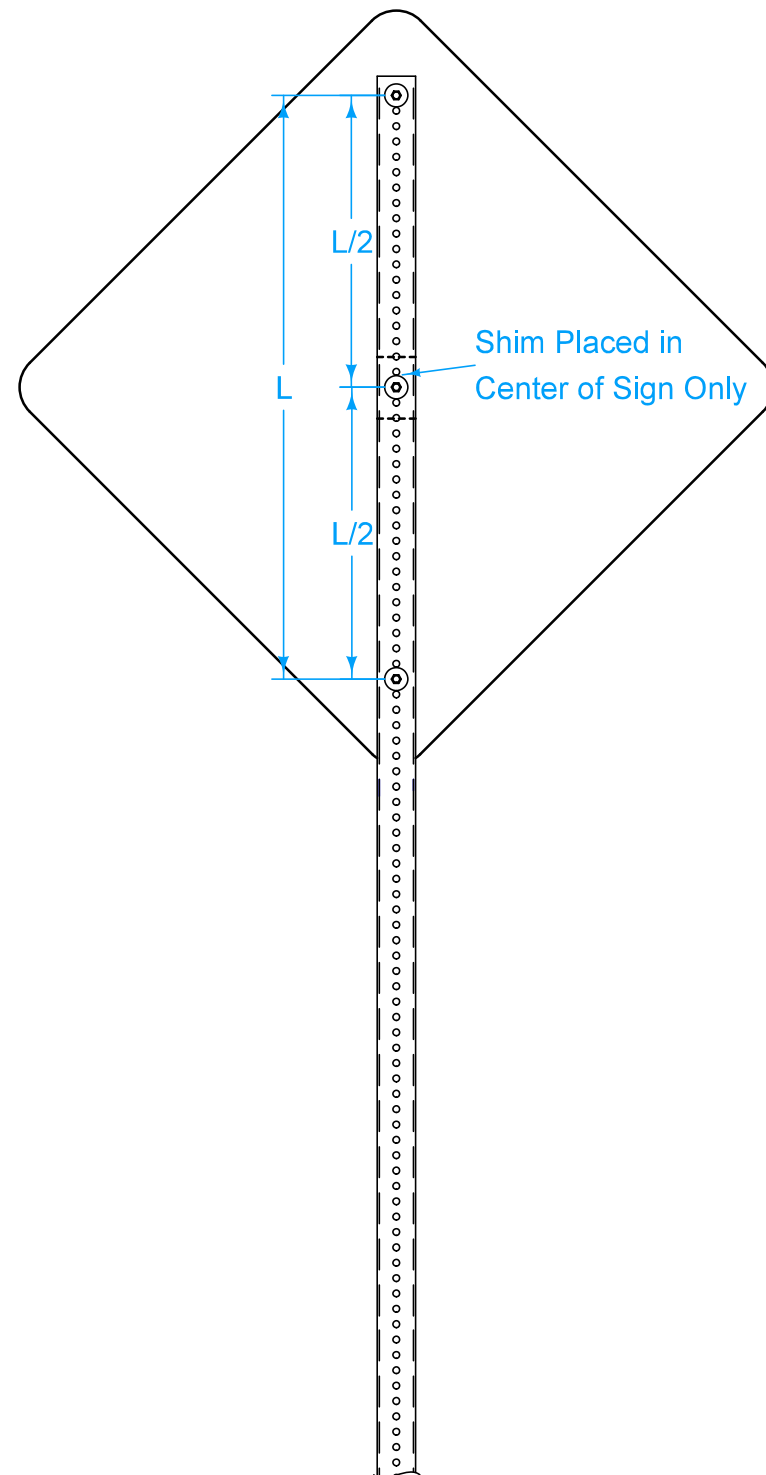

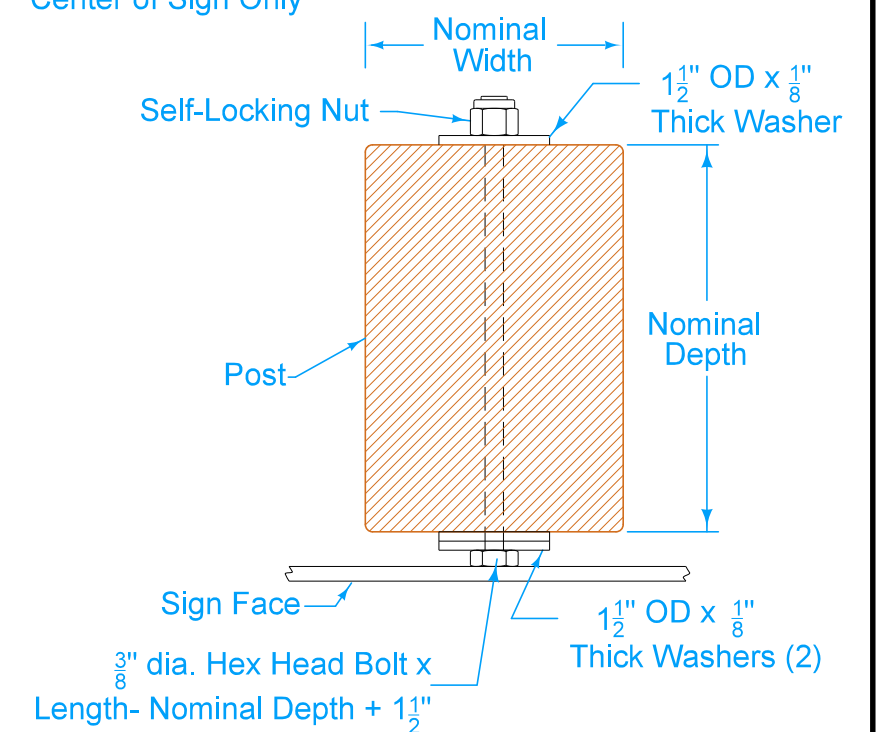


SHIM ATTACHMENT DETAIL
FOR PSST POST




SHIM ATTACHMENT DETAIL
FOR WOOD POST

NOTE: FOR SINGLE POST WITH SIGN WIDTH > 24" AND HEIGHT > 24"
FOR SHEET ALUMINUM SIGNS ONLY


 IOWA DOT	REVISION	
	New	10-17-17
	SI-133	
	SHEET 1 of 1	
STANDARD ROAD PLAN		
REVISIONS: New.		
		
APPROVED BY DESIGN METHODS ENGINEER		
INSTALLATION - TYPE "A" SIGN SHIM		

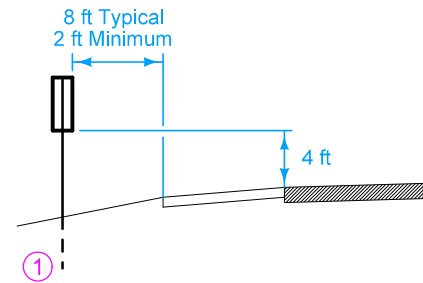


TYPE 1
SHOULDER INSTALLATION

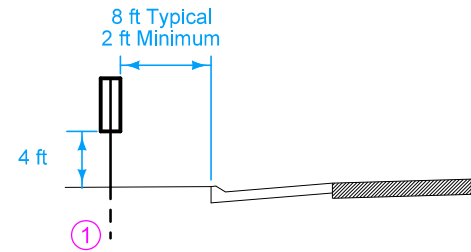


TYPE 2
CURB INSTALLATION

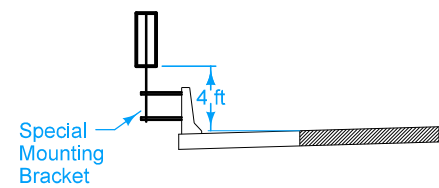


TYPE 3
BRIDGE BARRIER RAIL INSTALLATION

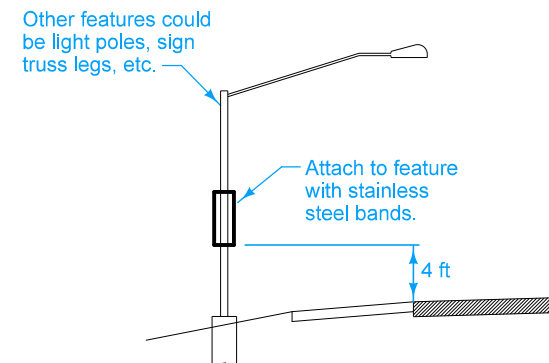


TYPE 4
ATTACHMENT TO OTHER FEATURE

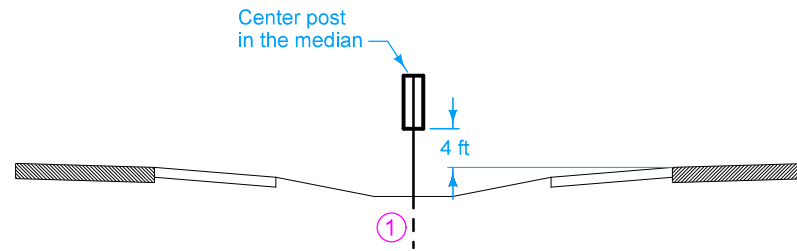


TYPE 5
DEPRESSED MEDIAN INSTALLATION

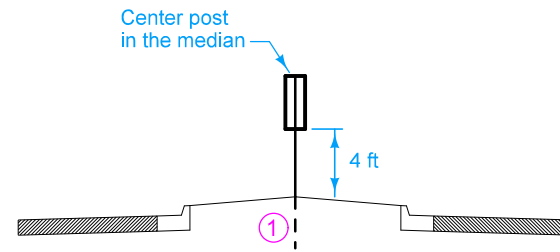

TYPE 6
RAISED MEDIAN INSTALLATION

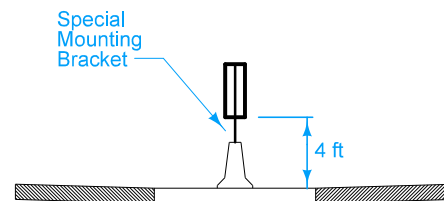

TYPE 7
FULL MEDIAN BARRIER RAIL INSTALLATION

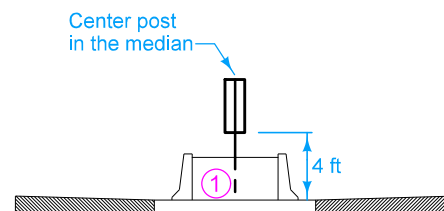


TYPE 8
SPLIT MEDIAN BARRIER RAIL INSTALLATION

Furnish Type 1 delineator posts for each location unless specified otherwise in the plans.

$\frac{3}{8}$ " or $\frac{7}{16}$ " holes in delineators are acceptable.


All dimensions are in inches unless otherwise designated.

- ① Install post of sufficient length to provide a minimum of 30 inches of embedment when installed at the specified mounting height.

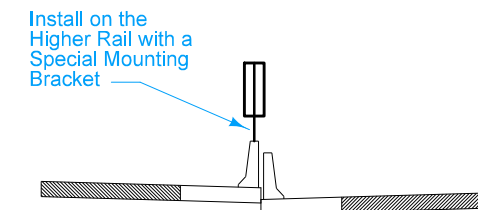




TYPE 9
SPLIT MEDIAN BARRIER RAIL INSTALLATION
WITH GRADE DIFFERENTIAL

Hot dipped galvanized steel bolts, self-locking nuts, and washers.
 $\frac{5}{16}$ " x $2\frac{1}{4}$ " - 18 NC hex bolts and hex selflocking nuts with washers
 $\frac{11}{32}$ " I.D. x $\frac{11}{16}$ " O.D. x 0.091".

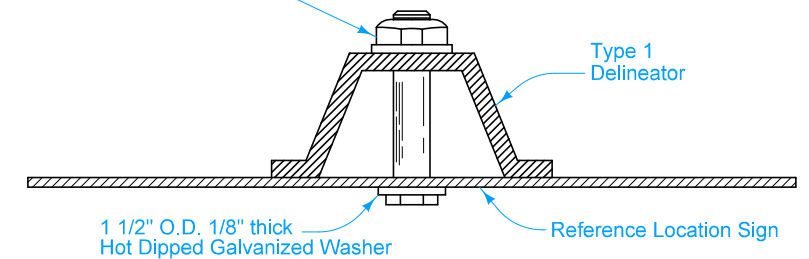


REFERENCE LOCATION SIGN ASSEMBLY
TOP VIEW

 IOWA DOT	REVISION	
	3	04-18-17
	SI-171	
	SHEET 1 of 4	
REVISIONS: Changed title and "milepost" to new Reference Location Sign naming.		
		
APPROVED BY DESIGN METHODS ENGINEER		
REFERENCE LOCATION SIGN POSTS		

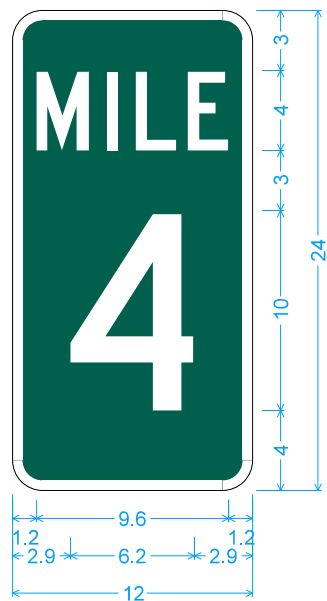


D10-1A;
1.50" Radius, 0.50" Border, White on Green;
[MILE] C 2K;
[4] C 2K;

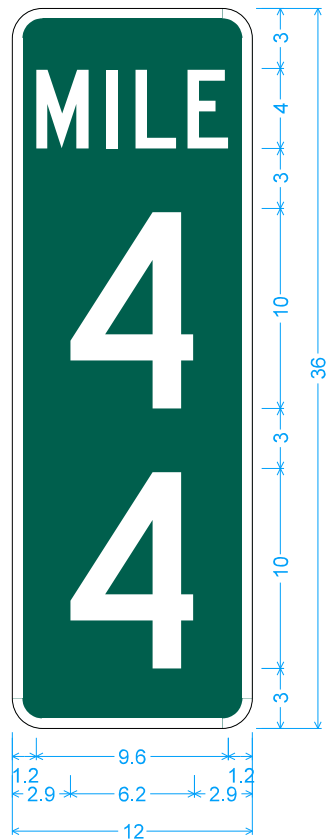


D10-2A;
1.50" Radius, 0.50" Border, White on Green;
[MILE] C 2K;
[4] C 2K; [4] C 2K;




D10-3A;
1.50" Radius, 0.50" Border, White on Green;
[MILE] C 2K;
[4] C 2K; [4] C 2K;
[4] C 2K;




D10-5A;
1.50" Radius, No border, White on Black;




1.50" Radius, No border, White on Black;
Rounded Rectangle 5.75" Radius;





D10-7A;
1.50" Radius, 0.50" Border, White on Green;
[A] E 2K;




D10-8A;
1.50" Radius, 0.50" Border, White on Green;
[AH] C 2K;




D10-9A;
1.50" Radius, 0.50" Border, White on Green;
[BK] C 2K;


 IOWA DOT	REVISION	
	3	04-18-17
	SI-171	
STANDARD ROAD PLAN	SHEET 2 of 4	
	REVISIONS: Changed title and "milepost" to new Reference Location Sign naming.	
		
APPROVED BY DESIGN METHODS ENGINEER		
REFERENCE LOCATION SIGN POSTS		

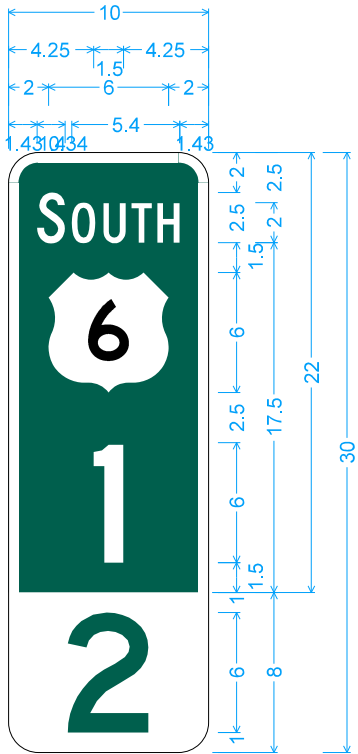



2.96 4.08 2.96
D10-1D;
1.50" Radius, 0.50" Border, White on Green;
[SOUTH] C 2K;
[1] D 2K;
1.50" Radius, No border, Green on White;
[2] D 2K;

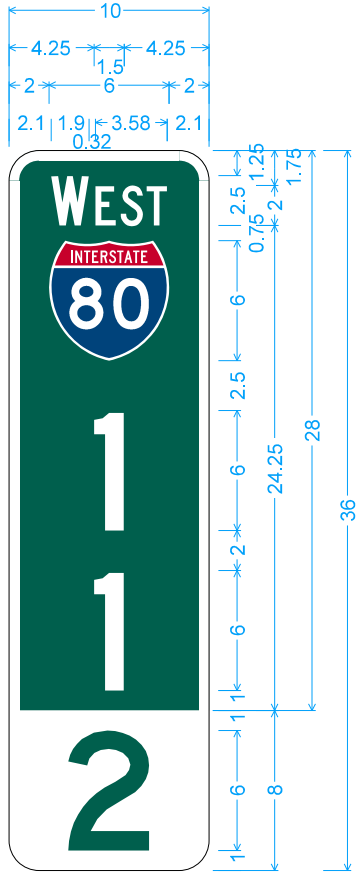


2.96 4.08 2.96
D10-2D;
1.50" Radius, 0.50" Border, White on Green;
[WEST] C 2K;
[1] D 2K;
[1] D 2K;
1.50" Radius, No border, Green on White;
[2] D 2K;

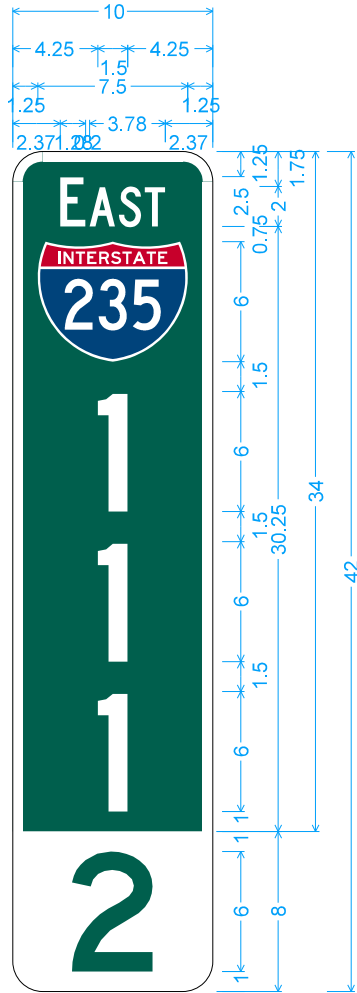


2.96 4.08 2.96
D10-3D;
1.50" Radius, 0.50" Border, White on Green;
[EAST] C 2K;
[1] D 2K;
[1] D 2K;
[1] D 2K;
1.50" Radius, No border, Green on White;
[2] D 2K;


 IOWA DOT	REVISION	
	3	04-18-17
	SI-171	
	SHEET 3 of 4	
REVISIONS: Changed title and "milepost" to new Reference Location Sign naming.		
		
APPROVED BY DESIGN METHODS ENGINEER		
REFERENCE LOCATION SIGN POSTS		

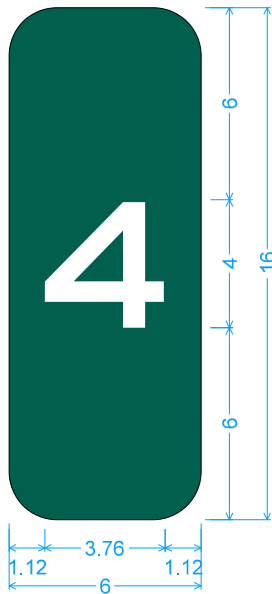


D10-1;
1.50" Radius, No border, White on Green;
[4] E 2K;

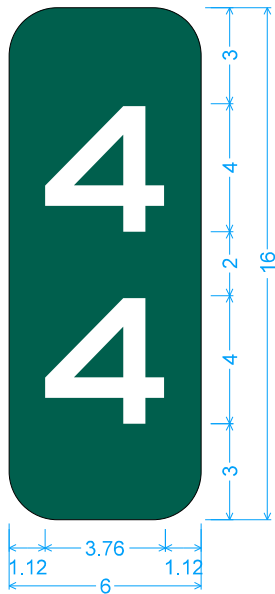


D10-2;
1.50" Radius, No border, White on Green;
[4] E 2K;
[4] E 2K;

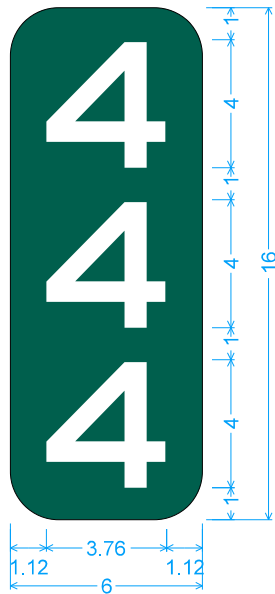


D10-3;
1.50" Radius, No border, White on Green;
[4] E 2K;
[4] E 2K;
[4] E 2K;




D10-5;
1.50" Radius, No border, White on Black;




D10-6;
1.50" Radius, No border, White on Black;
State Highway 92 M1-5;




D10-7;
1.50" Radius, No border, White on Green;
[A] E 2K;




D10-8;
1.50" Radius, No border, White on Green;
[AH] C 2K;




D10-9;
1.50" Radius, No border, White on Green;
[BK] C 2K;





0.50" Radius, No border, White on Green;
[A] E 2K;




0.50" Radius, No border, White on Green;
[AH] C 2K;




0.50" Radius, No border, White on Green;
[BK] C 2K;

 IOWA DOT	REVISION	
	3	04-18-17
	SI-171	
STANDARD ROAD PLAN	SHEET 4 of 4	
REVISIONS: Changed title and "milepost" to new Reference Location Sign naming.		
		
APPROVED BY DESIGN METHODS ENGINEER		
REFERENCE LOCATION SIGN POSTS		

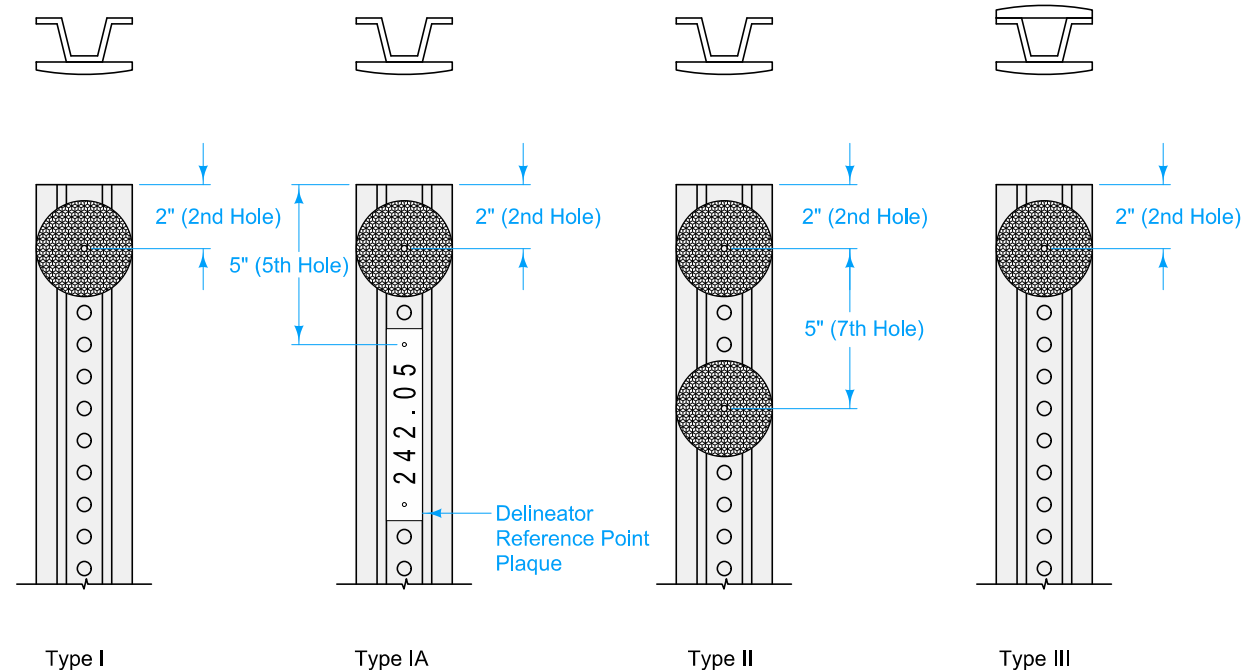

RIGID DELINEATOR MOUNTINGS

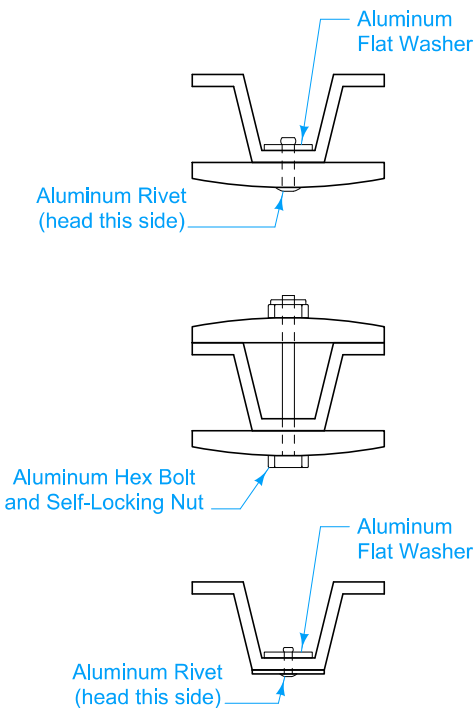

ATTACHMENTS

Place delineators at a constant distance from the edge of traveled way and/or the edge of shoulder.

The delineator height is measured from the edge of traveled way or the face of curb.

When placed behind curb, the delineator offset is measured from the face of curb. Allowable offsets are 2 feet minimum and 8 feet maximum. If the curb is part of a shoulder, maintain at least a minimum 8 foot offset from the edge of traveled way.

When placed on the foreslope, the delineator offset is measured from the edge of shoulder. Allowable offsets are 2 feet minimum and 8 feet maximum. However, for shoulders less than 6 feet in width, maintain a minimum 8 feet to the edge of traveled way.

Refer to the project plans for specific offset dimensions.

Furnish white, yellow, and/or red reflectors as specified in the project plans.

Furnish Type I delineator posts. Post lengths are to be sufficient to ensure the proper installation height and provide a minimum of 2'-6" embedment. See Table I for post lengths for various slope and offset conditions.

3/8" or 7/16" holes in the delineators are acceptable.

Install delineators truly vertical.

Delineators placed along freeways and expressways are to be spaced every 0.05 mile along the thru roadway. Placements are based on the reference post marker. A Delineator Reference Point Plaque is required on each delineator for both directions of travel.

Fabricate plaques from 0.063 inch thick sheet aluminum of the appropriate dimensions. Use non-reflectORIZED sheeting. White for the background, and black for the numerals.

Attach single reflectors to the post with an aluminum, brazier head, blind rivet of $\frac{3}{16}$ inch diameter and a grip range of 0.376 to 0.625 inches, and an aluminum flat washer of 0.193 in. ID x 0.750 in. OD x 0.091 in. thickness.

Attach back to back reflectors to the post with an aluminum $\frac{3}{16}$ in. dia x 2 $\frac{1}{2}$ in. length hex head bolt with a matching self-locking nut.


Attach plaques to the post with an aluminum, brazier head, blind rivet of $\frac{1}{8}$ inch diameter and a grip range of 0.126 to 0.250 inches, and an aluminum flat washer of 0.129" ID x 0.750" OD x 0.091" thickness.

Furnish materials complying with Section 4186 of the Standard Specifications.


Possible Contract Items:
Delineator, Rigid - Type I
Delineator, Rigid - Type IA
Delineator, Rigid - Type II
Delineator, Rigid - Type III

Possible Tabulation:
190-25

Post Lengths for Shoulder Installation						
Offset ft	Foreslope Rate (FS:1)					
	10:1	6:1	4:1	3:1	2:1	
2	8	8	8	8	8	
4	8	8	8	10	10	
6	8	8	10	10	10	
8	8	10	10	10	12	

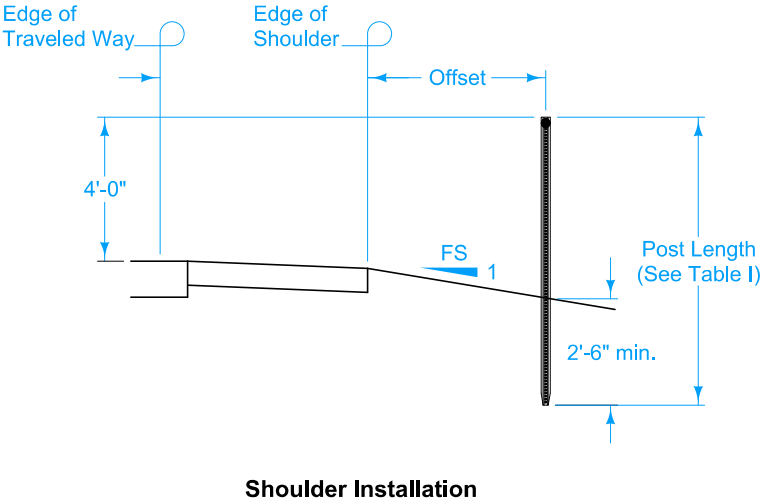


Shoulder Installation

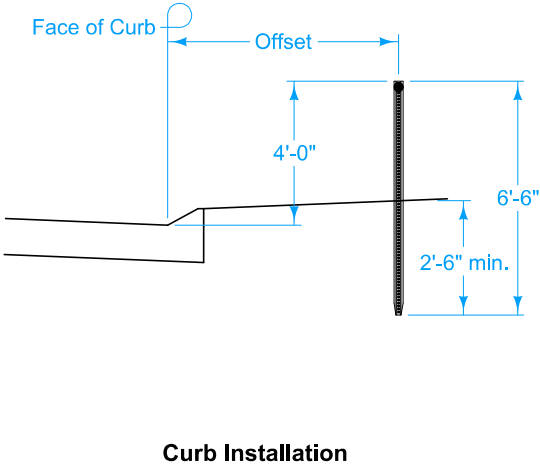




Curb Installation

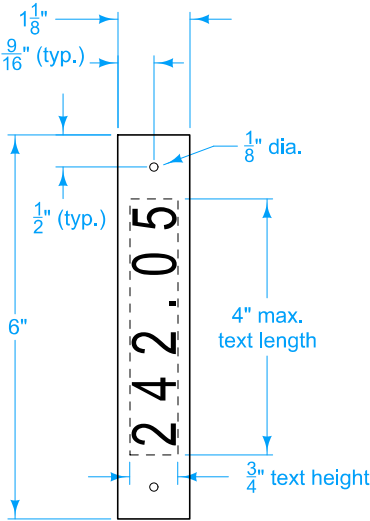DELINEATOR POST LOCATIONS




DELINEATOR REFERENCE POINT PLAQUE

 STANDARD ROAD PLAN	REVISION	
	3	04-19-16
	SI-172	
SHEET 1 of 1		
REVISIONS: Widened general notes column to add possible contract items and possible tabulation.		
 APPROVED BY DESIGN METHODS ENGINEER		
DELINEATORS		

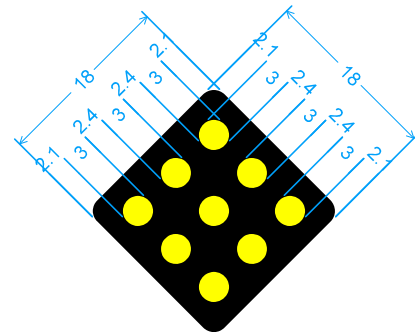


OM1-2;
1.5" Radius, No border, Black

TYPE 1 OBJECT MARKER

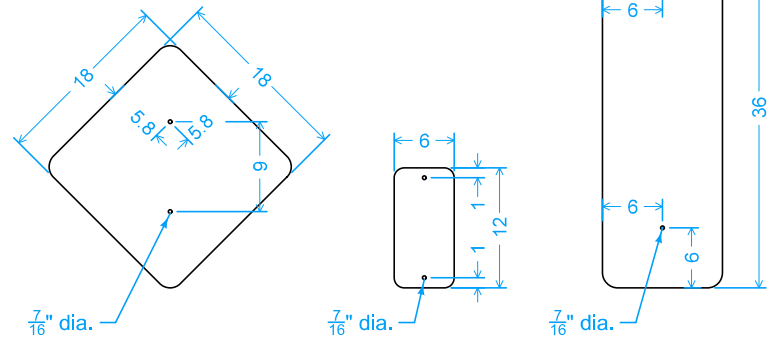


SIGN BLANKS




OM2-2;
1" Radius, No border, Yellow


TYPE 2 OBJECT MARKER

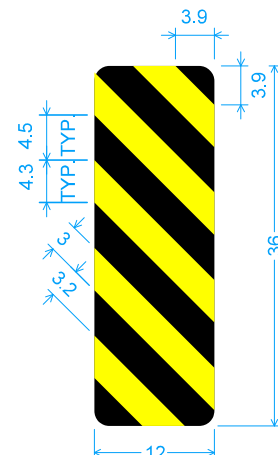

OM3-L;
1.5" Radius, No border,
Black, Yellow Diagonal

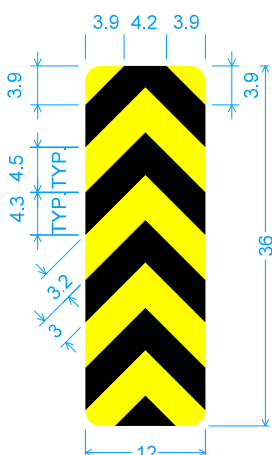


OM3-C;
1.5" Radius, No border,
Black, Yellow Diagonal

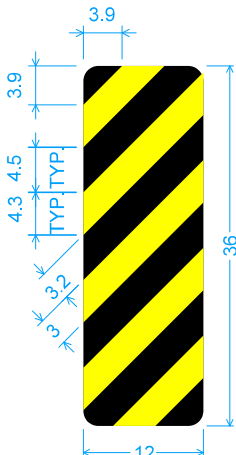

OM3-R;
1.5" Radius, No border,
Black, Yellow Diagonal

TYPE 3 OBJECT MARKERS

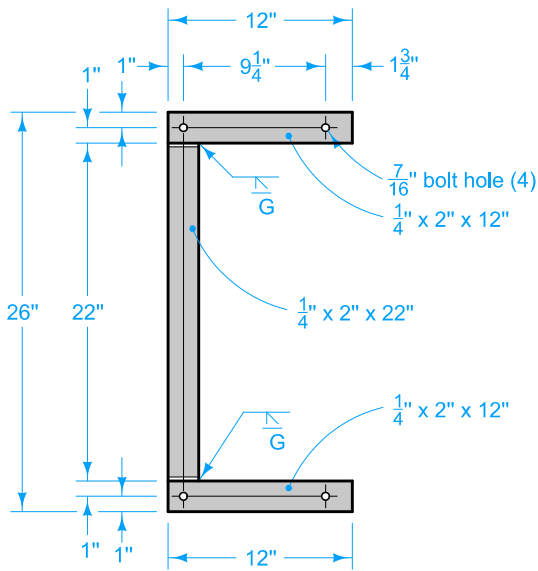

OFFSET BRACKET
Galvanize in accordance with AASHTO M 111.

Fabricate object markers from materials complying with Section 4186 of the Standard Specifications.



Buttons on Type 1 Object Markers may consist of yellow reflectors or yellow reflective sheeting. Do not mix types on any single object marker. When reflectors are used, attach to sign blank with an aluminum, brazier head, blind rivet of $\frac{3}{16}$ inch diameter and a grip range of $\frac{1}{8}$ to $\frac{3}{8}$ inches.


Install object markers truly vertical.

Ensure top of post does not extend above top of object marker.


Possible Contract Item:
Object Marker

Possible Tabulation:
190-25

 IOWA DOT	REVISION	
	1	04-19-16
	SI-173	
	SHEET 1 of 2	
REVISIONS:	Removed OM1-1, OM1-3, and .063" aluminum call out on page 1. Modified general notes, drawing labels, and changed dimensions to 1 pt of accuracy.	
		
APPROVED BY DESIGN METHODS ENGINEER		
OBJECT MARKERS		

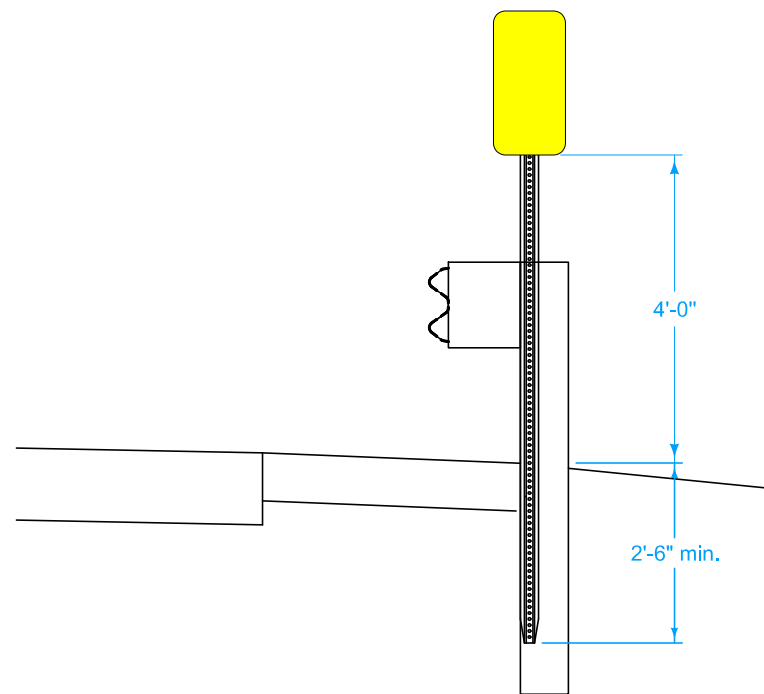


TYPE 2

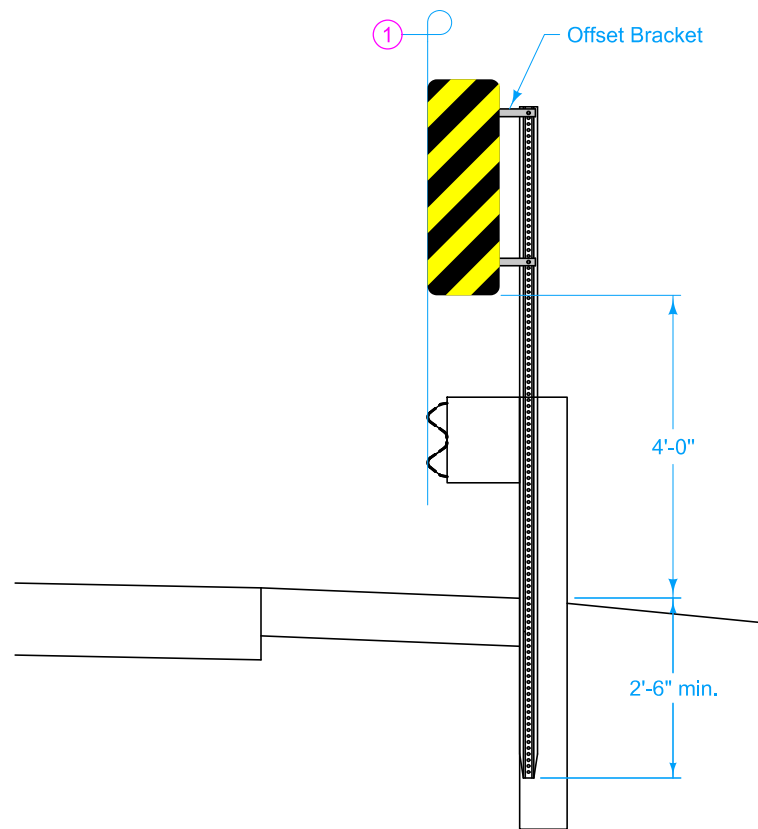


TYPE 3

INSTALLATION AT GUARDRAIL LOCATIONS

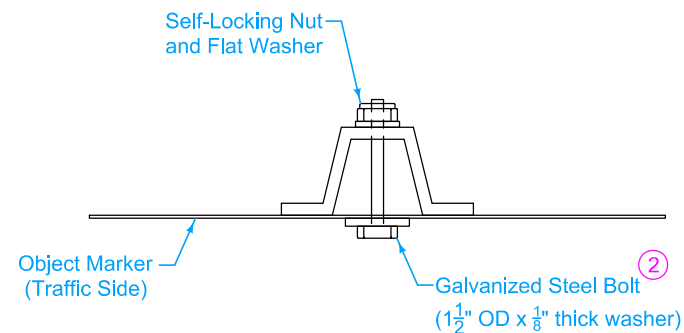

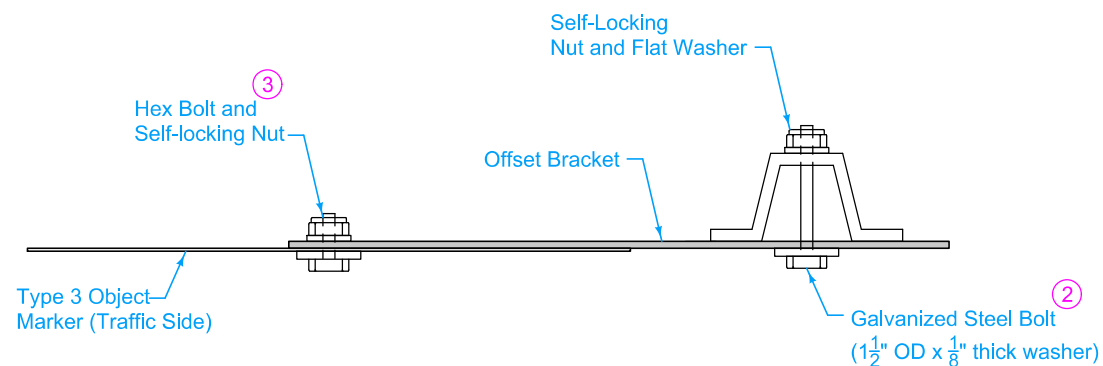


STANDARD ATTACHMENT




OFFSET BRACKET ATTACHMENT

- ① Install Type 3 Object Markers so the inside edge of the marker is in line with the inner edge of the obstruction.
- ② Attach object marker or offset bracket to the delineator post at two locations. Use the following per bolt hole location:
 - one galvanized $\frac{5}{16}$ in. dia x $2\frac{1}{4}$ in. length hex head bolt with matching self locking nut.
 - galvanized steel washer, $\frac{11}{32}$ " ID, $1\frac{1}{2}$ " OD, $\frac{1}{8}$ " thick under the head of the bolt.
- ③ When Type 3 Object Marker is installed on an offset bracket, attach marker to bracket at two locations. Use the following per bolt hole location:
 - one $\frac{5}{16}$ in. dia x $1\frac{1}{2}$ in. length hex head bolt with matching self locking nut.
 - galvanized steel washer, $\frac{11}{32}$ " ID, $1\frac{1}{2}$ " OD, $\frac{1}{8}$ " thick under the head of the bolt.


 IOWA DOT		REVISION	
		1	04-19-16
STANDARD ROAD PLAN		SI-173	
		SHEET 2 of 2	
REVISIONS:	Removed OM1-1, OM1-3, and .063" aluminum call out on page 1. Modified general notes, drawing labels, and changed dimensions to 1 pt of accuracy.		
			
APPROVED BY DESIGN METHODS ENGINEER			
OBJECT MARKERS			

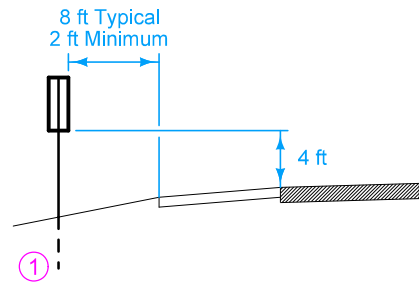


TYPE 1
SHOULDER INSTALLATION

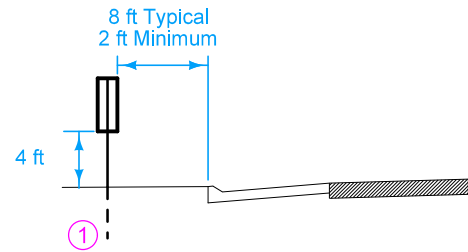


TYPE 2
CURB INSTALLATION

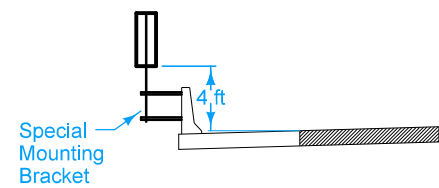


TYPE 3
BRIDGE BARRIER RAIL INSTALLATION

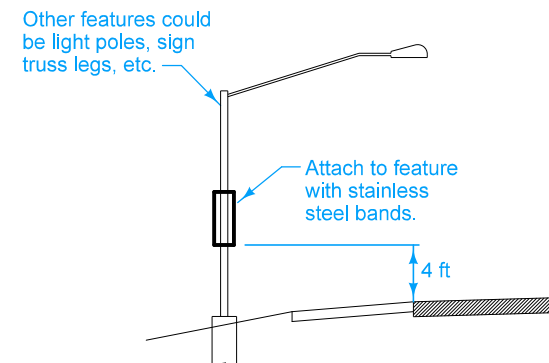


TYPE 4
ATTACHMENT TO OTHER FEATURE

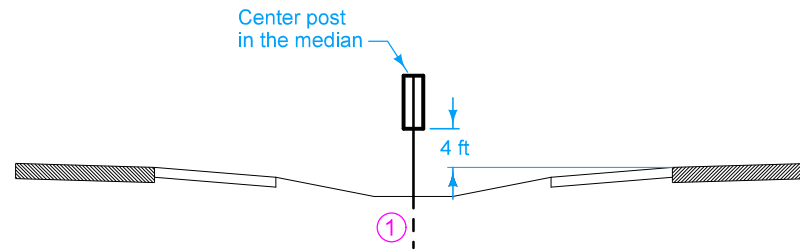


TYPE 5
DEPRESSED MEDIAN INSTALLATION

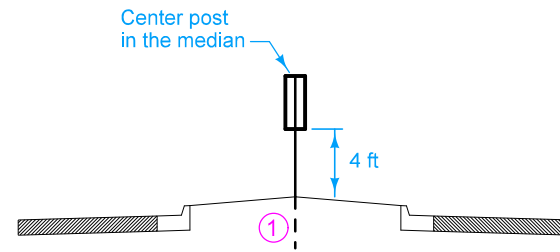

TYPE 6
RAISED MEDIAN INSTALLATION

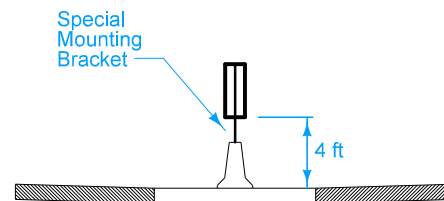

TYPE 7
FULL MEDIAN BARRIER RAIL INSTALLATION

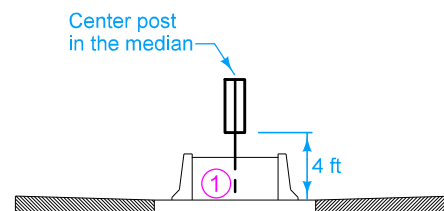


TYPE 8
SPLIT MEDIAN BARRIER RAIL INSTALLATION

Furnish Type 1 delineator posts for each location unless specified otherwise in the plans.

$\frac{3}{8}$ " or $\frac{7}{16}$ " holes in delineators are acceptable.


All dimensions are in inches unless otherwise designated.

① Install post of sufficient length to provide a minimum of 30 inches of embedment when installed at the specified mounting height.

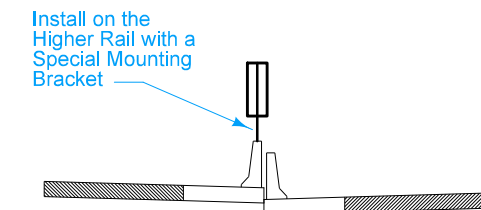




TYPE 9
SPLIT MEDIAN BARRIER RAIL INSTALLATION
WITH GRADE DIFFERENTIAL

Hot dipped galvanized steel bolts, self-locking nuts, and washers.
 $\frac{5}{16}$ " x $2\frac{1}{4}$ " - 18 NC hex bolts and hex selflocking nuts with washers
 $\frac{11}{32}$ " I.D. x $\frac{11}{16}$ " O.D. x 0.091".

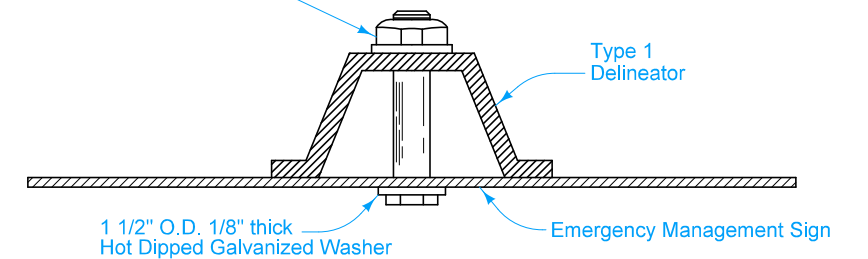


EMERGENCY MANAGEMENT SIGN ASSEMBLY
TOP VIEW


 IOWA DOT	REVISION	
	New	04-21-20
	SI-174	
STANDARD ROAD PLAN		SHEET 1 of 2
REVISIONS: New.		
		
APPROVED BY DESIGN METHODS ENGINEER		
EMERGENCY MANAGEMENT RAMP SIGNING		

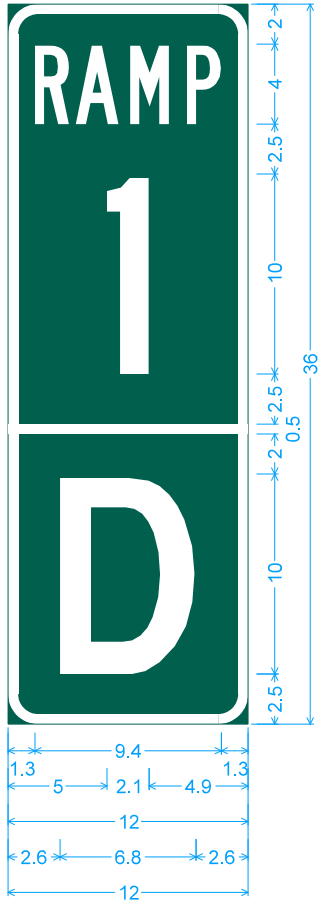

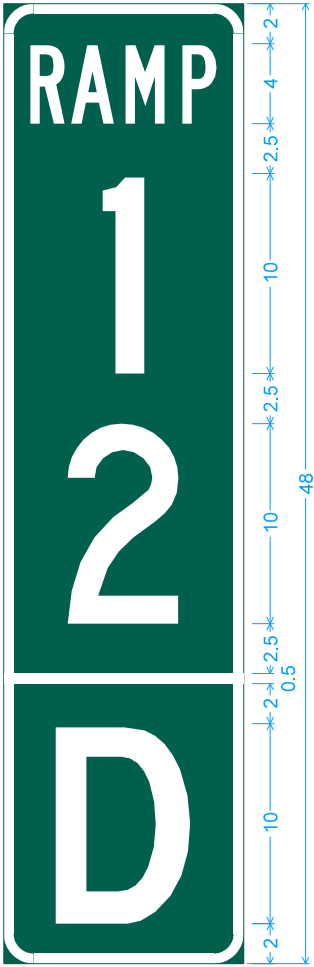

1.5" Radius, 0.5" Border, White on Green;
[RAMP] B 2K;
[1] C 2K; [D] D 2K;

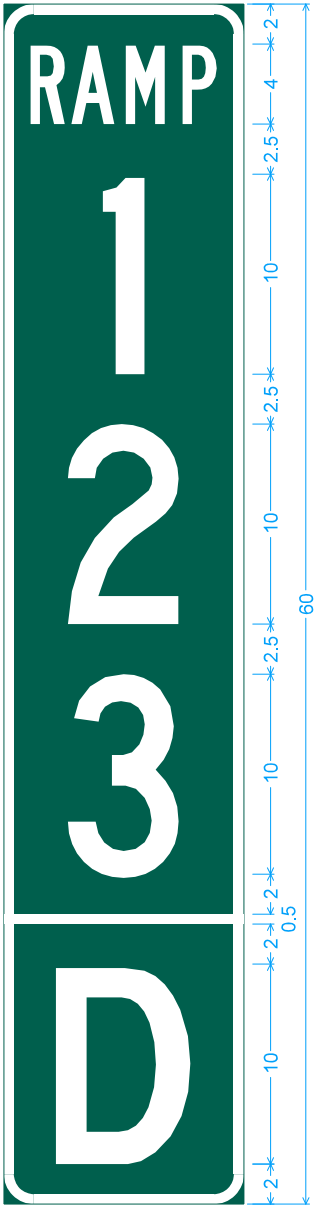

1.5" Radius, 0.5" Border, White on Green;
[RAMP] B 2K;
[1] C 2K; [2] C 2K;
[D] D 2K;



1.5" Radius, 0.5" Border, White on Green;
[RAMP] B 2K;
[1] C 2K; [2] C 2K;
[3] C 2K; [D] D 2K;




	REVISION	
	New	04-21-20
	SI-174	
STANDARD ROAD PLAN		SHEET 2 of 2
REVISIONS: New.		
		
APPROVED BY DESIGN METHODS ENGINEER		
EMERGENCY MANAGEMENT RAMP SIGNING		

To be effective, Chevron Sign Panels should be visible for at least 500 feet. Attach Chevron Sign Panels to the adjustable brackets at an angle so headlight beams are not reflected back into the driver's eye.

Furnish adjustable brackets in all aluminum or all galvanized steel products. Include locking devices on all bolts.

Each correctly installed "Guidance Marker, Chevron W1-8 (Special)" will be counted and paid for at the contract unit price. Payment is full compensation for furnishing and installing one wood post, two chevron W1-8 sign panels, approved mounting brackets, braces, and all work necessary to install as shown.

- ① Adjust chevron locations as necessary to meet S as near as possible.
- ② Possible delineators.
- ③ Align horizontal placement of Chevrons with roadway delineators if applicable.
- ④ Perforated Square Steel Tube (PSST) may be substituted for the wood post if allowed by the Engineer.

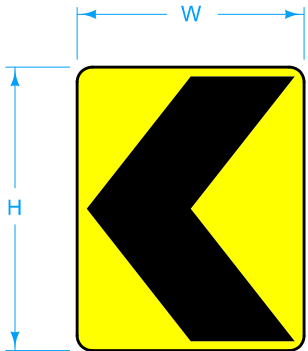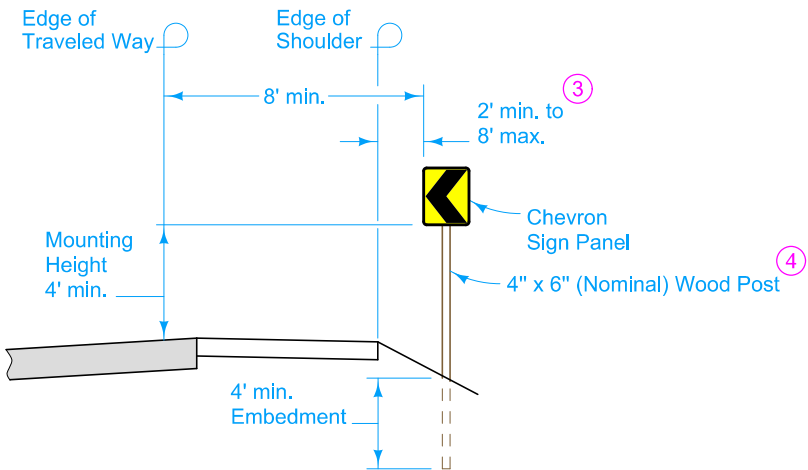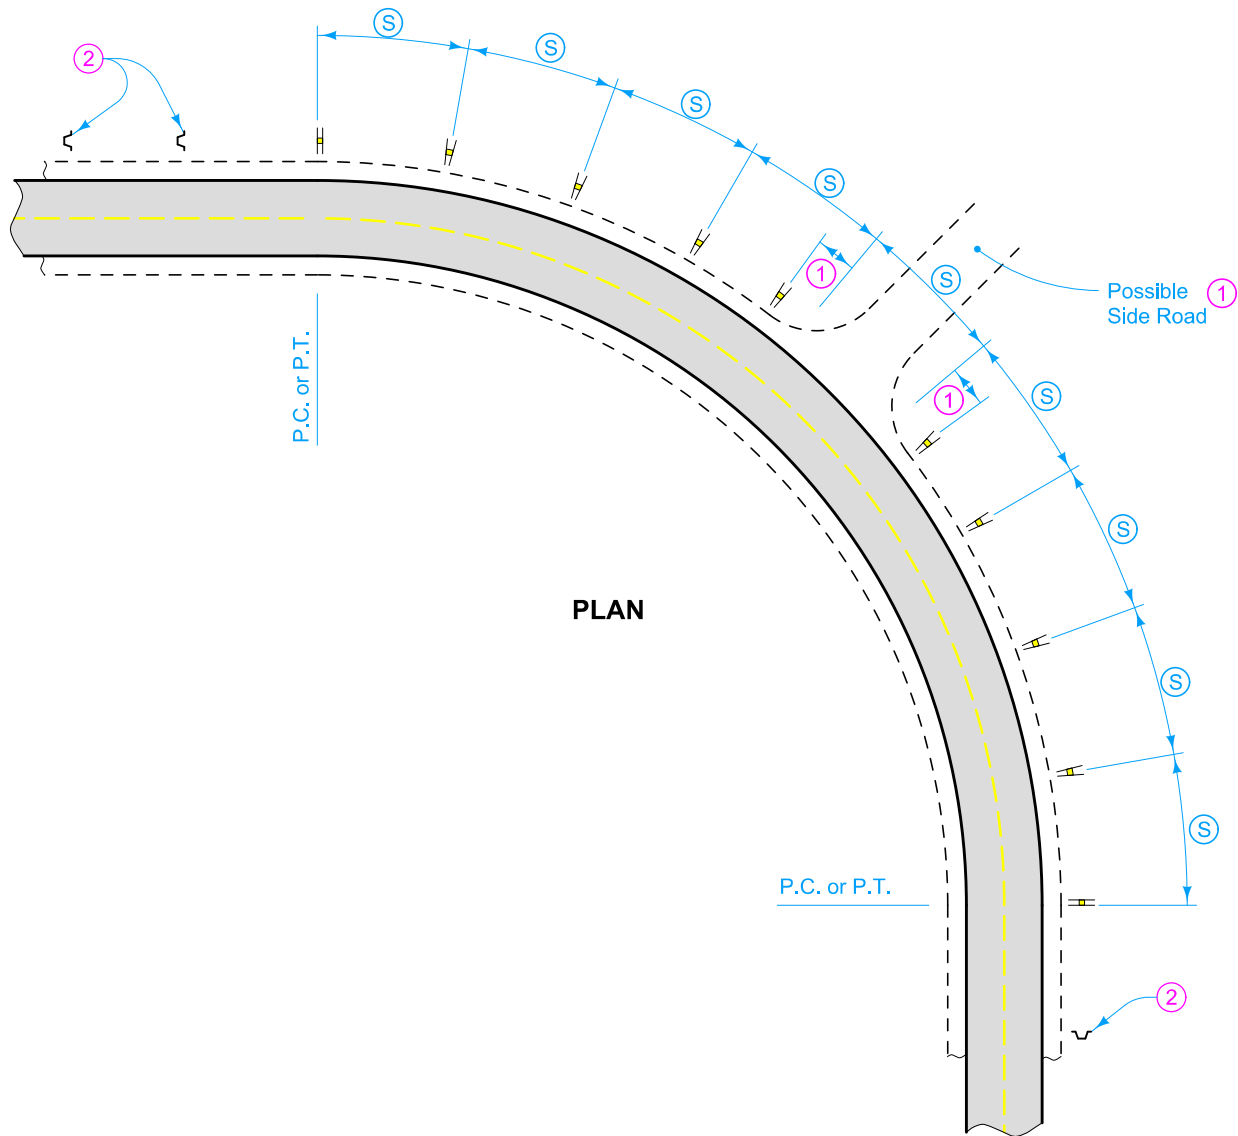

CHEVRON SIGN PANEL (W1-8)
Colors: Chevron - Black (non-reflective)
Background - Yellow (reflective)

Possible Contract Item:
Guidance Marker, Chevron W1-8 (Special)


Possible Tabulation:
108-34

REVISION	
3	04-19-16
SI-175	
SHEET 1 of 1	

REVISIONS: Changed mounting height to match MUTCD. Removed views of brackets no longer used. Added circle note 4.

APPROVED BY DESIGN METHODS ENGINEER

CHEVRONS

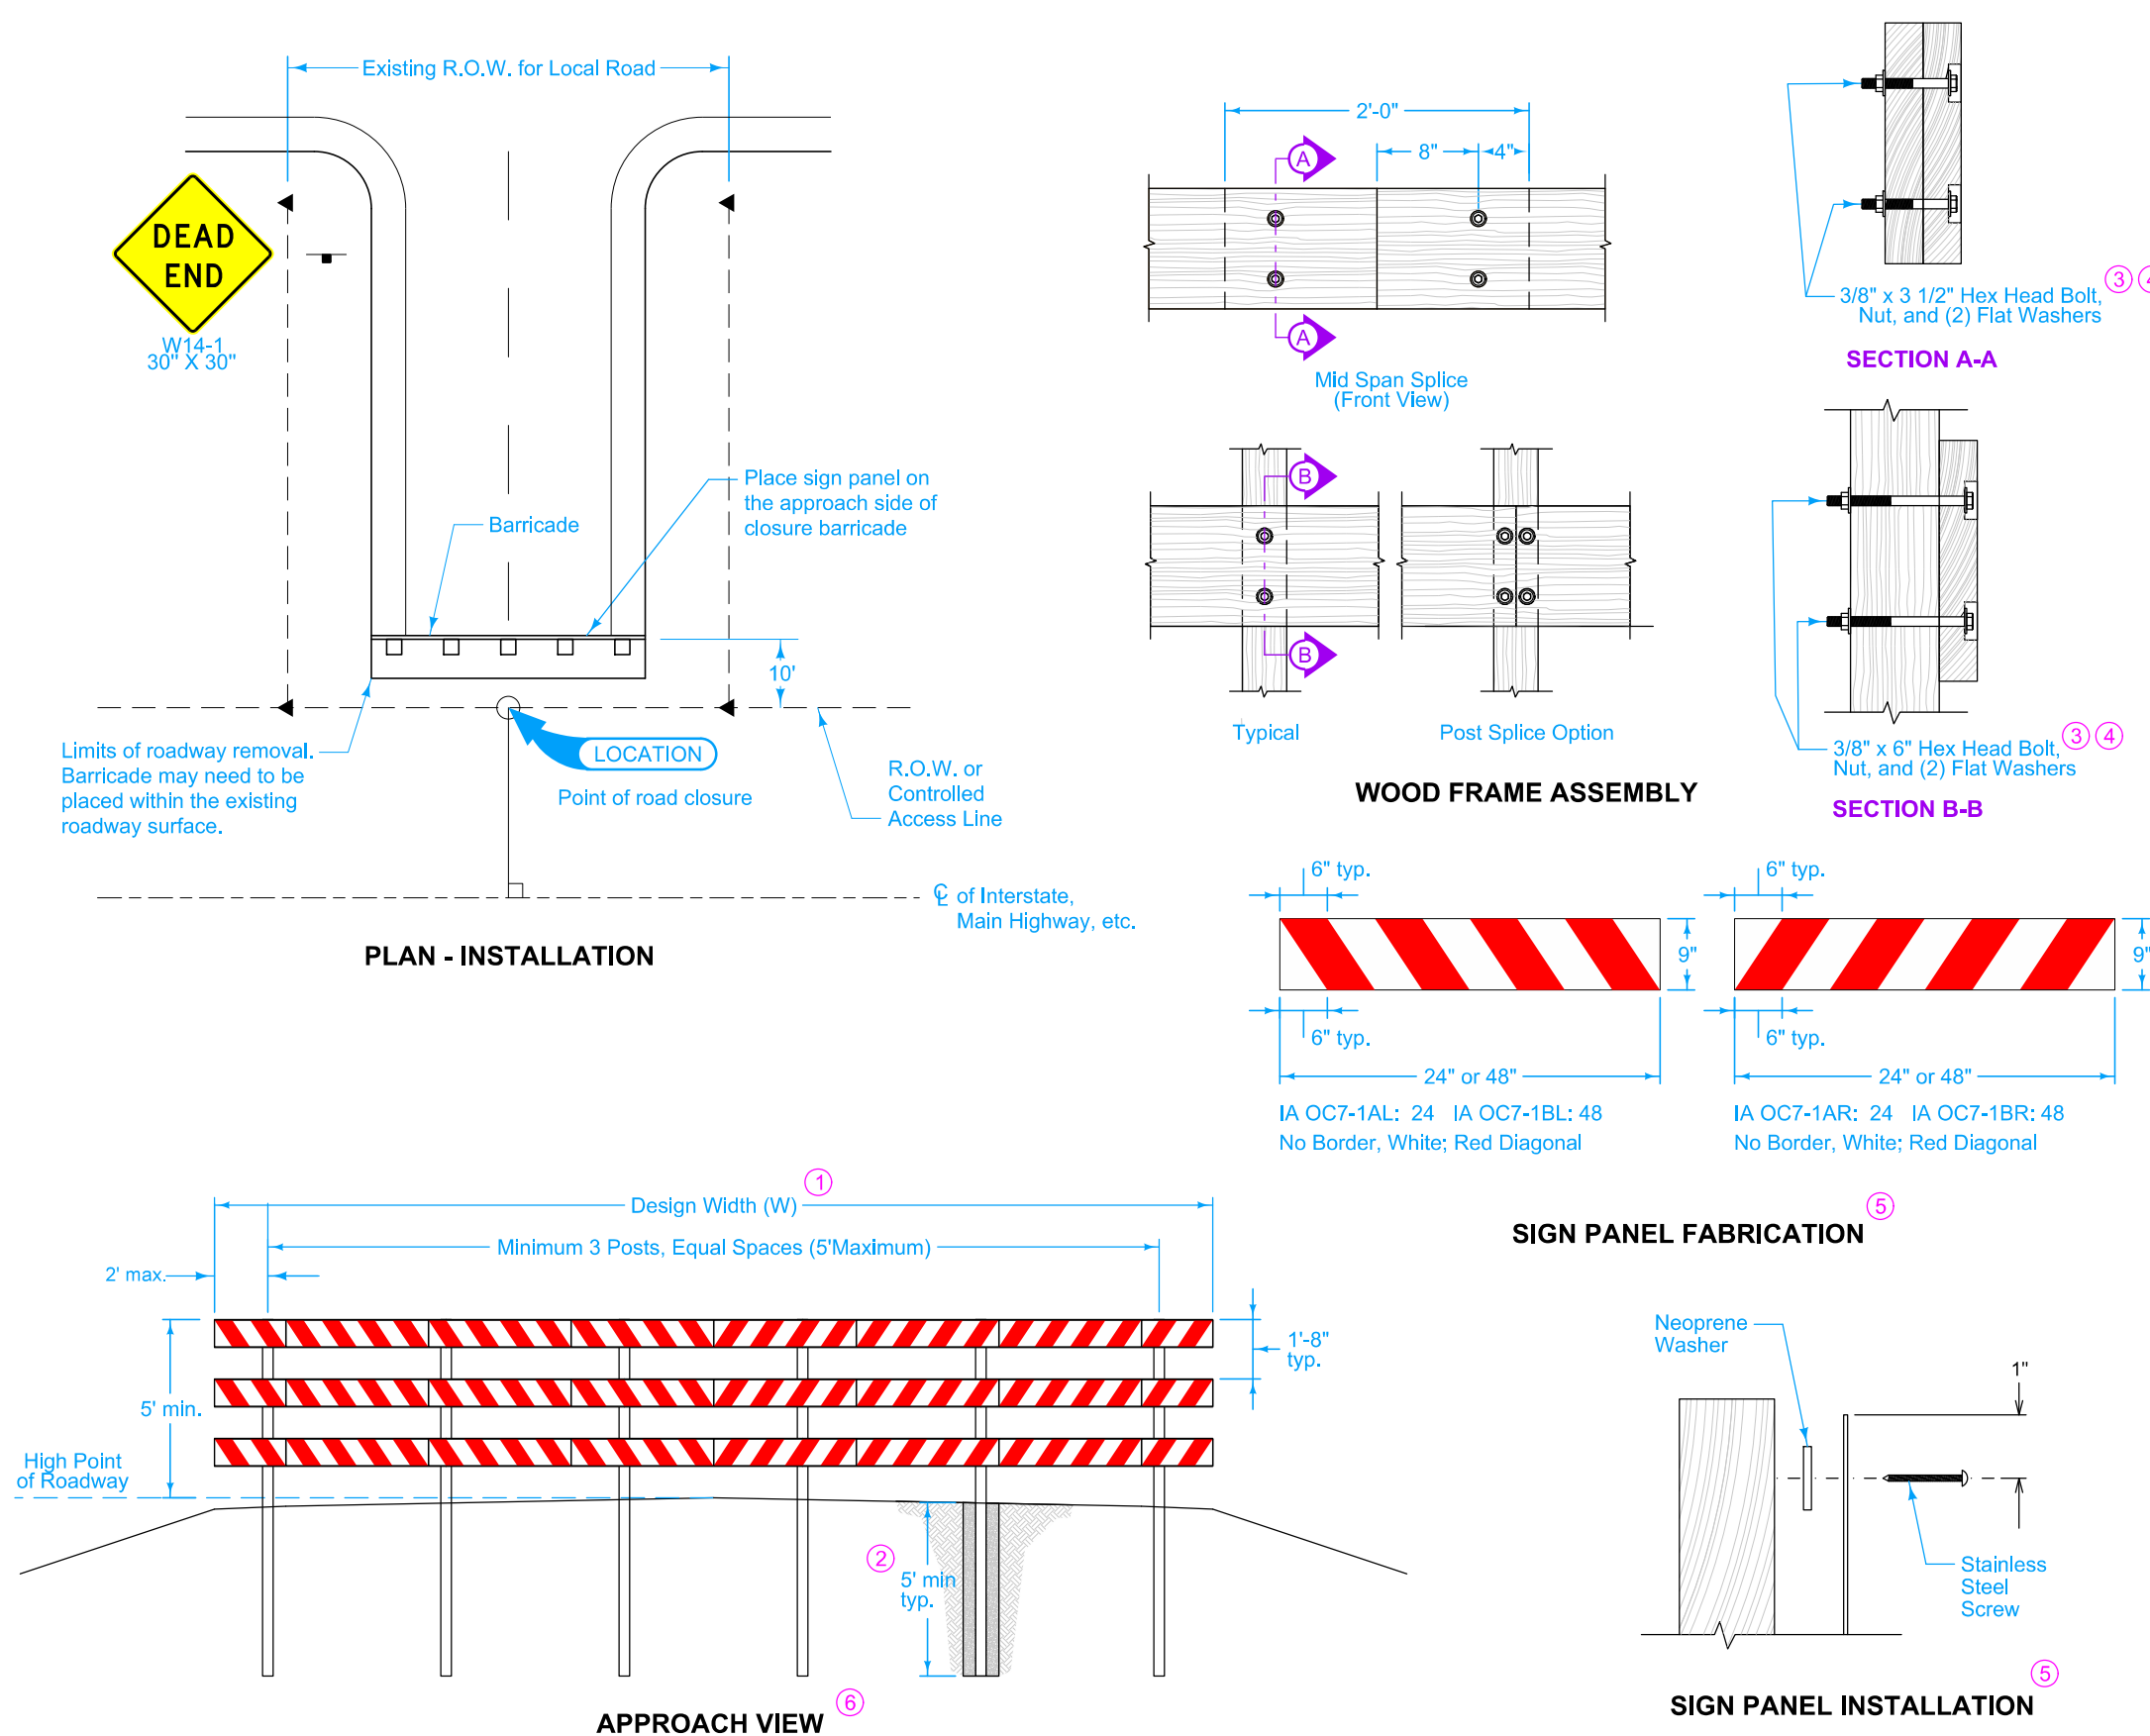

Price bid for "Permanent Road Closure, Rural, SI-181" includes furnishing and installing the barricade, signs, posts, and hardware.

The length will be measured in linear feet based on the width of standard sign panels installed.

The Contractor will be paid the contract unit price per linear foot.

Minimum Barricade length = design width (W).

① Design width (W) equals width of existing roadway and shoulders.

② Install posts according to Section 2524.03.B.1 of the Standard Specifications.

③ Assemble the wood frame with standard strength, hot dip galvanized bolts, nuts and washers according to the following specifications:

Bolts - ASTM A307
Nuts - ASTM A563
Washers - ASTM F884
Galvanization - ASTM F2329.

④ Recess all bolt heads in a 1 1/4 inch diameter x 1/2 inch deep hole to allow sign panels to lay flush on the planks.


⑤ Use 0.063 inch aluminum blank for sign panel. Install sign panel meeting the requirements of Section 2524 of the Standard Specifications. Attach sign panels to the planks along the top and bottom at 2 foot centers using #10 x 1 1/4 inch self-drilling, phillips, pan head, 18-8 stainless steel screws. Use a 1 in. OD x 1/8 in. thick neoprene washer between the sign panel and the treated wood plank to prevent corrosion.

⑥ Use pressure treated 4 in. x 4 in. x 12 ft. nominal boards for posts, and pressure treated 2 in. x 10 in. x variable length nominal boards for planks. Use planks of sufficient length to span at least 2 posts.


Possible Contract Item:
Permanent Road Closure, Rural, SI-181

Possible Tabulation:
102-4


IOWA DOT	REVISION	
	2	10-18-16
STANDARD ROAD PLAN		SI-181
REVISIONS:		Replaced old Iowa DOT logo with new logo.
APPROVED BY DESIGN METHODS ENGINEER		
PERMANENT ROAD CLOSURE - RURAL		

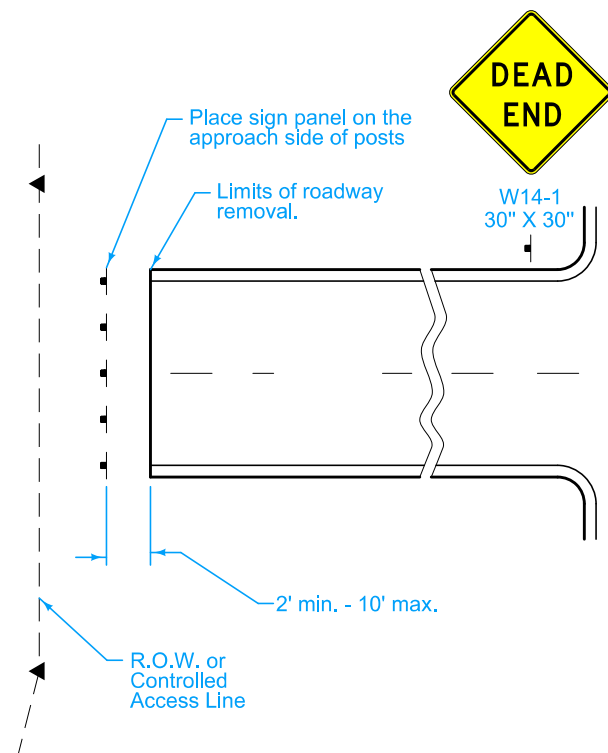


DEAD END WITHOUT CUL-DE-SAC

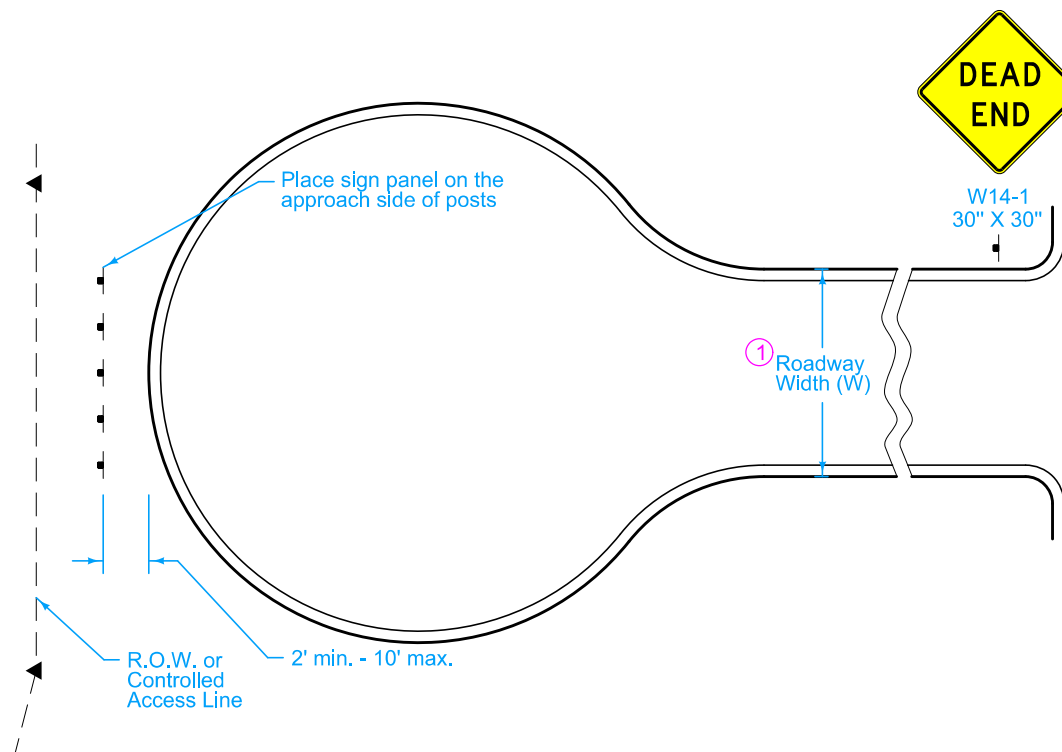

DEAD END WITH CUL-DE-SAC

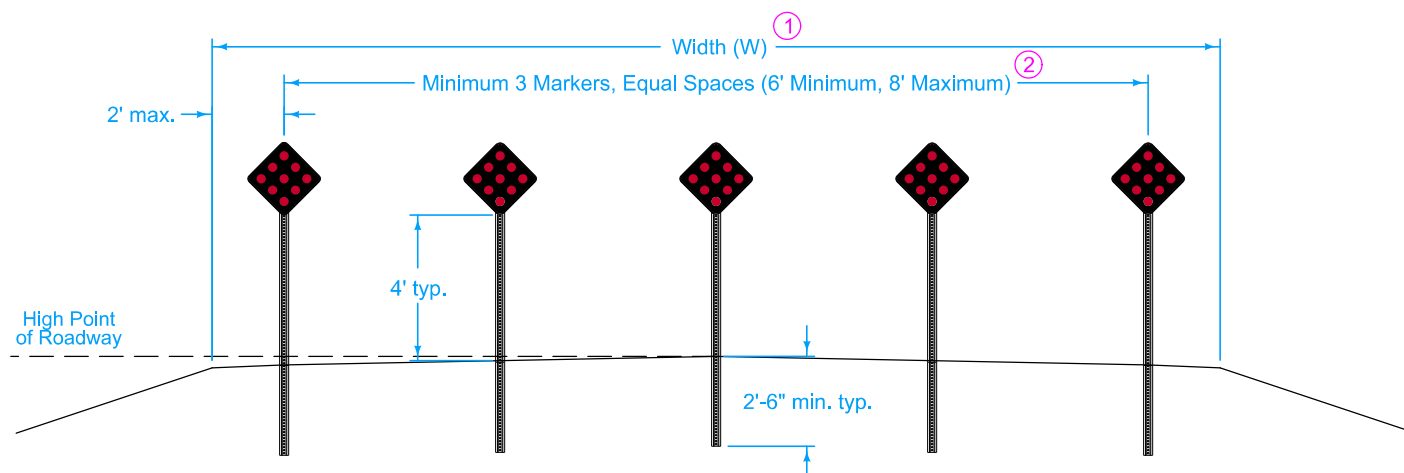

APPROACH VIEW

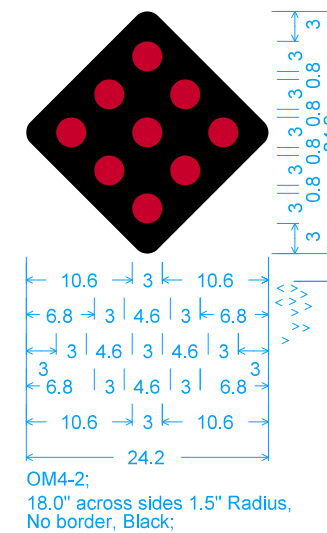

END OF ROADWAY MARKER FABRICATION ③



Price bid for "Permanent Road Closure, Urban, SI-182" includes furnishing and installing the closure, signs, posts, and hardware.


Closures will be counted and the contractor will be paid the contract unit price for each closure.

- ① Width includes the width of the existing roadway and shoulders.
- ② Type I delineator posts.
- ③ Use 0.063 inch aluminum blank with Type IV retro reflective sheeting for sign panel.


Possible Contract Item:
Permanent Road Closure, Urban, SI-182

Possible Tabulation:
102-4


 IOWA DOT		REVISION	
		2	04-19-16
STANDARD ROAD PLAN		SI-182	
		SHEET 1 of 1	
REVISIONS:		Removed OM4-1 and OM4-3 from END OF ROADWAY MARKER FABRICATION detail. Revised note 3 and APPROACH VIEW detail.	
			
APPROVED BY DESIGN METHODS ENGINEER			
PERMANENT ROAD CLOSURE - URBAN			

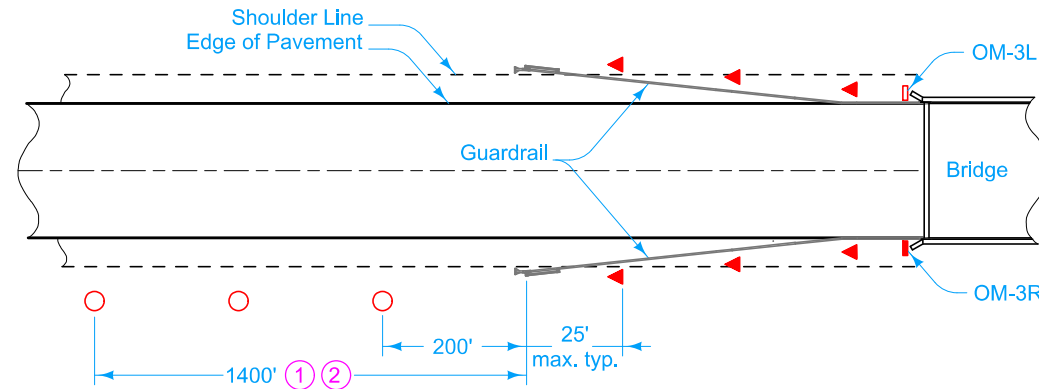

TYPE 1
BRIDGE OR CONCRETE BARRIER RAIL
 (LESS THAN FULL SHOULDER WIDTH AND BRIDGE/ROADWAY WIDTH LESS THAN 30 FT.)

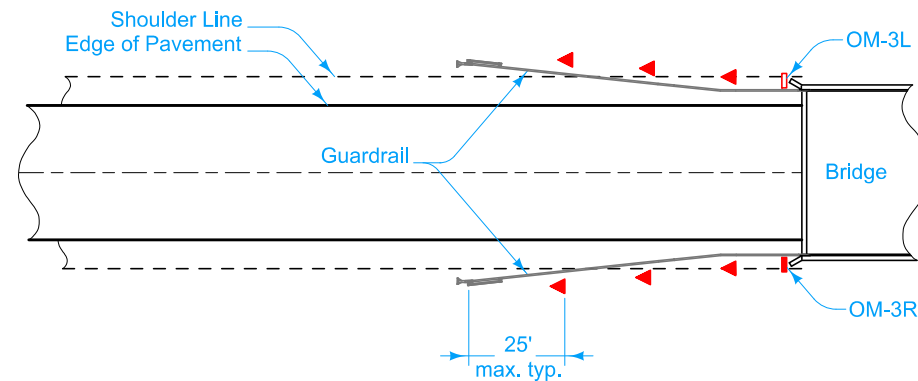

TYPE 2
BRIDGE OR CONCRETE BARRIER RAIL
 (LESS THAN FULL SHOULDER WIDTH AND BRIDGE/ROADWAY WIDTH 30 FT. OR GREATER)

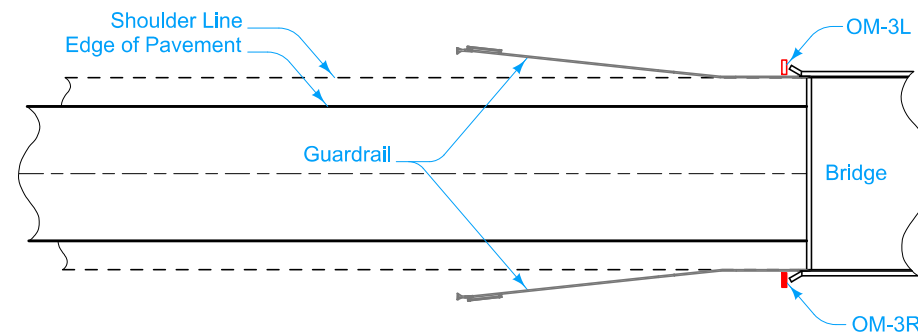

TYPE 3
BRIDGE OR CONCRETE BARRIER RAIL
 (FULL SHOULDER WIDTH)

INSTALLATION AT BRIDGES

LEGEND	
	Type 3 Object Marker, Left (OM-3L)
	Type 3 Object Marker, Right (OM-3R)
	Type 2 Object Marker
	Rigid Delineator, Type 1 White



See [SI-172](#) for details of Delineators and [SI-173](#) for details of Object Markers.


TYPE 1:
 Beginning 25 feet from the approach end of guardrail, install Type 2 Object Markers at 25 foot intervals behind the guardrail. Install Type 3 Object Marker at the bridge ends. On paved roadways only, install 7 Single White Delineators at 200 foot spacing beginning 200 feet in front of the approach end of the guardrail. For ramp terminals see note 2.

TYPE 2:
 Beginning 25 feet from the approach end of guardrail, install Type 2 Object Markers at 25 foot intervals behind the guardrail. Install Type 3 Object Marker at the bridge ends.


TYPE 3:
 Install Type 3 Object Markers at the bridge ends.

- ① Not required on projects where delineators are proposed or installed throughout the length of the project.
- ② At ramp terminals only, install Single White Delineators as follows: Place first delineator at location where near ramp terminal radius meets the edge of the through pavement. Place additional delineator(s) spaced equally (spacing not to exceed 200 feet) between first delineator and guardrail.


 IOWA DOT	REVISION	
	3	10-18-22
	SI-211	
	SHEET 1 of 3	
STANDARD ROAD PLAN		
REVISIONS: Removed OM-3L from Type 8.		
		
APPROVED BY DESIGN METHODS ENGINEER		
<div>OBJECT MARKER AND DELINEATOR PLACEMENT WITH GUARDRAIL</div>		

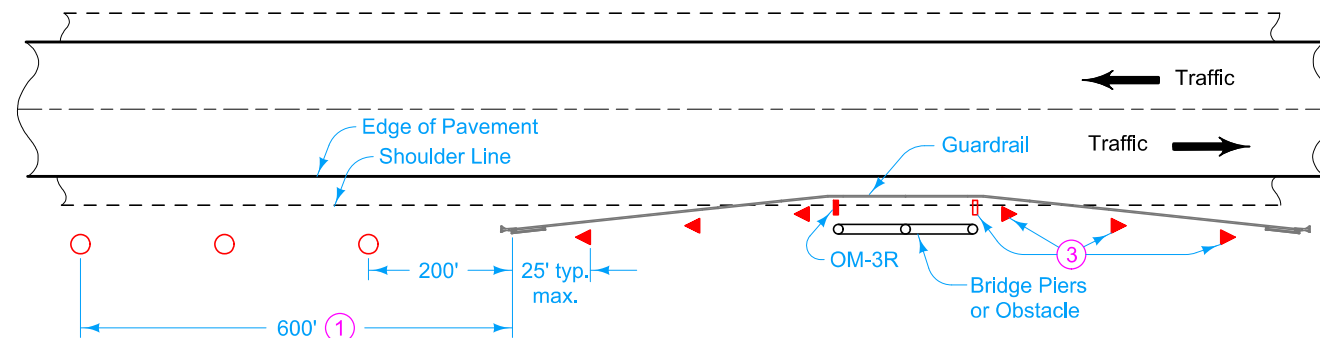

TYPE 4
MARKING SIDE OBSTACLES
 (STEEL BEAM GUARDRAIL ON THE SHOULDER)

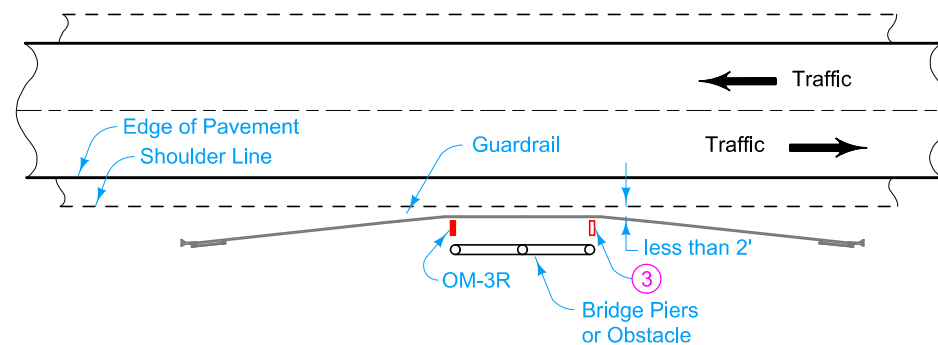

TYPE 5
MARKING SIDE OBSTACLES
 (STEEL BEAM GUARDRAIL LESS THAN 2 FT. FROM THE SHOULDER LINE)

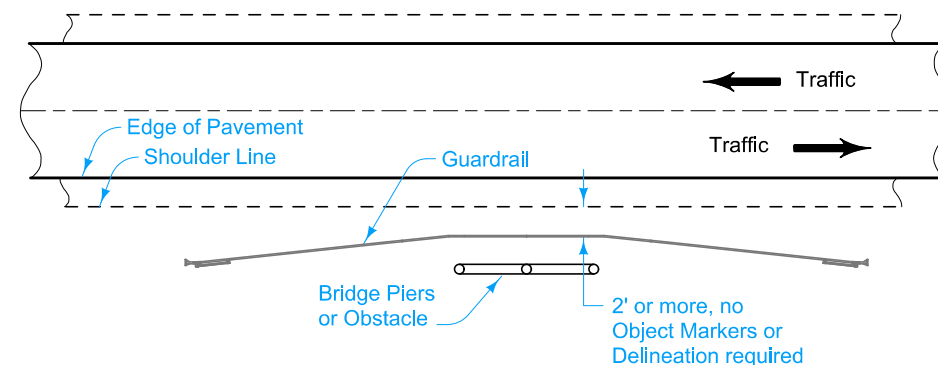



TYPE 6
MARKING SIDE OBSTACLES
 (STEEL BEAM GUARDRAIL 2 FT. OR MORE FROM THE SHOULDER LINE)


INSTALLATION AT SIDE OBSTACLES

LEGEND	
	Type 3 Object Marker, Left (OM-3L)
	Type 3 Object Marker, Right (OM-3R)
	Type 2 Object Marker
	Rigid Delineator, Type 1 White


TYPE 4:
 Beginning 25 feet from the approach end of guardrail, install Type 2 Object Markers at 25 foot intervals behind the guardrail. Beginning 200 feet in front of approach end of the guardrail, install 3 Single White Delineators at 200 foot spacing. Additional markers as shown.

- ① Not required on projects where delineators are proposed or installed throughout the length of the project.
- ③ Type 2 and Type 3 Object Marker at trailing end of obstacle not required when one-way traffic exists.

 IOWA DOT	REVISION	
	3	10-18-22
	SI-211	
STANDARD ROAD PLAN		
SHEET 2 of 3		
REVISIONS: Removed OM-3L from Type 8.		
		
APPROVED BY DESIGN METHODS ENGINEER		
<div>OBJECT MARKER AND DELINEATOR PLACEMENT WITH GUARDRAIL</div>		

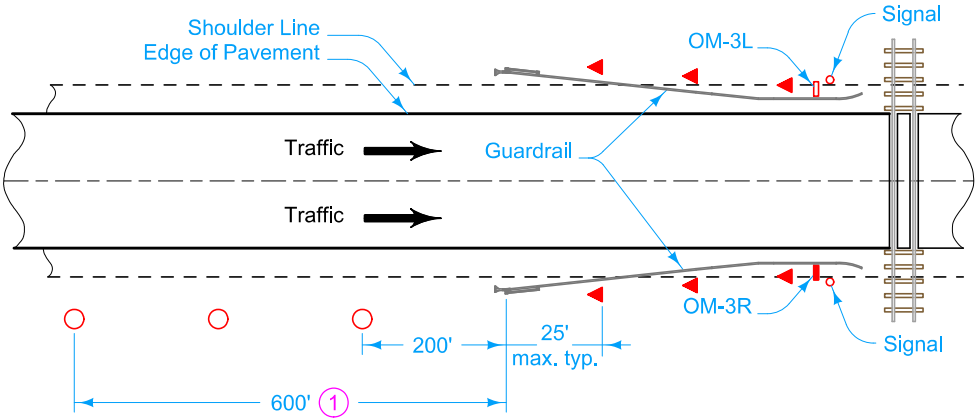

TYPE 7
MARKING RAILROAD CROSSING SIGNALS
(ONE-WAY TRAFFIC)

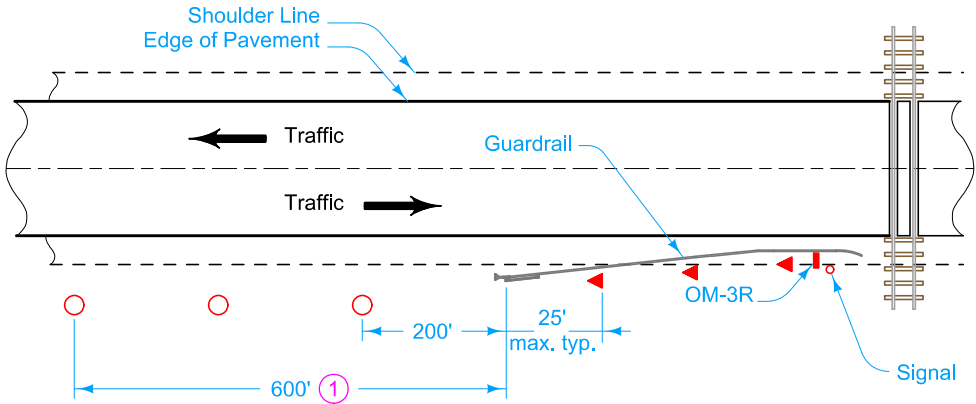



TYPE 8
MARKING RAILROAD CROSSING SIGNALS
(TWO-WAY TRAFFIC)


LEGEND	
	Type 3 Object Marker, Left (OM-3L)
	Type 3 Object Marker, Right (OM-3R)
	Type 2 Object Marker
	Rigid Delineator, Type 1 White

TYPE 7:
Beginning 25 feet from the approach end of guardrail, install Type 2 Object Markers at 25 foot intervals behind the guardrail. Beginning 200 feet in front of approach end of the outside guardrail, install 3 Single White Delineators at 200 foot spacing.


TYPE 8:
Beginning 25 feet from the approach end of guardrail, install Type 2 Object Markers at 25 foot intervals behind the guardrail. Beginning 200 feet in front of approach end of the right guardrail, install 3 Single White Delineators at 200 foot spacing.

① Not required on projects where delineators are proposed or installed throughout the length of the project.

 IOWA DOT	REVISION	
	3	10-18-22
	SI-211	
	SHEET 3 of 3	
REVISIONS: Removed OM-3L from Type 8.		
		
APPROVED BY DESIGN METHODS ENGINEER		
<div>OBJECT MARKER AND DELINEATOR PLACEMENT WITH GUARDRAIL</div>		

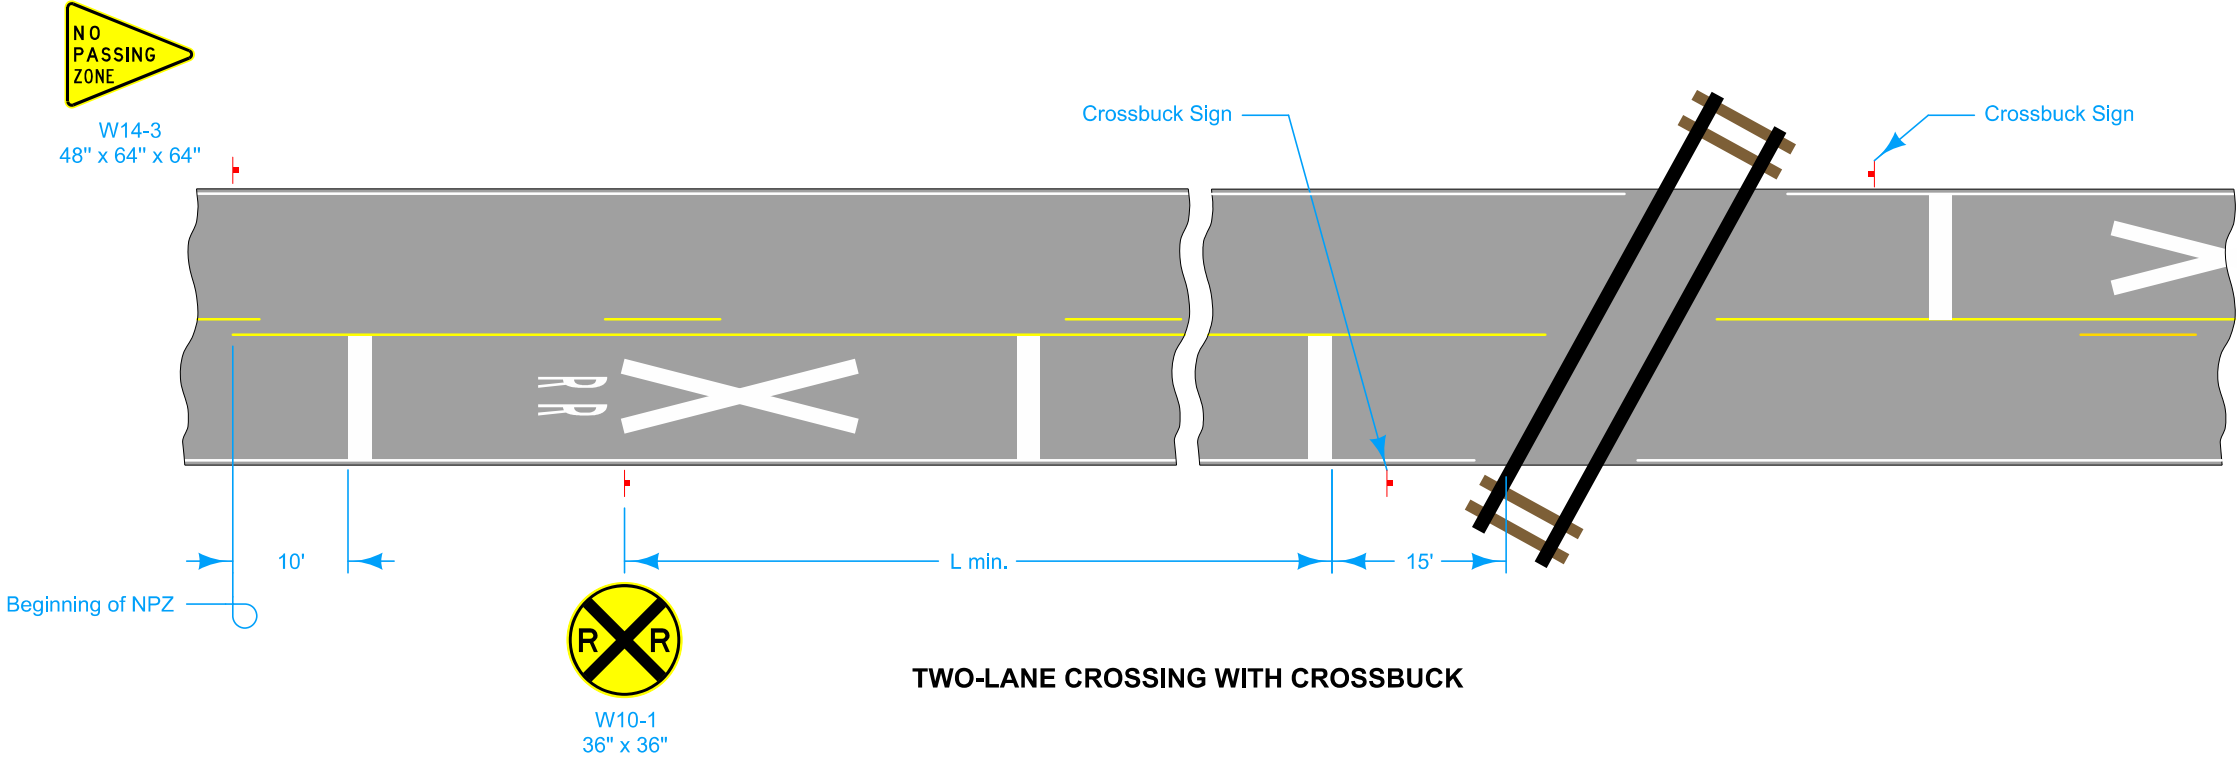

TWO-LANE CROSSING WITH CROSSBUCK

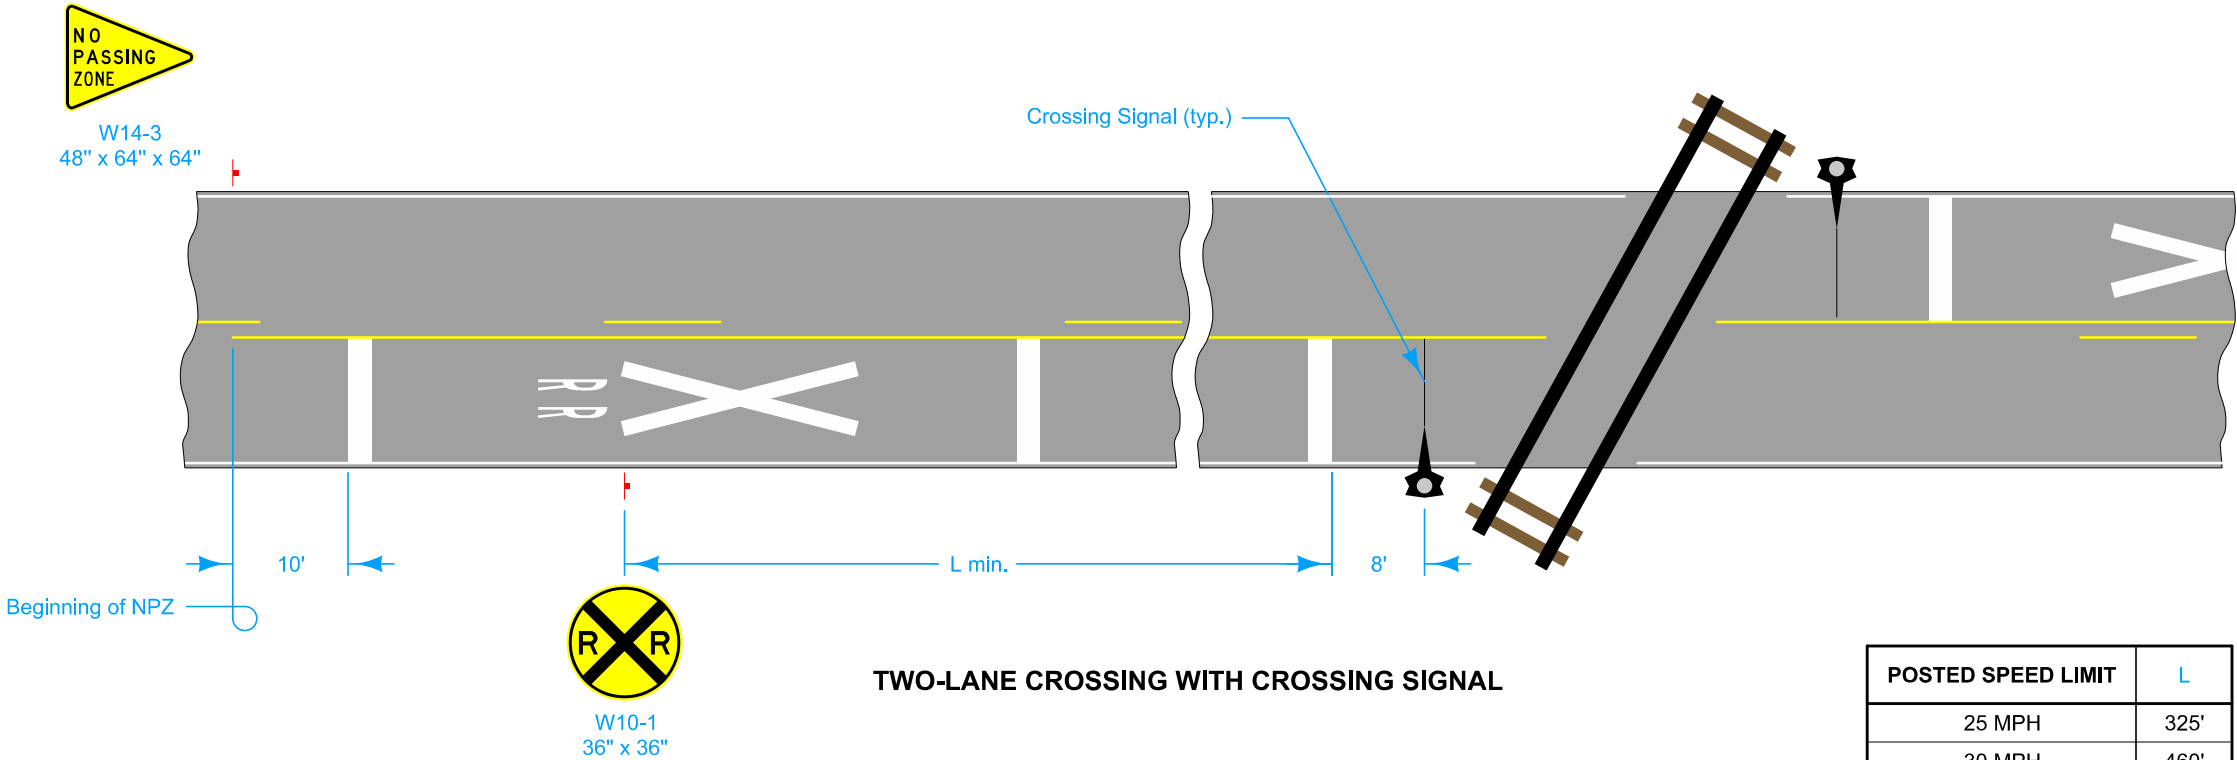

TWO-LANE CROSSING WITH CROSSING SIGNAL

POSTED SPEED LIMIT	L
25 MPH	325'
30 MPH	460'
35 MPH	565'
40 MPH	670'
45 MPH	775'
50 MPH	885'
55 MPH	990'
60 MPH	1100'
65 MPH	1200'

LEGEND

Traffic Sign

IOWA DOT

STANDARD ROAD PLAN

REVISIONS: Modified paint lines at railroad tracks.

APPROVED BY DESIGN METHODS ENGINEER


SIGN PLACEMENT
APPROACHING A RAILROAD CROSSING

REVISION

204-20-21

SI-241


SHEET 1 of 2

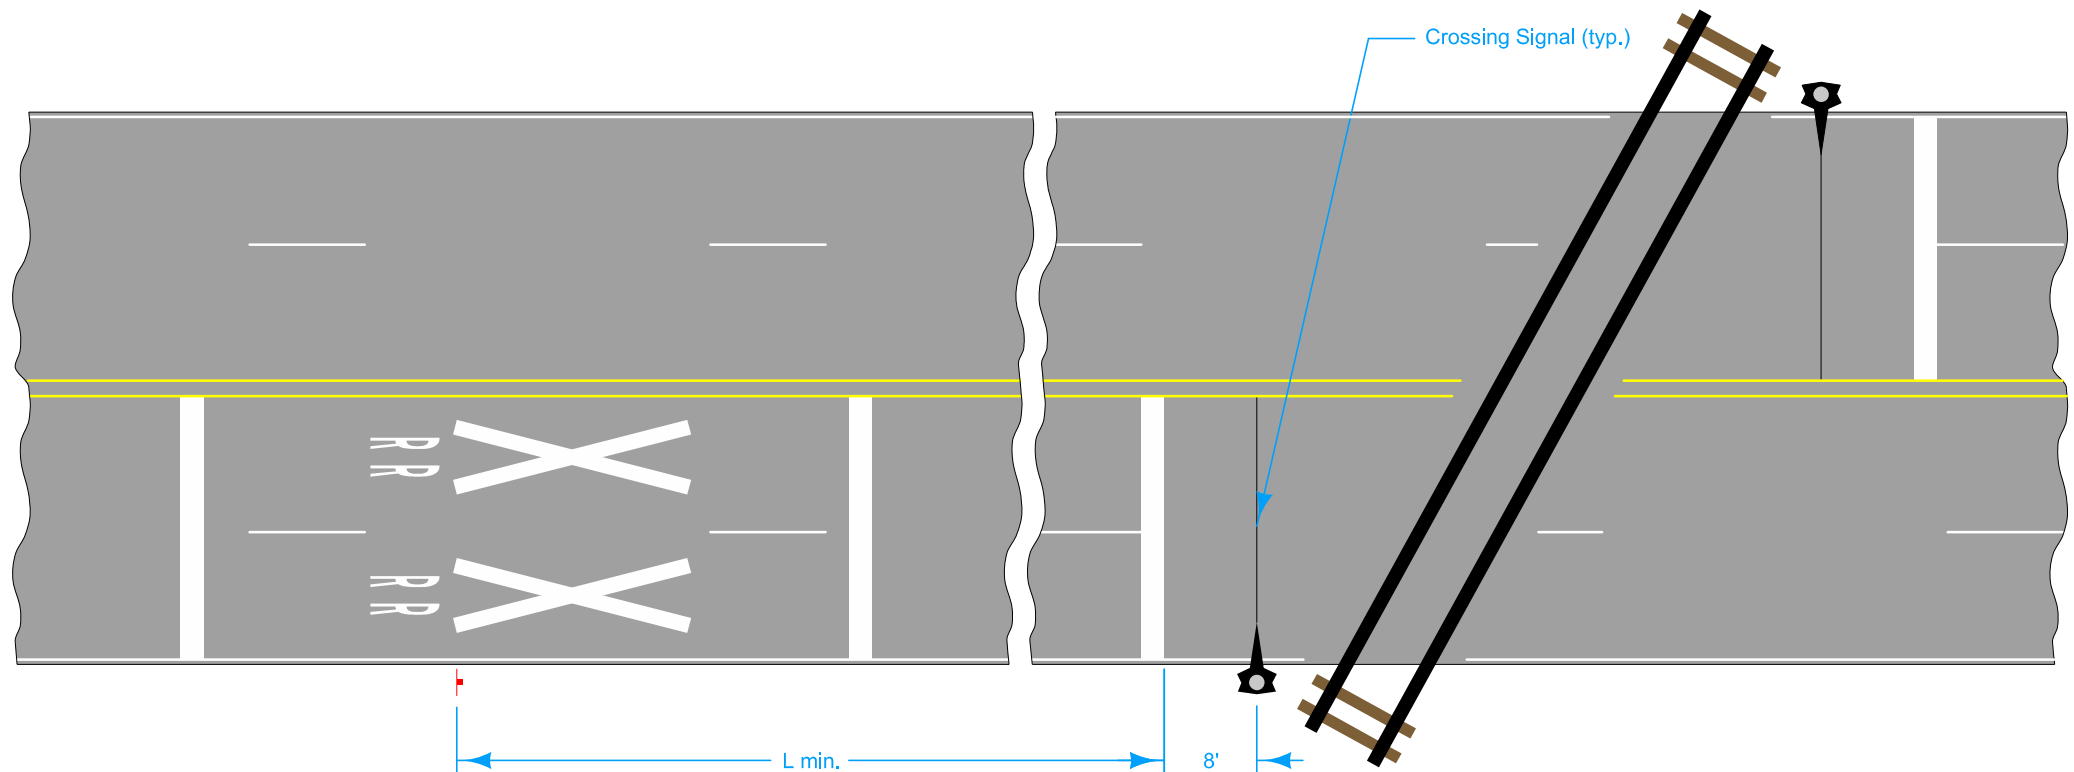

FOUR-LANE CROSSING WITH CROSSING SIGNAL


W10-1
36" x 36"

POSTED SPEED LIMIT	L
25 MPH	325'
30 MPH	460'
35 MPH	565'
40 MPH	670'
45 MPH	775'
50 MPH	885'
55 MPH	990'
60 MPH	1100'
65 MPH	1200'



STANDARD ROAD PLAN

REVISIONS: Modified paint lines at railroad tracks.



APPROVED BY DESIGN METHODS ENGINEER

SIGN PLACEMENT


APPROACHING A RAILROAD CROSSING

REVISION


2	04-20-21
---	----------

SI-241


SHEET 2 of 2

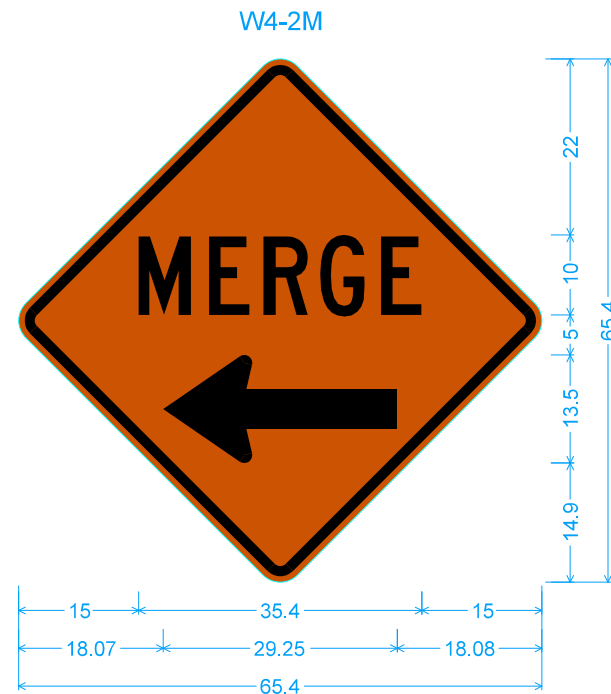


W4-2M;
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;
[MERGE] C 2K;
Standard Arrow Custom 29.25" X 13.50" 180°;

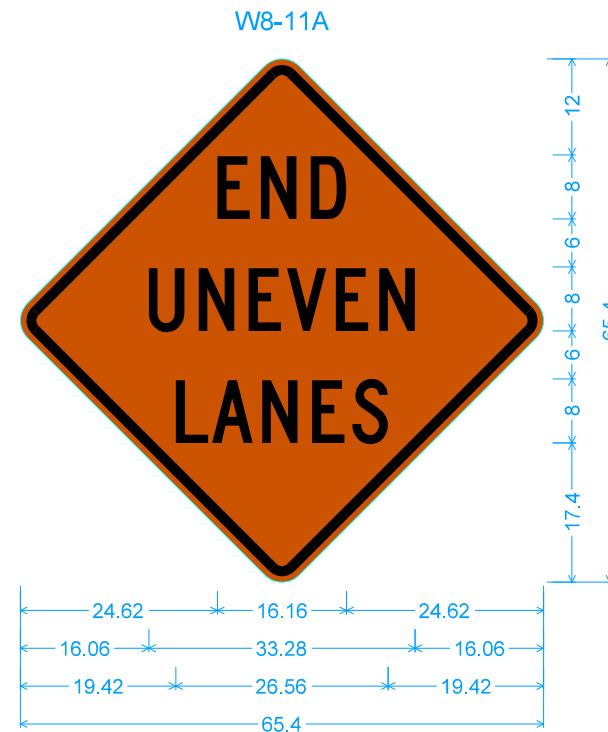


W8-11A;
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;
[END] C 2K; [UNEVEN] C 2K; [LANES] C 2K;

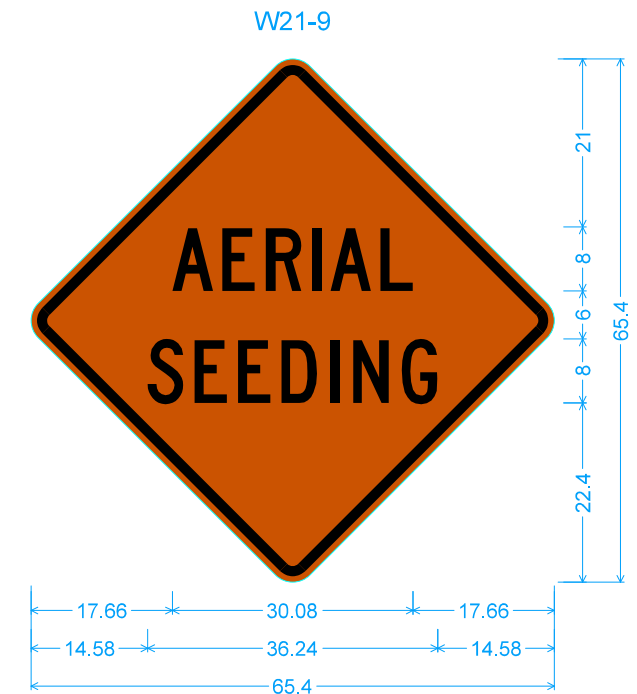



W21-9;
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;
[AERIAL] C 2K; [SEEDING] C 2K;






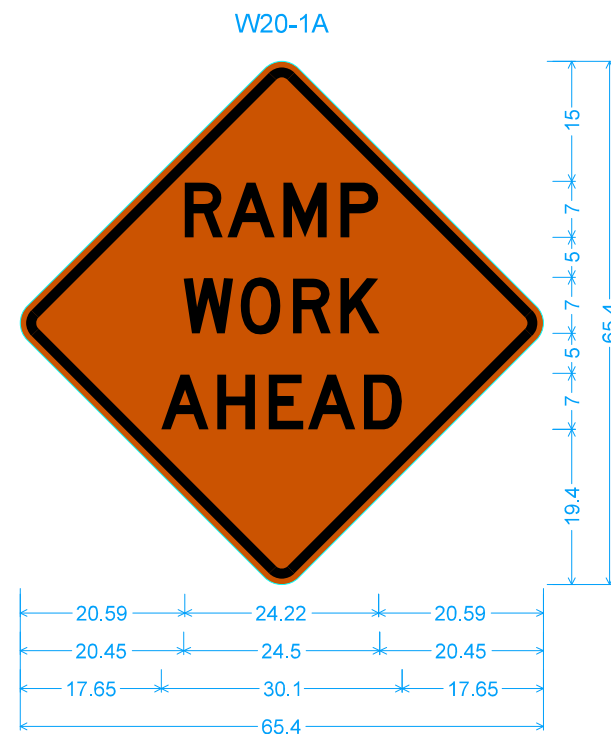


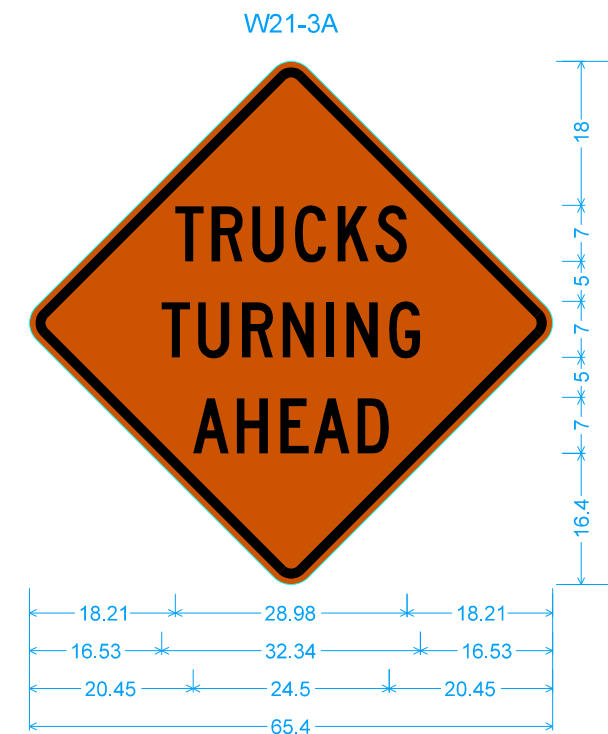

W20-1A;
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;
[RAMP] D 2K; [WORK] D 2K; [AHEAD] D 2K;











W20-1A;
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;
[TRUCKS] C 2K; [TURNING] C 2K;
[AHEAD] C 2K;

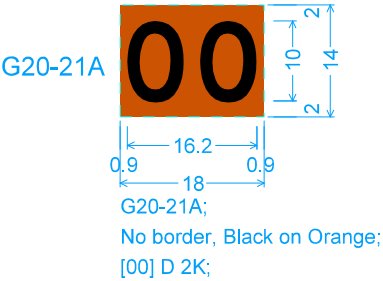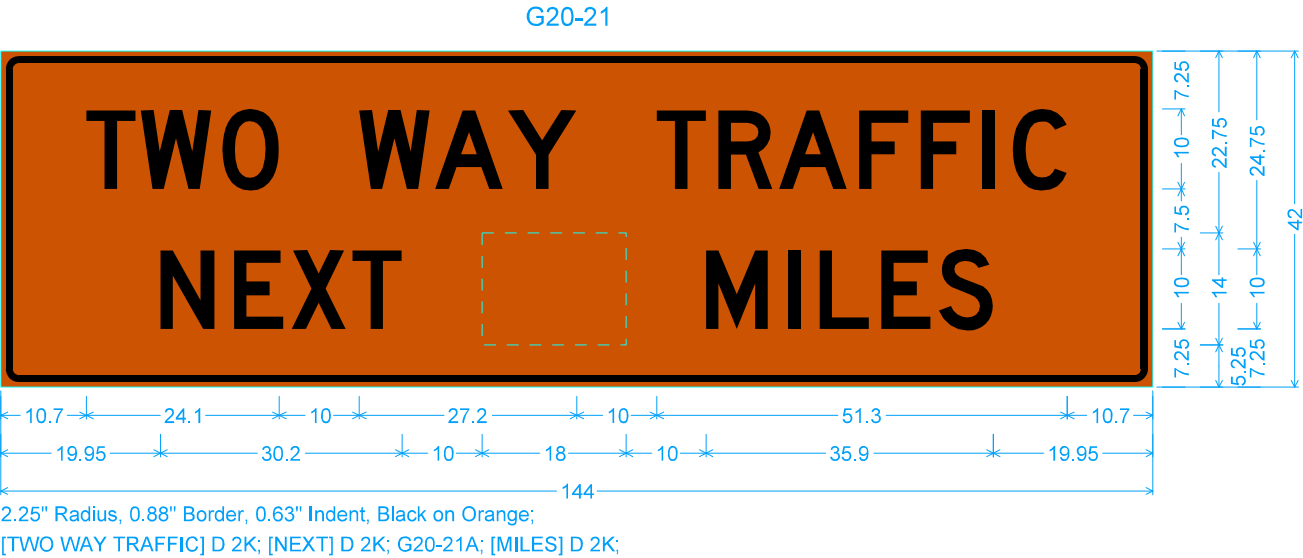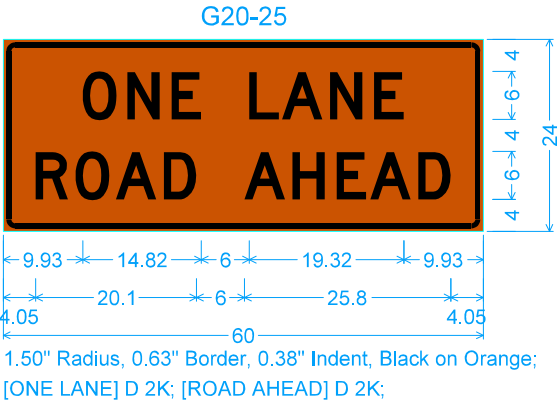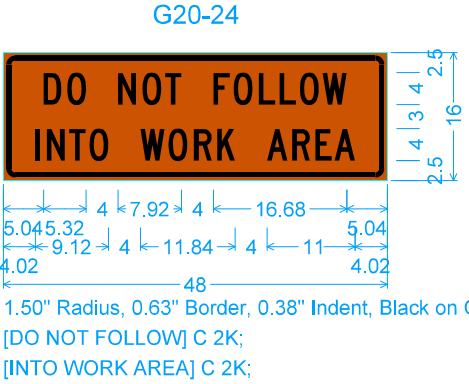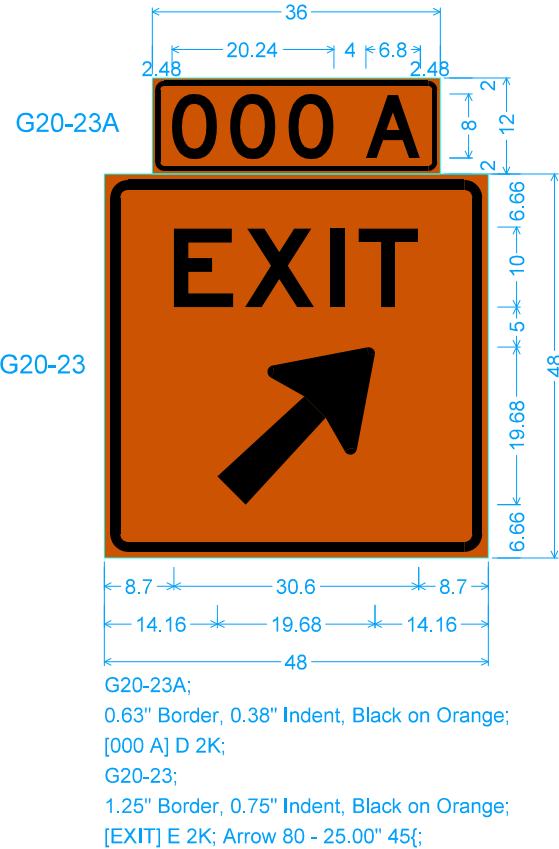
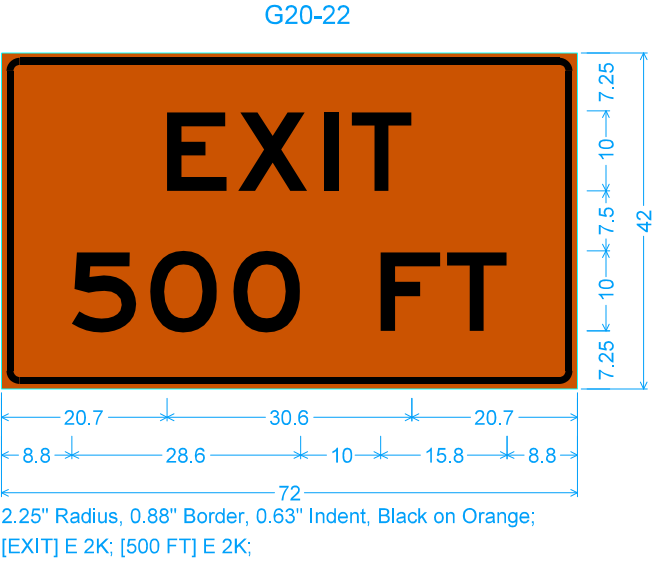
 IOWA DOT	REVISION	
	6	04-16-19
	SI-881	
	SHEET 1 of 4	
STANDARD ROAD PLAN		
REVISIONS: Added WORK ZONE sign to page 4.		
		
APPROVED BY DESIGN METHODS ENGINEER		
SPECIAL SIGNS FOR WORKZONES		











 IOWA DOT	REVISION	
	6	04-16-19
	SI-881	
STANDARD ROAD PLAN		
SHEET 2 of 4		
REVISIONS: Added WORK ZONE sign to page 4.		
		
APPROVED BY DESIGN METHODS ENGINEER		

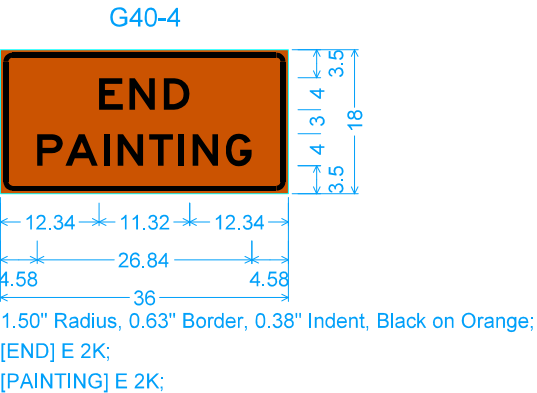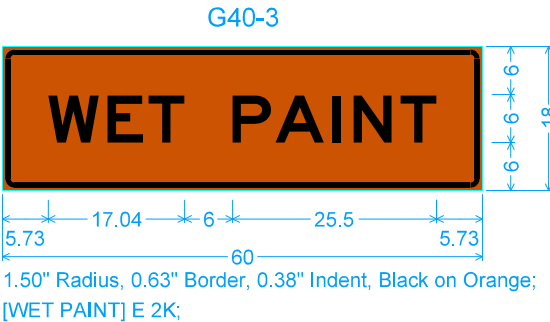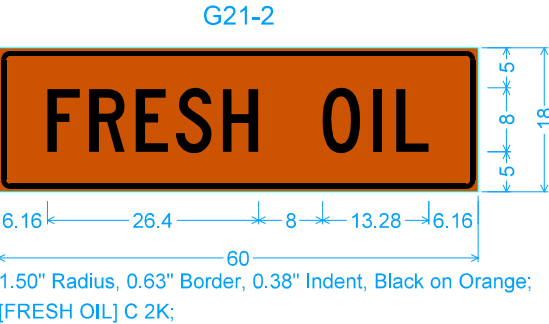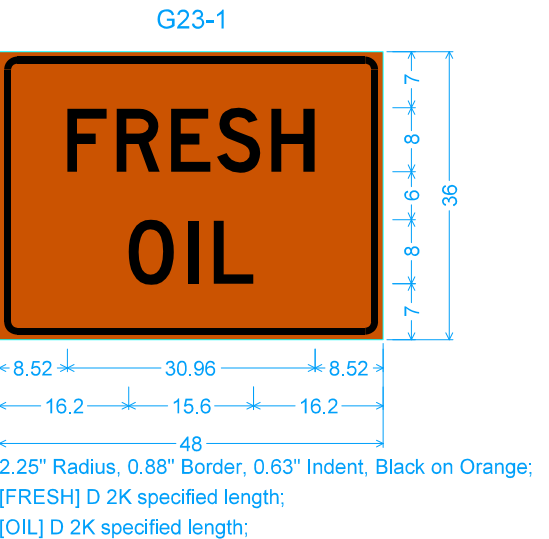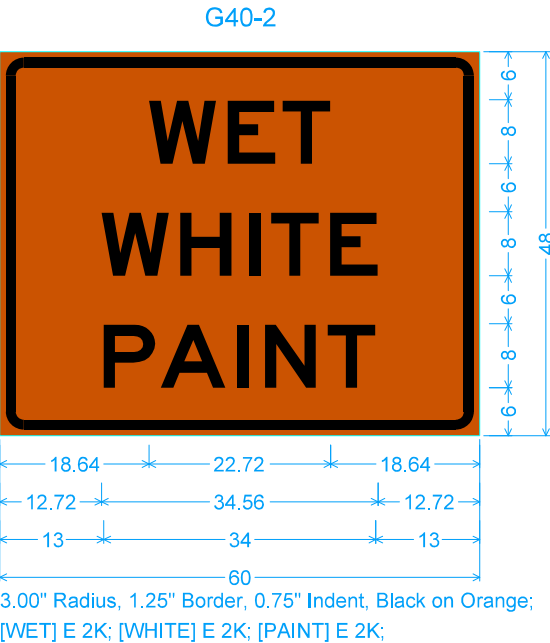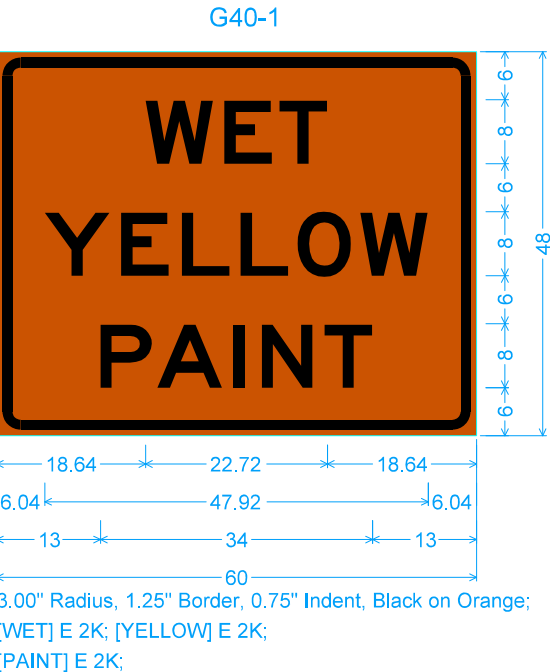

 IOWA DOT	REVISION	
	6	04-16-19
	SI-881	
	SHEET 3 of 4	
REVISIONS: Added WORK ZONE sign to page 4.		
		
APPROVED BY DESIGN METHODS ENGINEER		
SPECIAL SIGNS FOR WORKZONES		

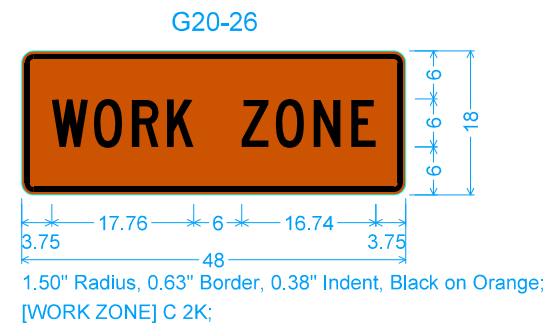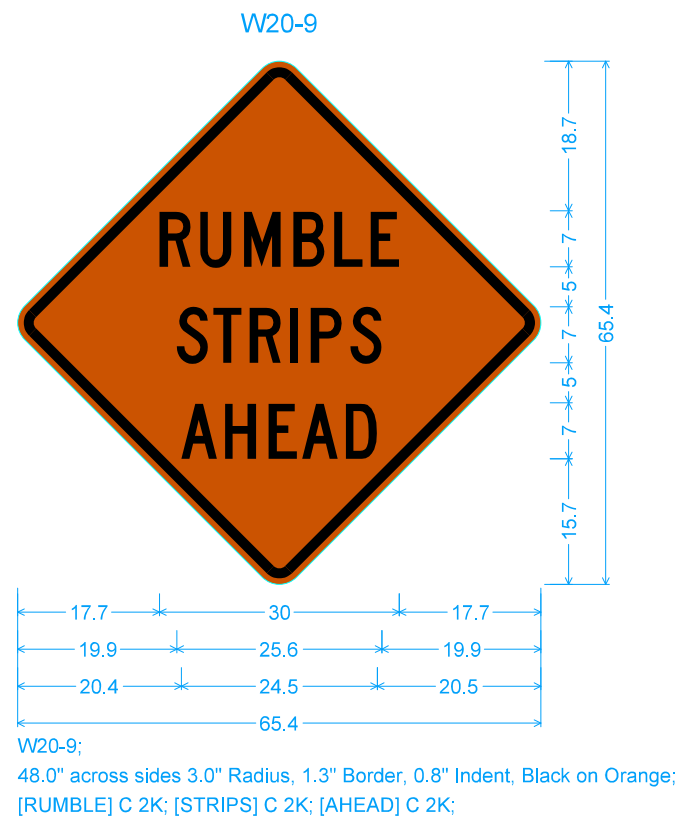


 IOWA DOT	REVISION	
	6	04-16-19
	SI-881	
	SHEET 4 of 4	
REVISIONS: Added WORK ZONE sign to page 4.		
		
APPROVED BY DESIGN METHODS ENGINEER		
SPECIAL SIGNS FOR WORKZONES		

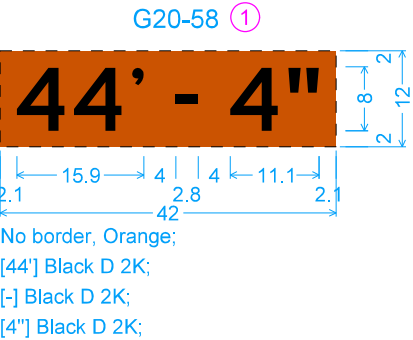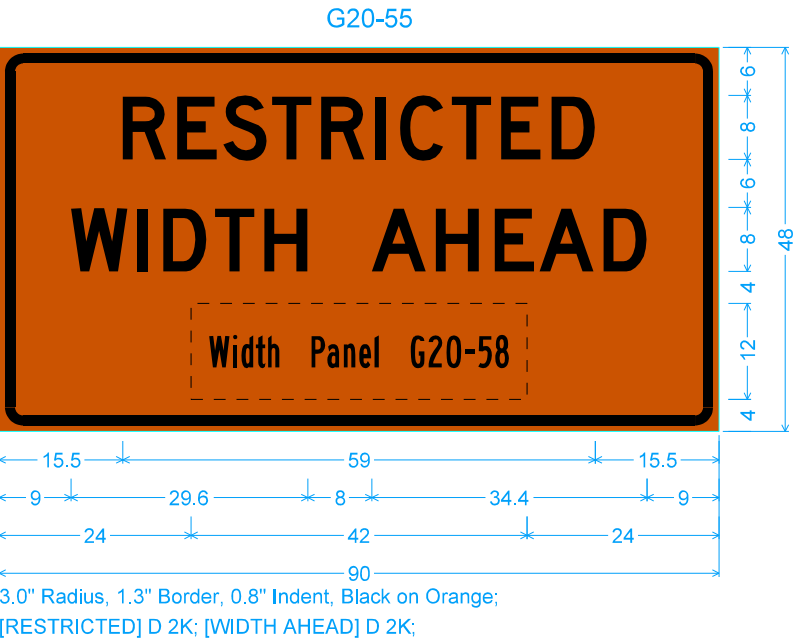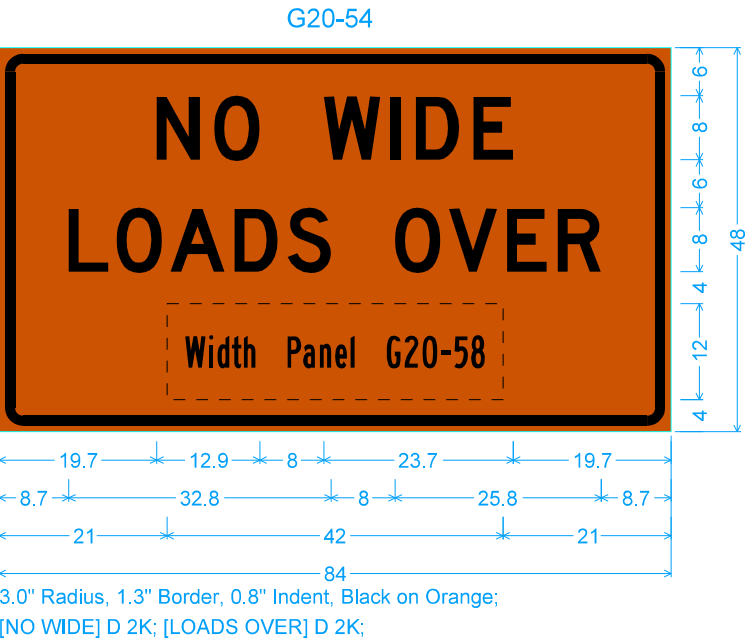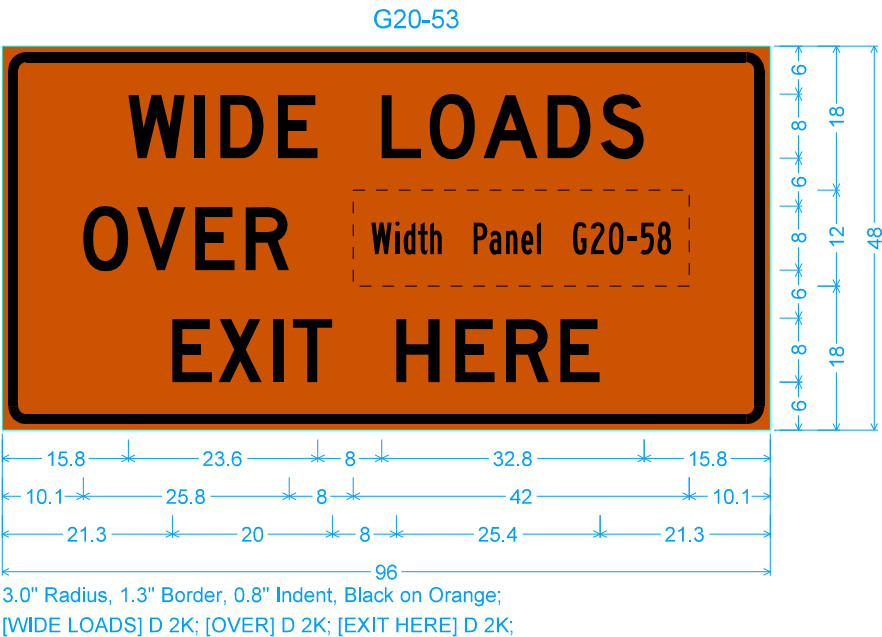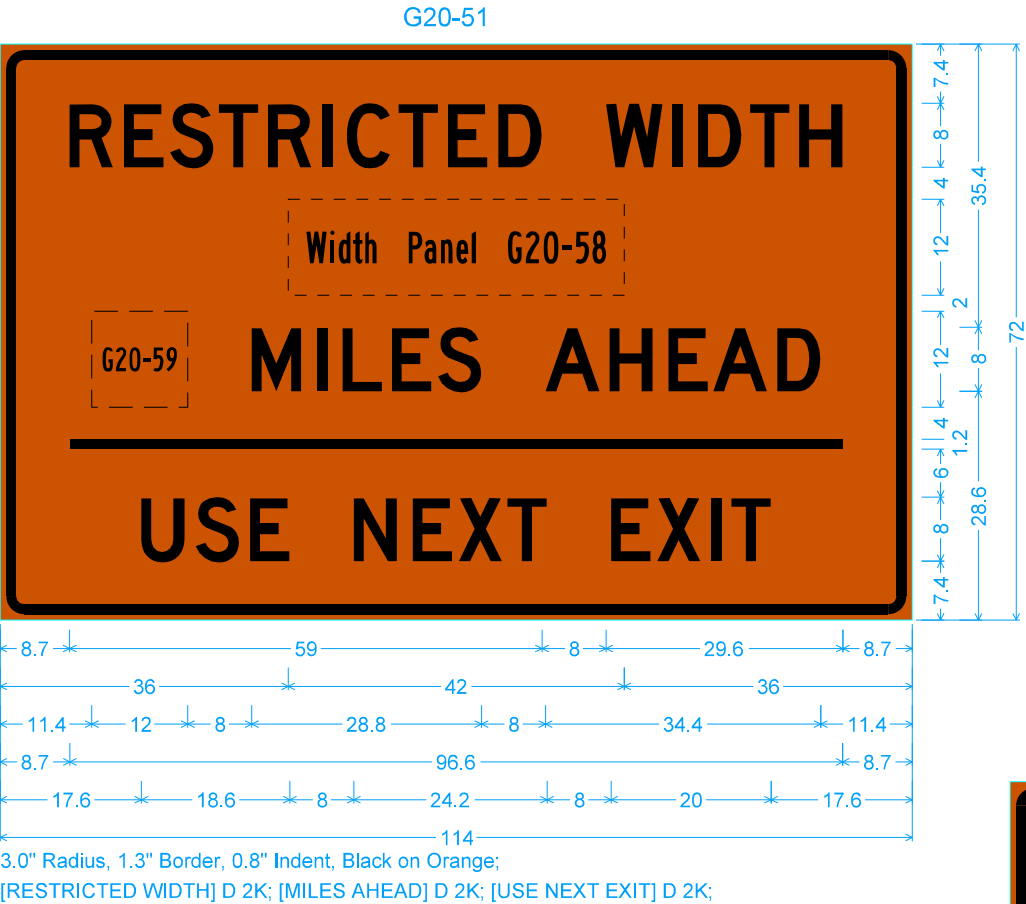

① See TC-81 for requirement of restricted width dimension.


 IOWA DOT	REVISION	
	1	10-18-16
	SI-882	
STANDARD ROAD PLAN	SHEET 1 of 2	
REVISIONS: Replaced old Iowa DOT logo with new logo.		
		
APPROVED BY DESIGN METHODS ENGINEER		
SPECIAL SIGNS FOR RESTRICTED WIDTH TRAFFIC CONTROL ZONES		

G20-52A

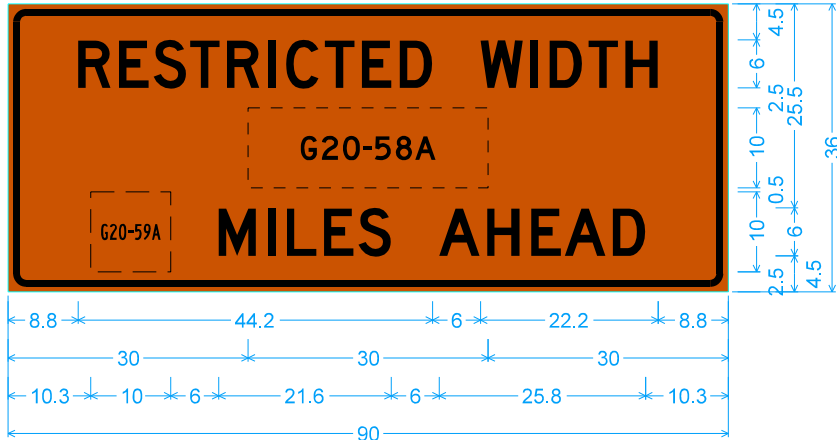


2.3" Radius, 0.9" Border, 0.6" Indent, Black on Orange;
[RESTRICTED WIDTH] D 2K; [MILES AHEAD] D 2K;

G20-53A

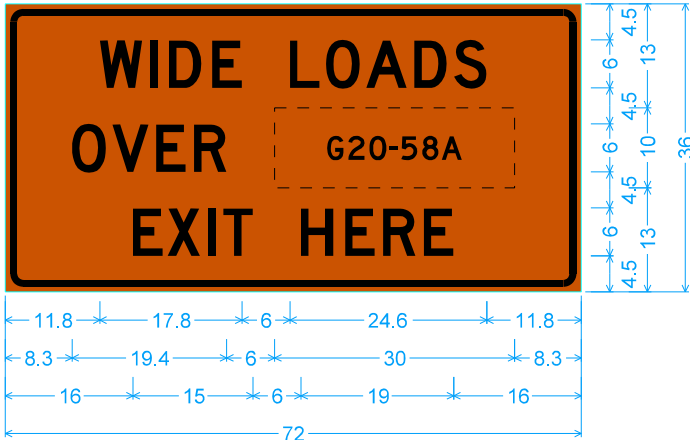


2.3" Radius, 0.9" Border, 0.6" Indent, Black on Orange;
[WIDE LOADS] D 2K; [OVER] D 2K;
[EXIT HERE] D 2K;

G20-54A

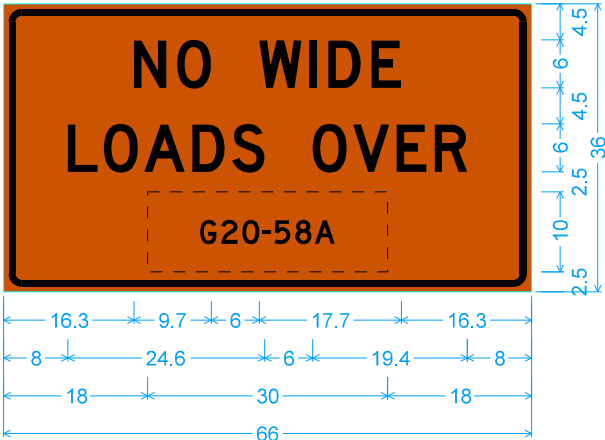


2.3" Radius, 0.9" Border, 0.6" Indent, Black on Orange;
[NO WIDE] D 2K; [LOADS OVER] D 2K;

G20-55A

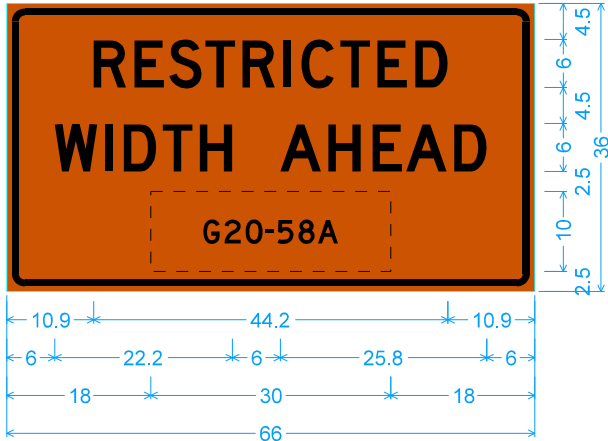


2.3" Radius, 0.9" Border, 0.6" Indent, Black on Orange;
[RESTRICTED] D 2K; [WIDTH AHEAD] D 2K;

G20-58A ①



No border, Orange;
[44'] Black D 2K;
[-] Black D 2K;
[4"] Black D 2K;

G20-59A



No border, Orange;
[4] Black D 2K;

① See [TC-81](#) for requirement of restricted width dimension.

 IOWA DOT	REVISION	
	1	10-18-16
	SI-882	
STANDARD ROAD PLAN	SHEET 2 of 2	
REVISIONS: Replaced old Iowa DOT logo with new logo.		
		
APPROVED BY DESIGN METHODS ENGINEER		
SPECIAL SIGNS FOR RESTRICTED WIDTH TRAFFIC CONTROL ZONES		