


PLAN VIEW

| TABLE OF QUANTITIES | | | | | | | | | | |
|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Standard Road Plan No. | PV-501 | PV-502 | PV-504 | PV-505 | PV-507 | PV-508 | PV-510 | PV-511 | PV-513 | PV-514 |
| Median Width | 50.0' | 50.0' | 64.0' | 64.0' | 68.24' | 68.24' | 82.0' | 82.0' | 100.0' | 100.0' |
| Crossover Pavement Width | 16.0' | 28.0' | 16.0' | 28.0' | 16.0' | 28.0' | 16.0' | 28.0' | 16.0' | 28.0' |
| Bid Item | | | | | | | | | | |
| 18" dia. Unclassified Entrance Pipe Culvert | 250' | 344' | 112' | 196' | 82' | 162' | 56' | 74' | 148' | 88' |

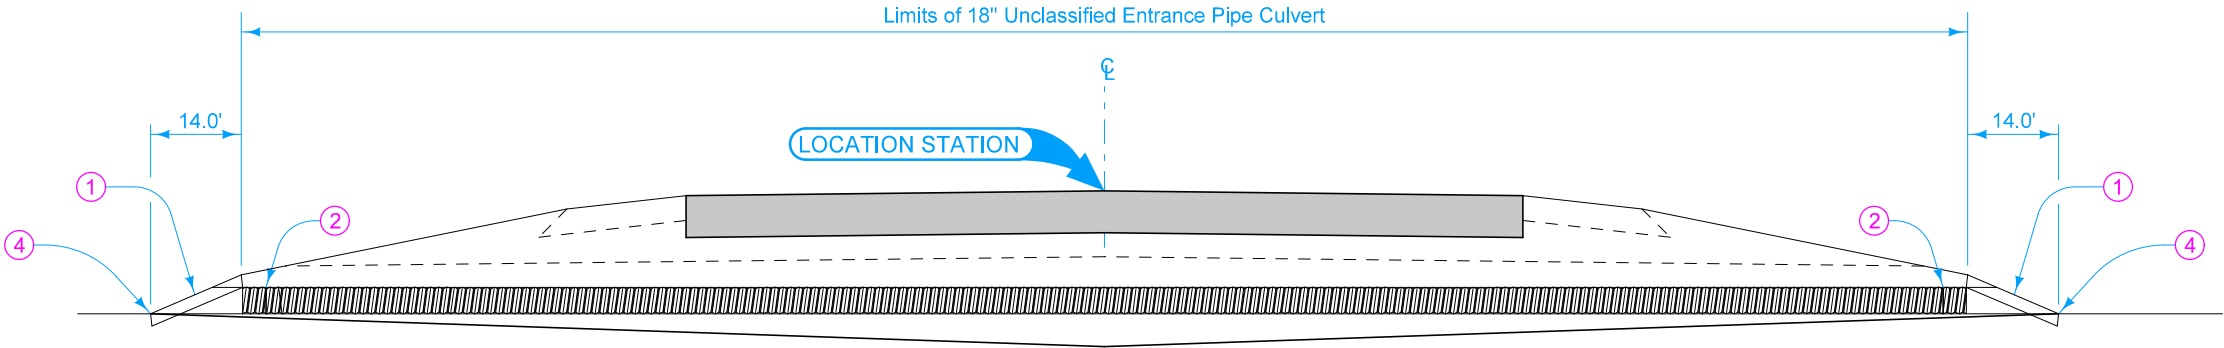

LONGITUDINAL SECTION AT PIPE CENTERLINE

- 1 Beveled pipe and guard. See Standard Road Plan DR-212.
- 2 Requires approximately 7 degree elbow.
- 3 Place the top edge of beveled pipe and guard at a point where the distance between the edges of the shoulders are approximately 22 feet apart.
- 4 Median ditch flow line.

Possible Contract Items:
Beveled Pipe and Guard
Culvert, Unclassified Entrance Pipe, 18" Dia.
Embankment-in-Place
Excavation, class 10, Roadway and Borrow
Special Backfill

Possible Tabulation:
112-8

STANDARD ROAD PLAN

REVISIONS: New.

APPROVED BY DESIGN METHODS ENGINEER

DIAGONAL PLACED DRAIN FOR
MEDIAN CROSSOVERS

REVISION

New04-21-20

DR-504

SHEET 1 of 1