



TYPICAL PLAN

NOTE:
ANCHOR BOLTS REQUIRED FOR FIXED PIER BEARINGS ONLY. FOR BOLT AND BEARING SIZES, SEE RS40-093-14, RS40-094-14 OR RS40-095-14.




**5ml & 5nl
BAR LAYOUT**

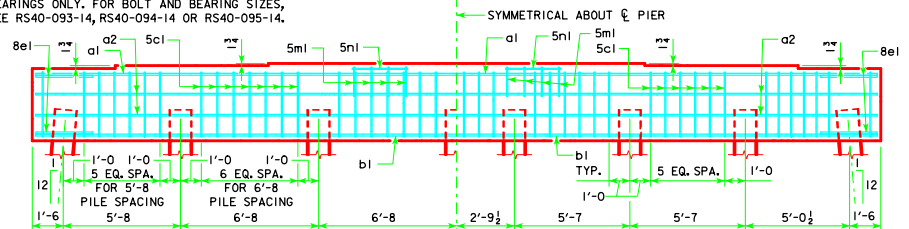


7 PILE BENT

8 PILE BENT

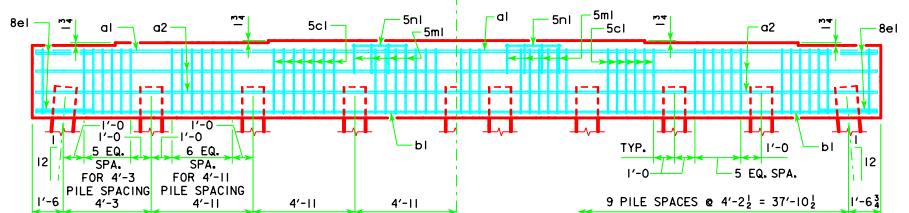


9 PILE BENT

10 PILE BENT

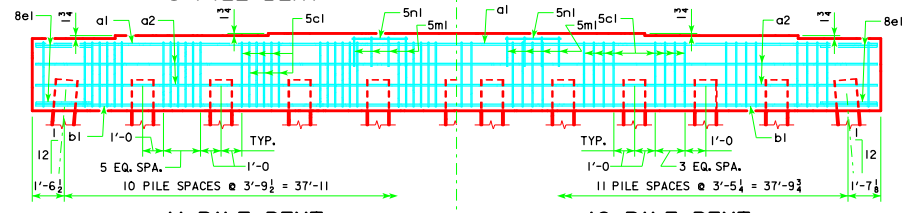


11 PILE BENT

12 PILE BENT

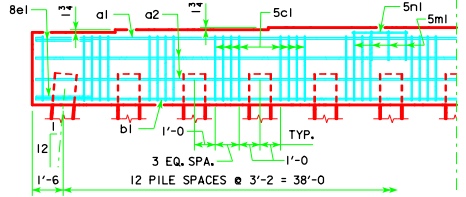

13 PILE BENT



VIEW A-A

FOR 7, 8, 9, 10, 11, 12 & 13 PILE BENTS

LATEST REVISION DATE	 APPROVED BY BRIDGE ENGINEER	 STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES ROLLED STEEL BEAM BRIDGES OCTOBER, 2014	
		PILE BENT PIERS HPI4 PILES 0° SKEW	RS40-098-14