

TYPICAL SECTION

CASE 1


- ① Precast (shown) or cast-in-place base:
  - Precast: 6 inch thick concrete with #6 welded wire mesh on 4 inch centers (WWF 4" x 4"). Center mesh vertically within base.
  - Cast-in-place: 8 inch thick non-reinforced concrete.
- ② 12 inch minimum riser height above all pipes.

INTAKE SIZE - CASE 1	
Outlet Pipe Diameter, D1	Minimum Riser Diameter, D2
12"	18"
15"	24"
18"	24"
21"	30"
24"	30"
27"	36"

FIGURE 6010.512 SHEET 1 OF 2

SUDAS	IOWADOT	REVISION
		2   10-21-14
FIGURE 6010.512	STANDARD ROAD PLAN	<b>SW-512</b>
		SHEET 1 of 2
REVISIONS: Deleted the flow arrow on sheet 2.		
Paul D. Wigand SUDAS DIRECTOR		Brian Smith DESIGN METHODS ENGINEER
<b>CIRCULAR AREA INTAKE</b>		

③ Minimum riser diameter is 18 inches.

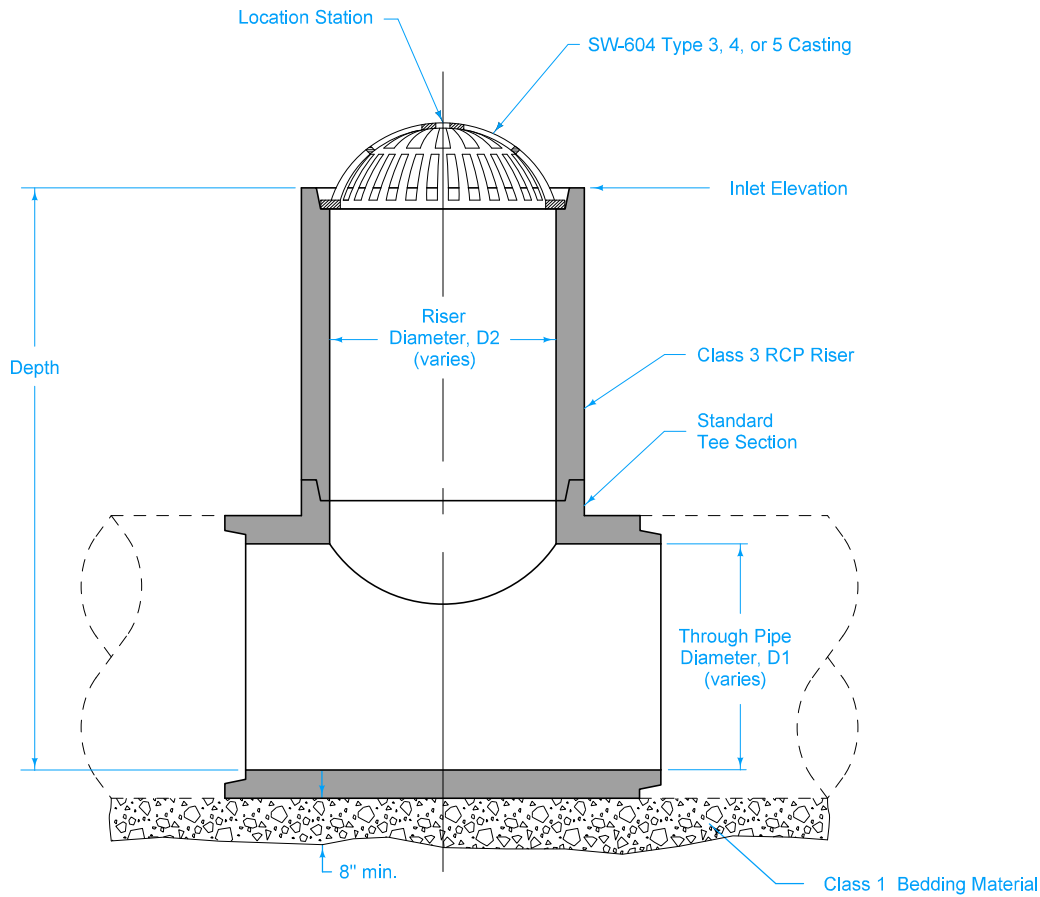

TYPICAL SECTION

CASE 2

INTAKE SIZE - CASE 2	
Through Pipe Diameter, D1	Maximum Riser Diameter, D2 ③
18"	18"
21"	18"
24"	24"
27"	24"
30"	30"
36" or more	36"

FIGURE 6010.512 SHEET 2 OF 2

SUDAS	IOWADOT	REVISION
		2   10-21-14
FIGURE 6010.512	STANDARD ROAD PLAN	<b>SW-512</b>
		SHEET 2 of 2
REVISIONS: Deleted the flow arrow on sheet 2.		
Paul D. Wigand SUDAS DIRECTOR		Brian Smith DESIGN METHODS ENGINEER
<b>CIRCULAR AREA INTAKE</b>		