


TEMPORARY RESIDENTIAL ACCESS

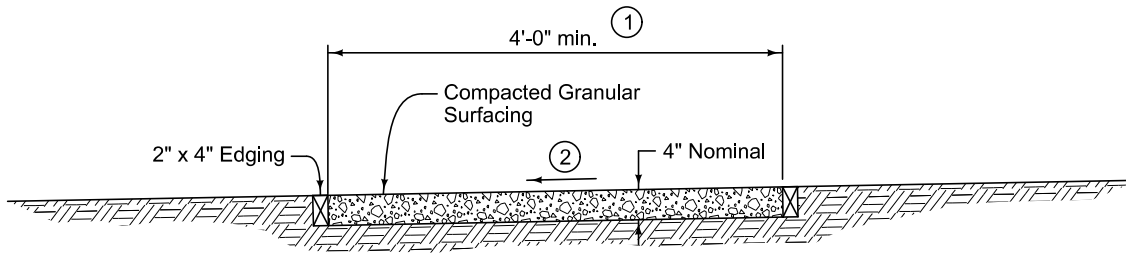

TEMPORARY GRANULAR SIDEWALK

- ① If sidewalk width is less than 5 feet, provide 5 foot long by 5 foot wide passing spaces at 200 foot intervals.
- ② Target cross slope of 1.5% with a maximum cross slope of 2%.

	REVISION
	New 10-20-15
	SUDAS 11050.101
SHEET 1 of 1	

SUDAS Standard Specifications

TEMPORARY GRANULAR SIDEWALK
AND
TEMPORARY RESIDENTIAL ACCESS