



REVISED 05-13 - REVISION FOR LRPD PILE DESIGN.

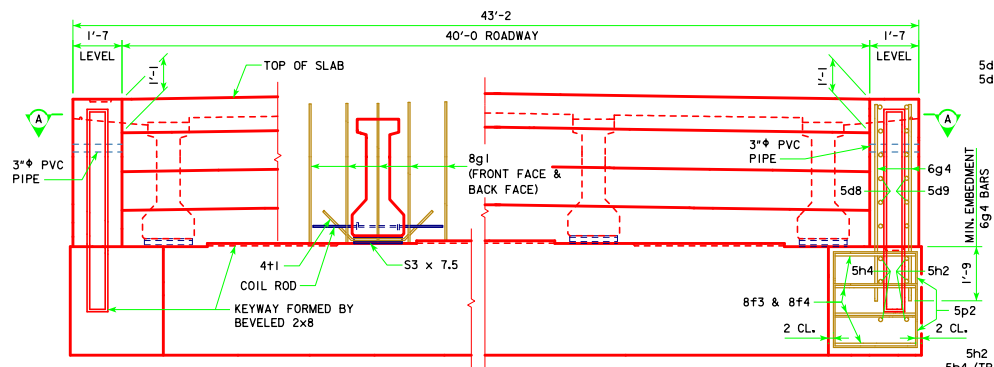

PART REAR ELEVATION AT ABUTMENT
NOTE: TOP OF ABUTMENT SHOWN FOR SOLID BARRIER RAIL

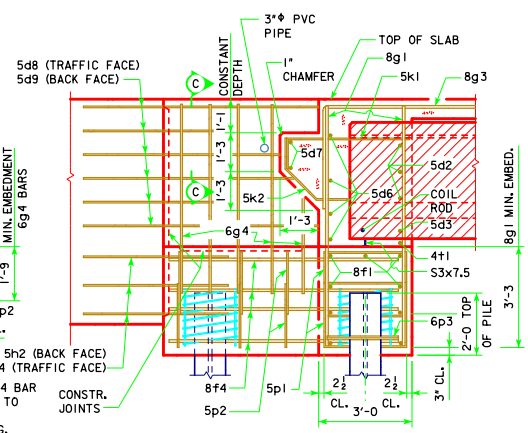

PART SECTION B-B

ABUTMENT NOTES:
MINIMUM CLEAR DISTANCE FROM FACE OF CONCRETE TO NEAR REINFORCING BAR IS TO BE 2" UNLESS OTHERWISE NOTED OR SHOWN.


IF NECESSARY TO PREVENT DAMAGE TO THE END OF THE BRIDGE DECK OR BACKWALL FROM CONSTRUCTION EQUIPMENT, AN APPROPRIATE METHOD OF PROTECTION APPROVED BY THE ENGINEER SHALL BE PROVIDED BY THE BRIDGE CONTRACTOR AT NO EXTRA COST TO THE COUNTY OR STATE.

ABUTMENT PILES SHALL BE DRIVEN TO VALUES SHOWN IN DESIGN PLANS.


BARRIER RAIL NOT SHOWN IN DETAILS.

IF ROCK IS CLOSER THAN 15' BELOW ABUTMENT FOOTING, SPECIAL ANALYSIS MAY BE REQUIRED.


NOTE:
THE SPIRAL AT THE TOP OF EACH PILE TO BE 7 TURNS OF NO. 2 BAR, 21" DIAMETER, 3" PITCH WITH 3 - 1/2" x 1/4" SPACERS PUNCHED TO HOLD SPIRAL.

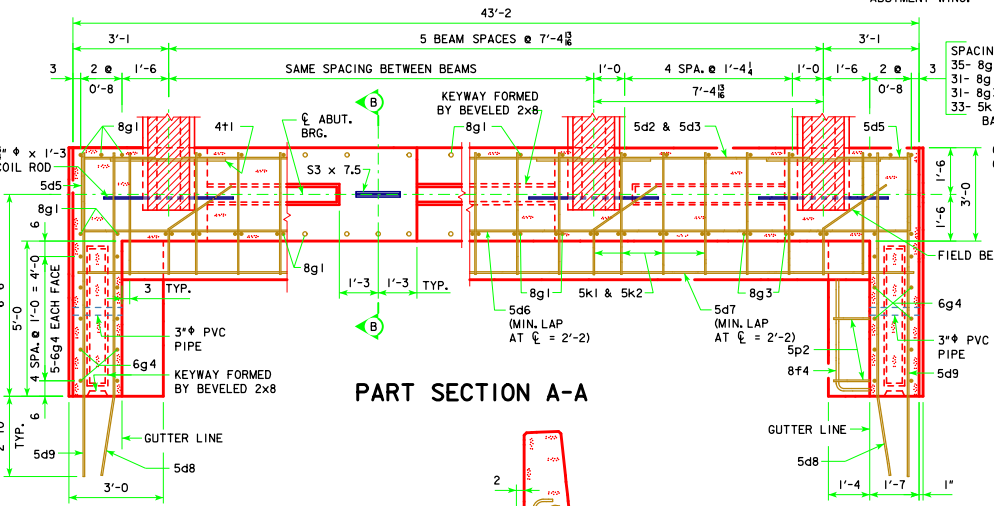

PART SECTION A-A

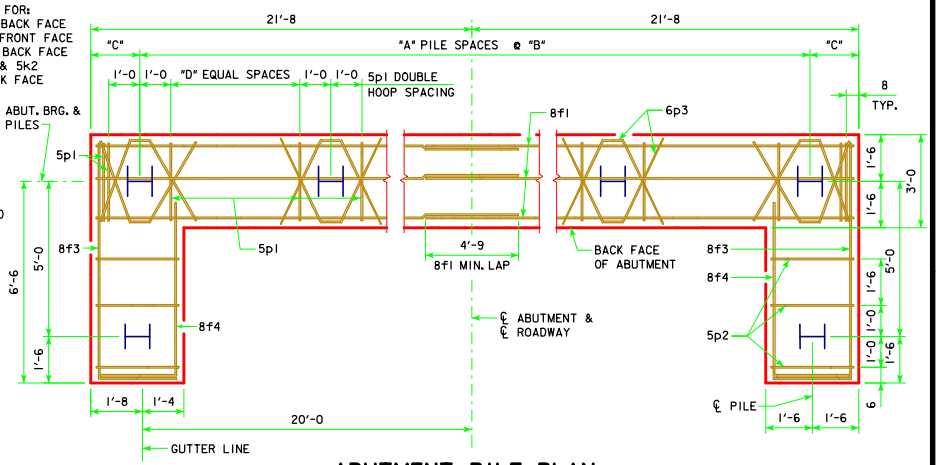

ABUTMENT PILE PLAN



PART SECTION C-C
* NOTE: SEE BARRIER RAIL SHEET FOR DETAILS. REINFORCING BARS 5c3 AND 5c14 ARE INCLUDED IN SUPERSTRUCTURE QUANTITIES.

ABUTMENT PILE SPACING		201'-4"	213'-10"	226'-4"	243'-0"
WITH STEEL H-PILES	*A* PILE SPACES	7	7	7	8
	B (FT. - IN.)	5'-6"	5'-6"	5'-6"	4'-10"
	C (FT. - IN.)	2'-5"	2'-5"	2'-5"	2'-4"
	D EQUAL SPACES	3	3	3	3
	NO. OF PILES PER ABUT.	10	10	10	11
PU, STRENGTH I DESIGN LOAD (KIPS)		136	140	145	136

NOTE: PU, STRENGTH I DESIGN LOAD (KIPS) IS NOT THE VALUE USED IN THE FIELD FOR DRIVING PILES.

LATEST REVISION DATE
05-13
APPROVED BY BRIDGE ENGINEER
Thomas E. McQuinn

Iowa Department of Transportation
Highway Division

STANDARD DESIGN - 40' ROADWAY, THREE SPAN BRIDGE
PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES
AUGUST, 2009

ABUTMENT DETAILS
0° SKEW C BEAMS

H40-06-06