




W4-2M;  
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;  
[MERGE] C 2K;  
Standard Arrow Custom 29.25" X 13.50" 180°;

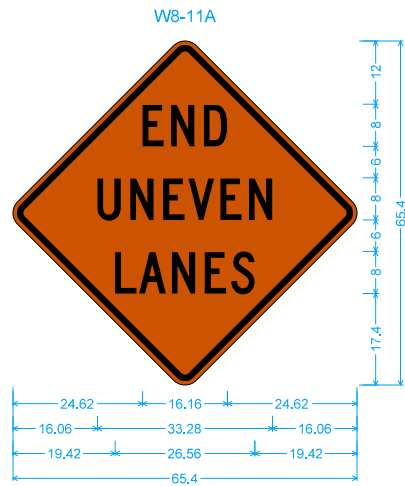


W8-11A;  
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;  
[END] C 2K; [UNEVEN] C 2K; [LANES] C 2K;

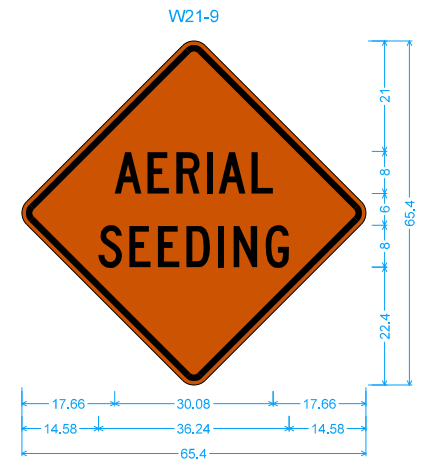

W21-9;  
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;  
[AERIAL] C 2K; [SEEDING] C 2K;






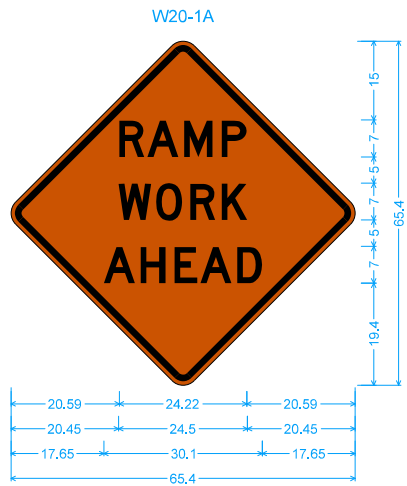


W20-1A;  
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;  
[RAMP] D 2K; [WORK] D 2K; [AHEAD] D 2K;





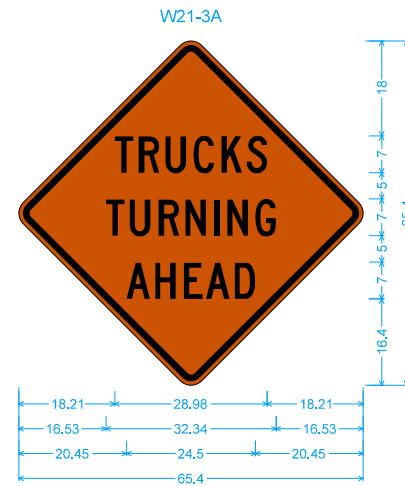




W21-3A;  
48.00" across sides 3.00" Radius, 1.25" Border, 0.75" Indent, Black on Orange;  
[TRUCKS] C 2K; [TURNING] C 2K;  
[AHEAD] C 2K;

	REVISION	
	4	10-18-16
<b>STANDARD ROAD PLAN</b>	<b>SI-881</b>	
	SHEET 1 of 3	
REVISIONS: Replaced old Iowa DOT logo with new logo.		
APPROVED BY DESIGN METHODS ENGINEER		
<b>SPECIAL SIGNS FOR WORKZONES</b>		

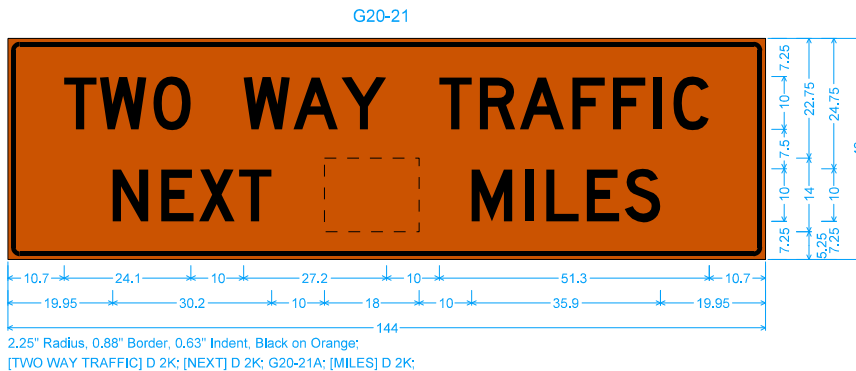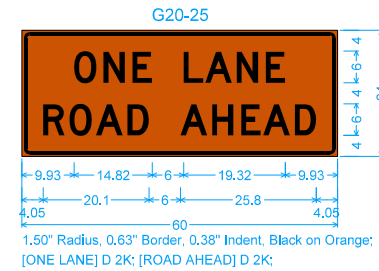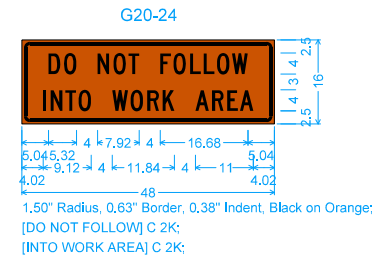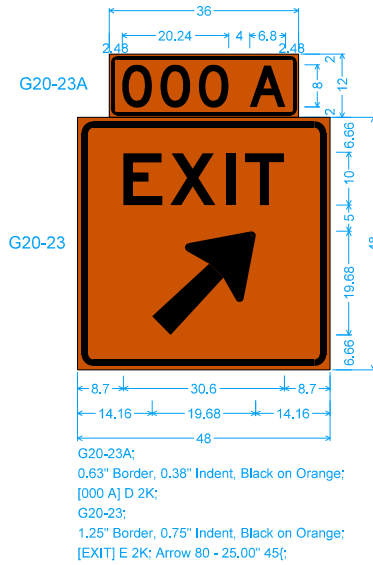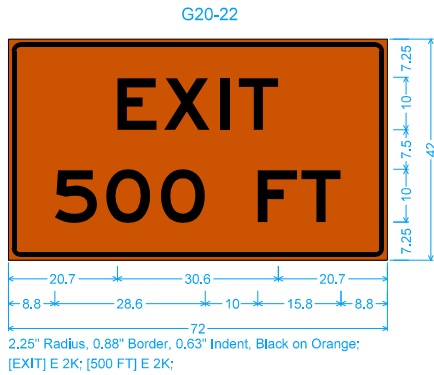

	REVISION
	4   10-18-16
STANDARD ROAD PLAN	SI-881
SHEET 2 of 3	
REVISIONS: Replaced old Iowa DOT logo with new logo.	
APPROVED BY DESIGN METHODS ENGINEER	
<b>SPECIAL SIGNS FOR WORKZONES</b>	

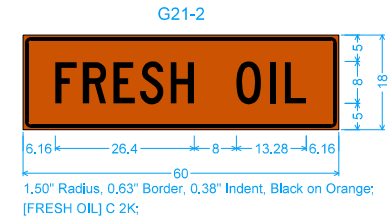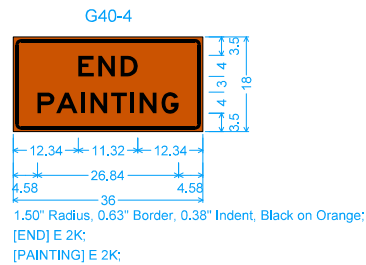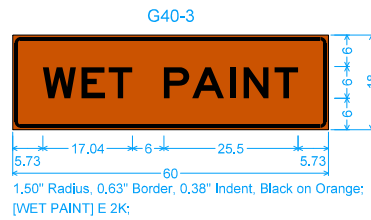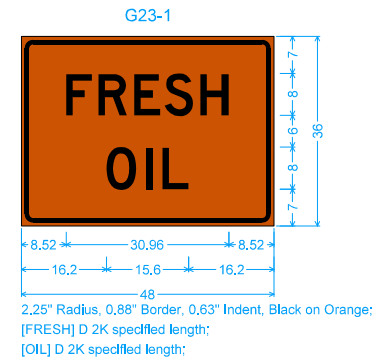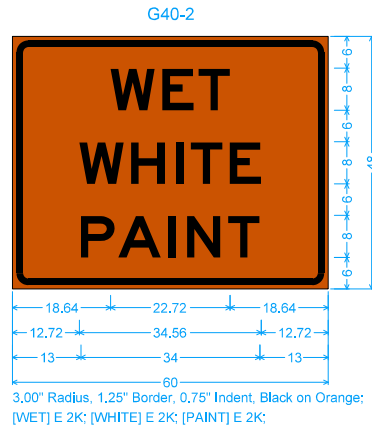

	REVISION	
	4	10-18-16
<b>STANDARD ROAD PLAN</b>	<b>SI-881</b>	
	SHEET 3 of 3	
REVISIONS: Replaced old Iowa DOT logo with new logo.		
 APPROVED BY DESIGN METHODS ENGINEER		
<b>SPECIAL SIGNS FOR WORKZONES</b>		