




REVISION: 09-14 - CHANGED RUNWAY SUPPORT BRACKET DIMENSIONS, CHANGED U-BOLT BEND DIAMETER, STEELOVERHEADSIGNTRUSS.DGN - SOST-13-11 - THIS SHEET ISSUED 03-13.




**TYPICAL STIFFENER  
DETAIL**




**SECTION L-L  
TYPICAL RUNWAY SECTION**

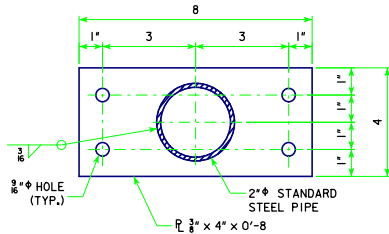


**HANDRAIL POST BASE PLATE**

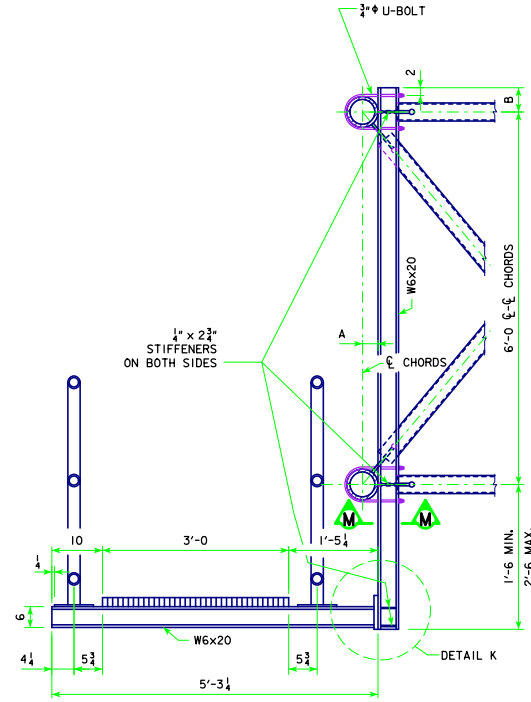


**END ELEVATION OF  
HANDRAIL POST BASE**



**SECTION M-M**

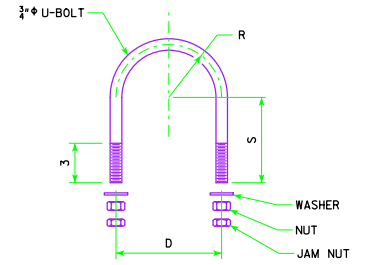

**U-BOLT DETAIL**

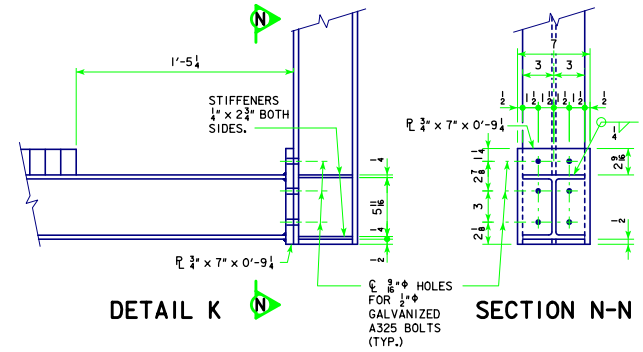

**DETAIL K**

**SECTION N-N**

**DIMENSION TABLE**

SPAN	TRUSS CHORD	A	B	U-BOLT DIMENSIONS		
				D	R	S
50' - 100'	5" EXTRA-STRONG STEEL PIPE	2 3/8"	5 1/2"	6 1/8"	3 3/8"	11 1/2"
105' - 130'	6" EXTRA-STRONG STEEL PIPE	3 3/8"	5 1/2"	7 1/2"	3 3/8"	12"

NOTE: SEE STANDARD SHEET SOST-12-11 FOR LOCATION OF SECTION L-L.

09-14 LATEST REVISION DATE  <i>Thomas E. McQuinn</i> APPROVED BY BRIDGE ENGINEER	
	STANDARD DESIGN <b>STEEL OVERHEAD SIGN TRUSS</b> SEPTEMBER, 2011
	DMS RUNWAY DETAILS 50'-130' SPANS