



TEMPORARY RESIDENTIAL ACCESS

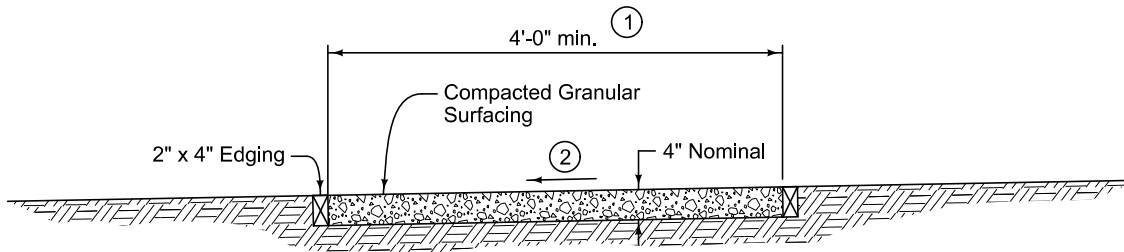

TEMPORARY GRANULAR SIDEWALK

- ① If sidewalk width is less than 5 feet, provide 5 foot long by 5 foot wide passing spaces at 200 foot intervals.
- ② Target cross slope of 1.5% with a maximum cross slope of 2%.

	REVISION
	1   10-18-16
	<b>SUDAS</b> <b>11040.101</b>
SHEET 1 of 1	
SUDAS Standard Specifications	
TEMPORARY GRANULAR SIDEWALK AND TEMPORARY RESIDENTIAL ACCESS	