



ELEVATION
(KEYWAY NOT SHOWN FOR CLARITY)

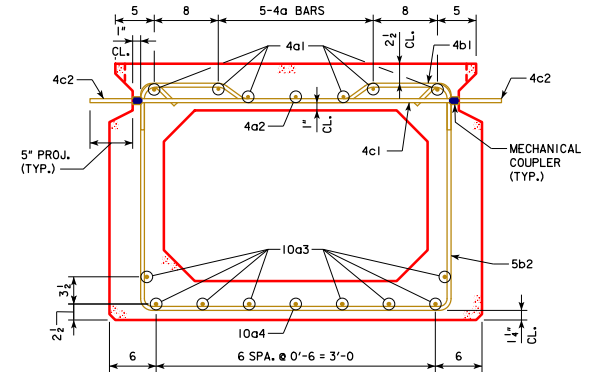

SECTION A-A

NOTE:
OMIT KEYWAY, MECHANICAL COUPLERS, AND 4c2 BARS ON EXTERIOR FACE OF EXTERIOR BEAMS.

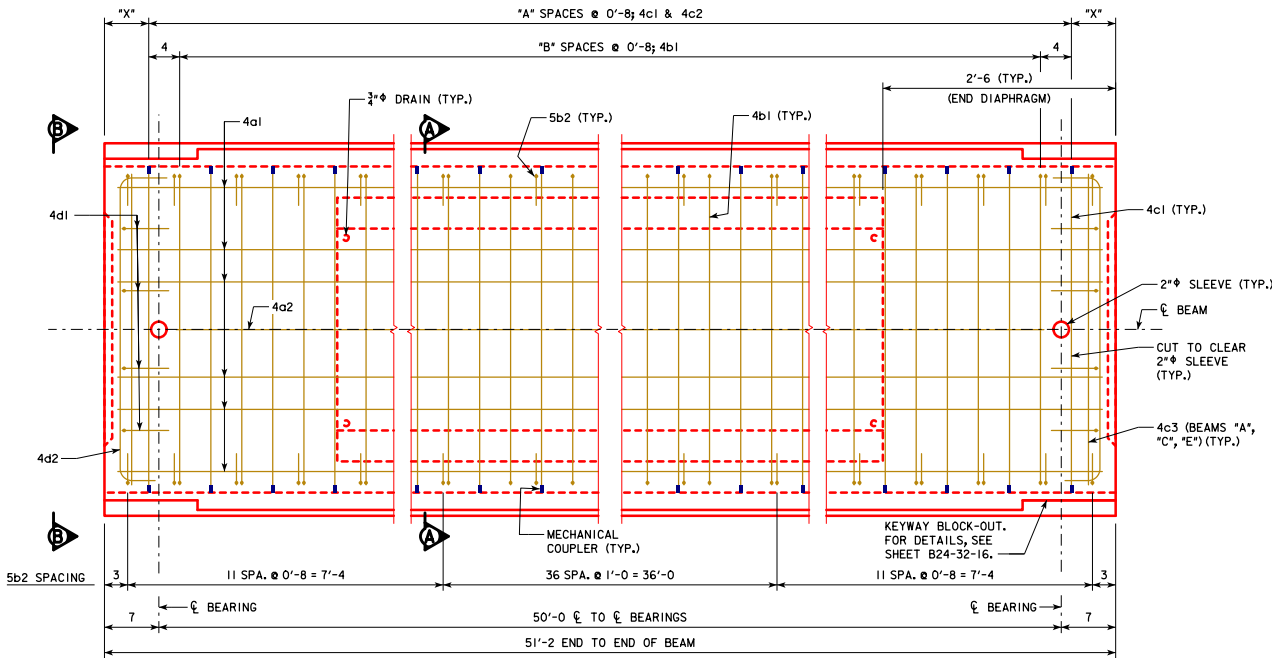

PLAN
(INTERIOR BEAM SHOWN, EXTERIOR BEAM SIMILAR)
(10a BARS IN BOTTOM SLAB AND 4c2 BARS NOT SHOWN FOR CLARITY)

TABLE OF DIMENSION DATA			
BEAM LINE	"X" (INCHES)	"A" (SPACES)	"B" (SPACES)
A	7	75	74
B	3	76	75
C	7	75	74
D	3	76	75
E	7	75	74
F	3	76	75

NOTE:
FOR BEAM LINE DESIGNATIONS, SEE SHEET B24-06-16.

NOTES:
FOR VIEW B-B, SEE SHEET B24-59-16.
FOR BEAM CHAMFER DETAILS, SEE SHEET B24-33-16.

LATEST REVISION DATE	<i>Norman E. M. Dwyer</i> APPROVED BY BRIDGE ENGINEER	
		STANDARD DESIGN - 24'-0" ROADWAY, SINGLE SPAN CONCRETE BOX BEAM BRIDGES
		DECEMBER, 2016
33" x 48" x 50'-0" RCBB DETAILS 0° SKEW		B24-60-16