

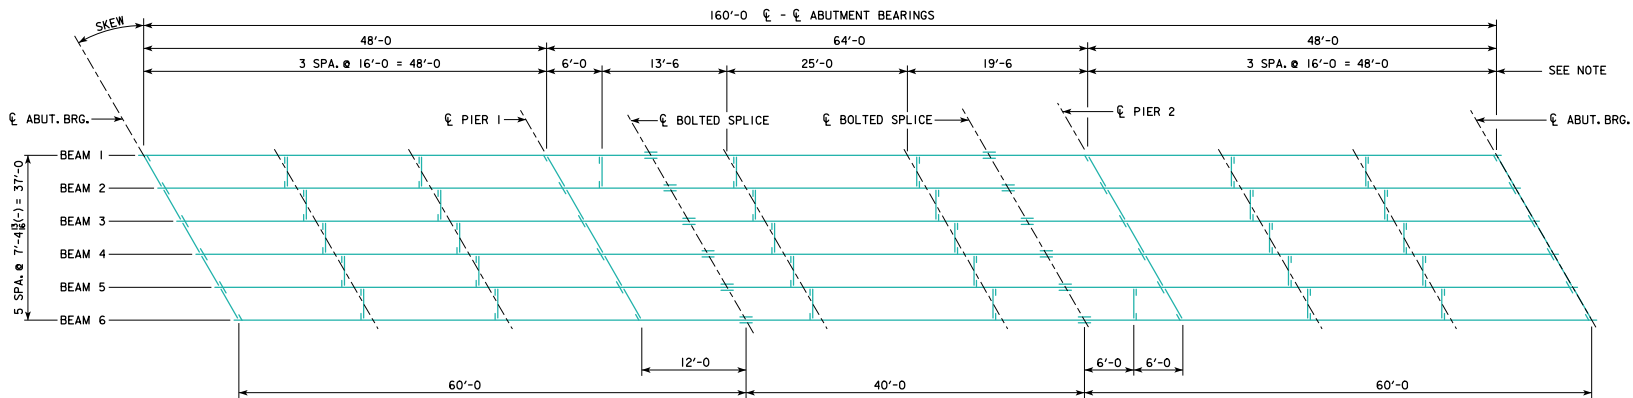


REV/ISED 02-2017 - ADDED DIAPHRAGMS TO SKEWED FRAMING PLAN IN OUTER BAYS, BETWEEN BEAMS 1 & 2 AND 5 & 6 OF 64'-0" CENTER SPAN, 6'-0" FROM PIER CENTERLINES.

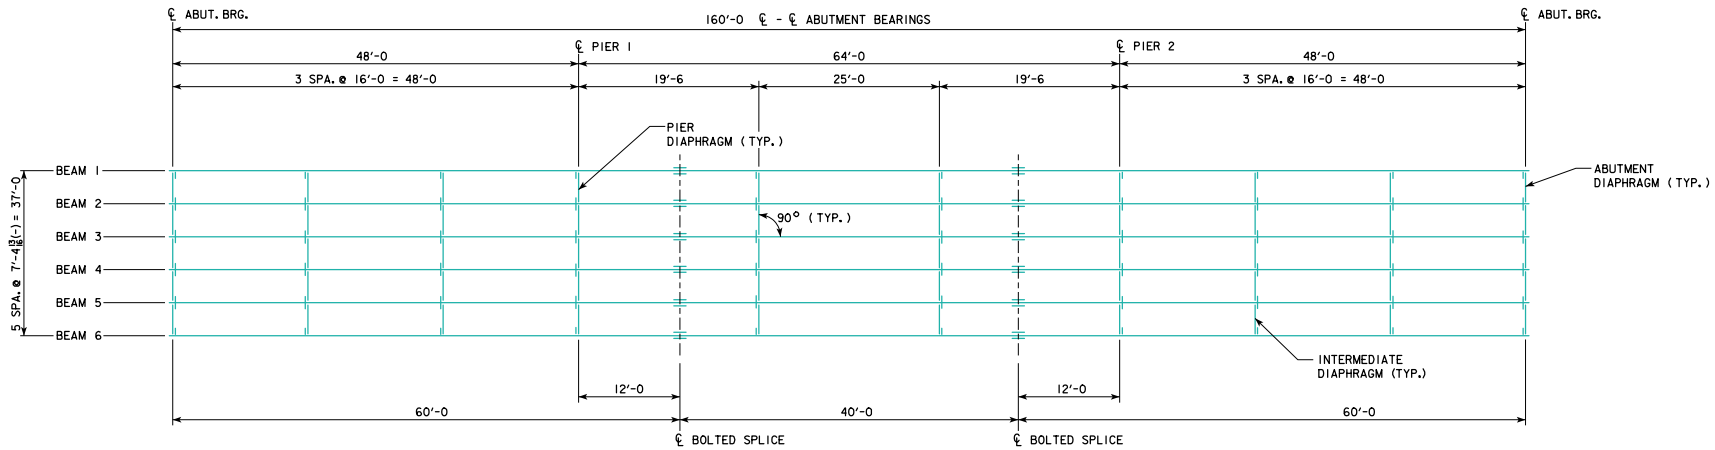

NOTE:
DIMENSIONS SHOWN APPLY
AT INTERSECTION OF EXT.
BEAM AND DIAPHRAGM



SKEW	a (FT.-IN.)
10°	1'-3 $\frac{1}{8}$ "
20°	2'-8 $\frac{3}{8}$ "
30°	4'-3 $\frac{1}{4}$ "

02-2017 LATEST REVISION DATE	<i>Norman E. Mc Donald</i> APPROVED BY BRIDGE ENGINEER		
		STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES ROLLED STEEL BEAM BRIDGES OCTOBER, 2014	
		FRAMING PLAN 160'-0 BRIDGE	RS40-041-14