



SECTION C-C
(KEYWAY NOT SHOWN FOR CLARITY)

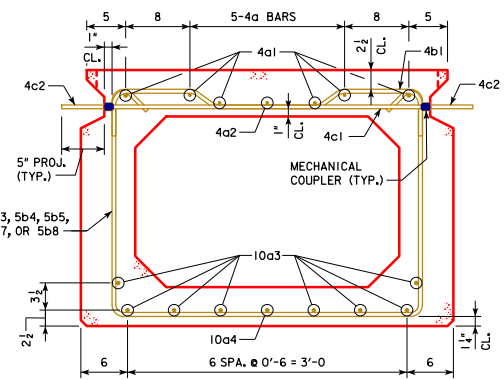

SECTION A-A

NOTES:
OMIT KEYWAY, MECHANICAL COUPLERS, AND 4c2 BARS ON EXTERIOR FACE OF EXTERIOR BEAMS.

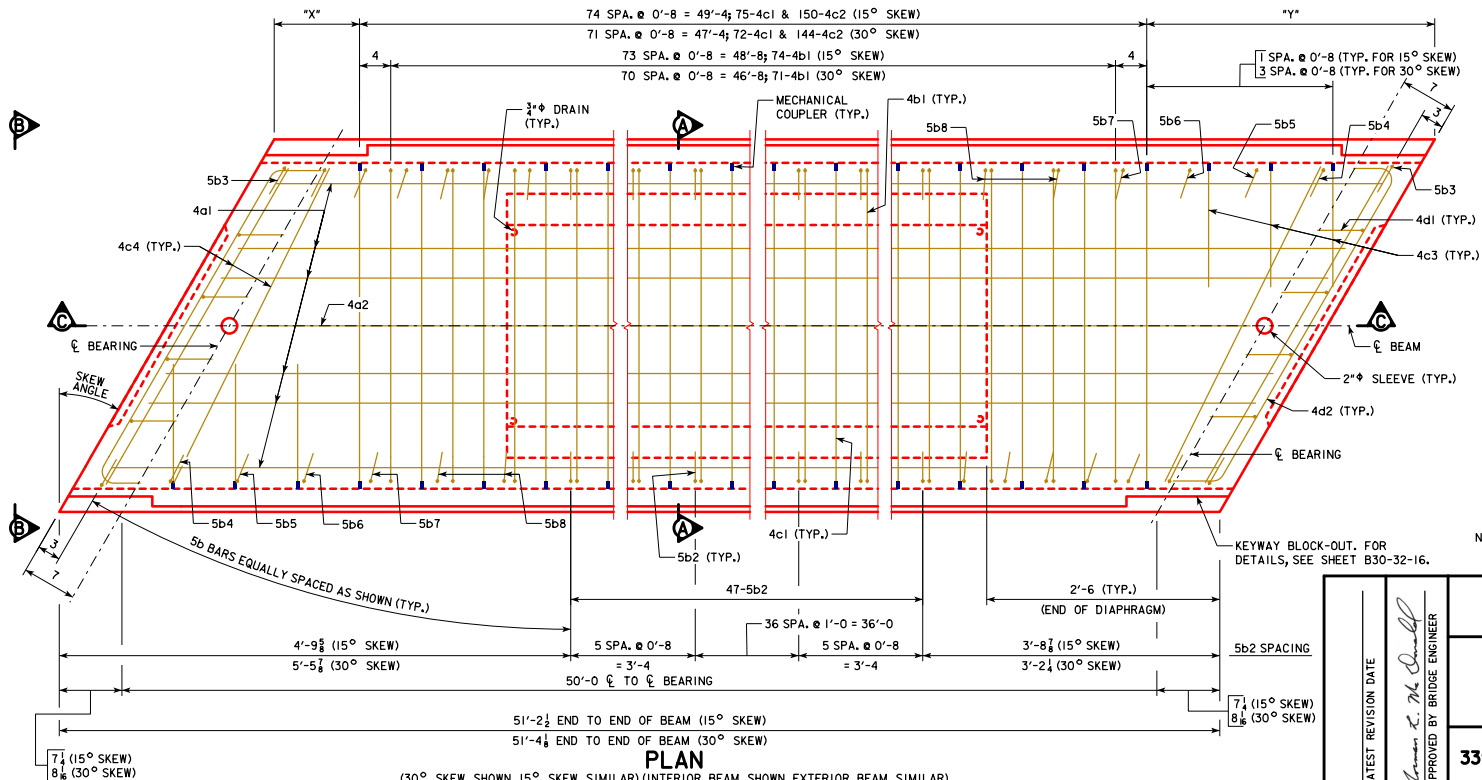

PLAN

(30° SKEW SHOWN, 15° SKEW SIMILAR) (INTERIOR BEAM SHOWN, EXTERIOR BEAM SIMILAR)
(10a BARS IN BOTTOM SLAB AND 4c2 BARS NOT SHOWN FOR CLARITY)

TABLE OF DIMENSION DATA

BEAM LINE	15° SKEW		30° SKEW	
	x	*y*	*x*	*y*
A	1 1/2	1'-8 1/2	11 1/4	3'-0 1/4
B	2 3/8	1'-7 1/4	10 1/4	3'-1 1/4
C	3 1/2	1'-7	10 3/8	3'-1 1/2
D	4 3/8	1'-5 5/8	10 3/8	3'-1 3/4
E	5 1/4	1'-5 1/4	10	3'-2 1/4
F	6 1/4	1'-4 3/8	9 3/4	3'-2 3/8
G	7	1'-3 1/2	9 1/2	3'-2 3/8
H	7 1/2	1'-2 3/8	9 1/4	3'-2 1/2

NOTE:
FOR BEAM LINE DESIGNATIONS, SEE SHEET B30-06-16.

NOTES:
FOR VIEW B-B, SEE SHEET B30-59-16.
FOR BEAM CHAMFER DETAILS, SEE SHEET B30-33-16.

LATEST REVISION DATE
Thomas E. M. Donnell
APPROVED BY BRIDGE ENGINEER

IOWADOT Highway Division

STANDARD DESIGN - 30'-0 ROADWAY, SINGLE SPAN
CONCRETE BOX BEAM BRIDGES

DECEMBER, 2016

33' x 48' x 50'-0 RCBB DETAILS
15° AND 30° SKEW

B30-61-16