


Project Information/Paver Inspection


Date	Project Number		Contract Number
Location			County
Project Inspector		Paving Foreman	
Type/Model of Paver			
Type/Mounting Location of Tie-Bar Inserter			
Location of Tie-Bar Inserter from Pavement I	Edge		

Note: If any information changes during the project, a new form needs to be completed.

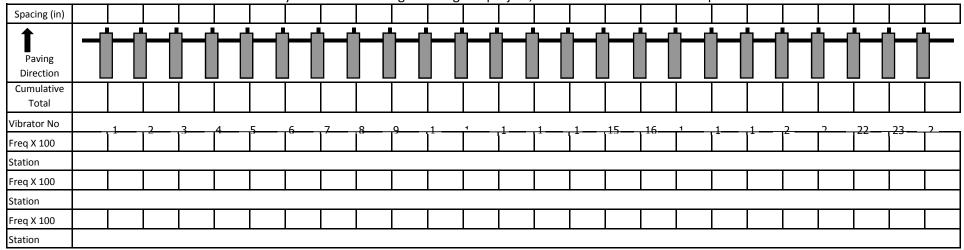

General Notes:

- 1. Spec Limits Refer to specification 2301.
- 2. Spacing not to exceed 16". Centerline spacing may be increased to 30" max due to physical limitations of paver such as mounting bracket locations; spacing should not be increased for tie steel insertion or lack of adequate number of vibrators.
- 3. When vibration monitoring is used, check and record frequency on a minimum of two vibrators daily.
- 4. When vibration monitoring is not used, check and record frequency of each vibrator twice daily.



Angle	(A)=	
Depth (in.)	(D)=	