

Grading Surface:

Refer to berm slope location table in project plans for locations of A, B, W and possible other points.


1 Variable slope.


② Bridge Berm slope may vary and is determined by the A and B points. Slope is normally 2.5:1 or flatter.


3 Refer to contract documents for limits of the slope protection.



BRIDGE BERM GRADING WITHOUT RECOVERABLE SLOPE (NON-BARNROOF SECTION)

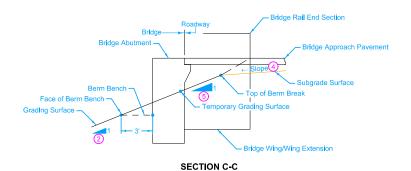

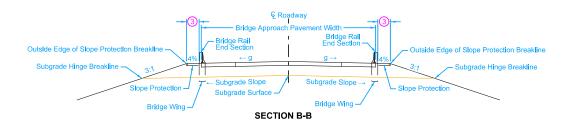

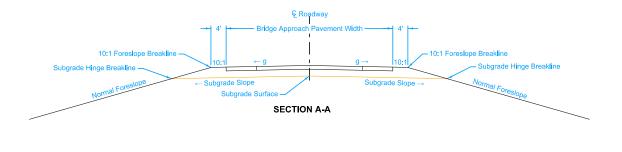

- ② Bridge Berm slope may vary and is determined by the A and B points.
- Refer to contract documents for limits of the slopeprotection.
- 4 Refer to BR series for longitudinal subgrade slope.
- 5 Temporary grading slope.
- g = Pavement cross slope.



This image can be viewed in 3D on the the ERL or at our website http://www.iowadot.gov/design/stdrdpln.htm	
	STANDARD POAD BLAN
	STANDARD ROAD PLAN

WITHOUT RECOVERABLE SLOPE (NON-BARNROOF SECTION)