



REVISED 06-12 - I.M. REQUIREMENT ADDED TO BAR CHAIR NOTE.

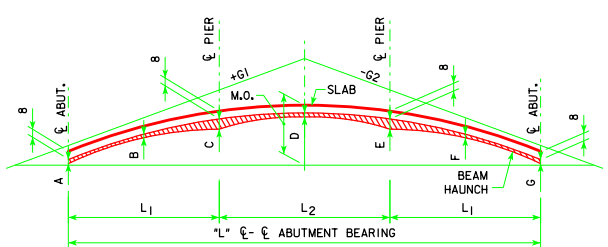

℄-℄ ABUT. BRG. "L"	A ABUT.	B	℄ PIER	D	℄ PIER	F	G ABUT.
138'-10	1/8	1/2	1 1/2	2	1 1/2	1/2	1/8
151'-4	3/8	1	1 1/2	2	1 1/2	3/8	3/8
163'-10	1/2	1 1/2	2	2	2	1/2	1/2
176'-4	3/4	2	2 1/2	2 1/2	2 1/2	3/4	3/4
188'-10	1	2 1/2	3	3	3	1	1
201'-4	1 1/4	3 1/2	3 1/2	3 1/2	3 1/2	1 1/4	1 1/4
213'-10	1 1/2	4	4	4	4	1 1/2	1 1/2
226'-4	1 3/4	4 1/2	4 1/2	4 1/2	4 1/2	1 3/4	1 3/4
243'-0	2	5	5	5	5	2	2

LENGTH OF VERTICAL CURVE REQUIRED =  $(20,000 \times G1 - G2)$   
 $M.O. = \frac{(G1 - G2) \times \text{LENGTH OF V.C.}}{8}$   
 (G1-G2) IS THE ALGEBRAIC DIFFERENCE OF THE APPROACH GRADES EXPRESSED IN DECIMAL FORM. G1 NEED NOT HAVE THE SAME VALUE AS G2. MAXIMUM VALUE OF G1 OR G2 IS 5%. LENGTH OF CURVE AND M.O. ARE IN FEET.


**SLAB AND HAUNCH THICKNESS AT BEAMS FOR VERTICAL CURVE**

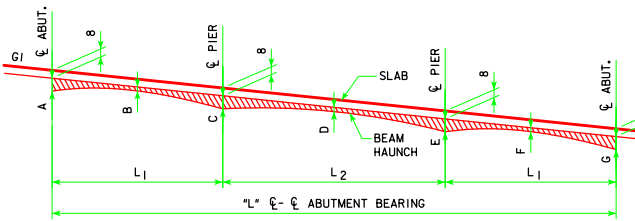

℄-℄ ABUT. BRG. "L"	A ABUT.	B	℄ PIER	D	℄ PIER	F	G ABUT.
138'-10	1/8	1/2	1 1/2	2	1 1/2	1/2	1/8
151'-4	3/8	1	1 1/2	2	1 1/2	3/8	3/8
163'-10	1/2	1 1/2	2	2	2	1/2	1/2
176'-4	3/4	2	2 1/2	2 1/2	2 1/2	3/4	3/4
188'-10	1	2 1/2	3	3	3	1	1
201'-4	1 1/4	3 1/2	3 1/2	3 1/2	3 1/2	1 1/4	1 1/4
213'-10	1 1/2	4	4	4	4	1 1/2	1 1/2
226'-4	1 3/4	4 1/2	4 1/2	4 1/2	4 1/2	1 3/4	1 3/4
243'-0	2	5	5	5	5	2	2


G1 MAY HAVE A + OR - SIGN. THE MINIMUM NUMERICAL VALUE OF THE GRADE IS 0.3% AND THE MAXIMUM VALUE IS 5%.

**SLAB AND HAUNCH THICKNESS AT BEAMS FOR STRAIGHT GRADE**

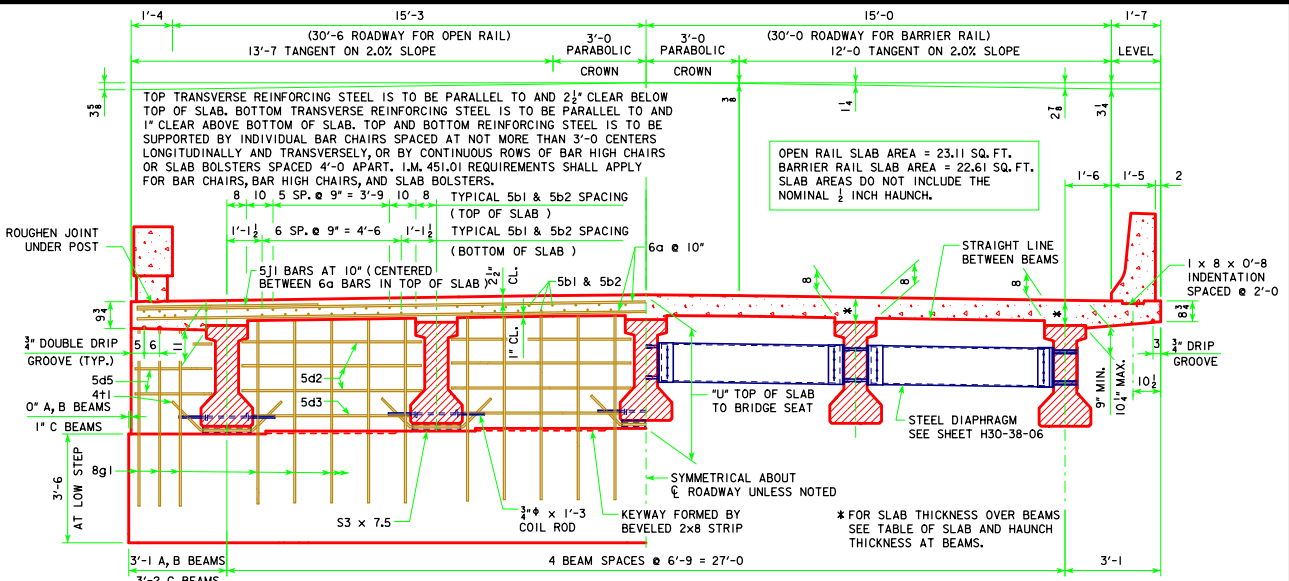

**HALF SECTION NEAR ABUTMENT (OPEN RAIL SHOWN)**

**HALF SECTION NEAR MID SPAN (BARRIER RAIL SHOWN)**

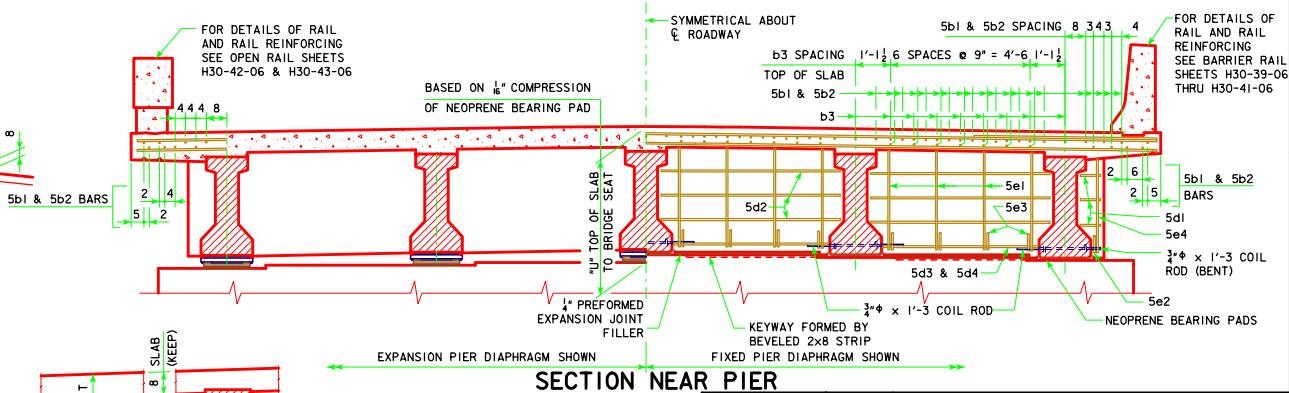

**SLAB THICKNESS DETAILS**

NOTE: THE SLAB THICKNESS (T) AT THE BEAMS, (8" SLAB PLUS HAUNCH) IS BASED ON THE ANTICIPATED BEAM CAMBER REMAINING AFTER PLACING THE SLAB, BUT IS NOT GUARANTEED FOR CONSTRUCTION. IF BEAM IS UNDER CAMBERED INCREASE THE HAUNCH THICKNESS OVER THE BEAM AT THE MIDPOINT OF THE SPANS (POINTS B, D AND F). IF THE BEAM IS OVER CAMBERED DECREASE THE HAUNCH THICKNESS OVER THE BEAM AT THE MIDPOINT OF THE SPANS (POINTS B, D AND F) TO A MAXIMUM OF 1/2" EMBEDMENT IN THE SLAB. IF MORE THAN 1/2" EMBEDMENT IS REQUIRED OR IF THE HAUNCH EXCEEDS 2 1/2" THE GRADE LINE IS TO BE REVISED.

**LENGTH OF S3x7.5 (ABUTMENT BEAM SEAT)**

BEAM BOTTOM FLANGE WIDTH	LENGTH OF S3 x 7.5
1'-5	1'-3 1/2
1'-8	1'-6 1/2

**Iowa Department of Transportation Highway Division**  
 STANDARD DESIGN - 30' ROADWAY, THREE SPAN BRIDGES  
**PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES**  
 DECEMBER, 2006

**SUPERSTRUCTURE DETAILS H30-03-06**

LATEST REVISION DATE: 06-12  
 APPROVED BY BRIDGE ENGINEER: *Thomas E. M. Dwyer*