
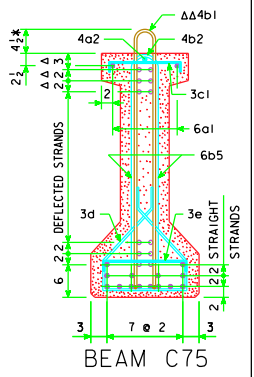
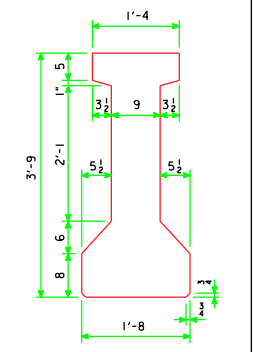
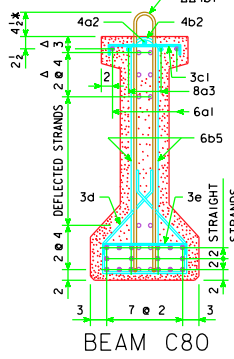
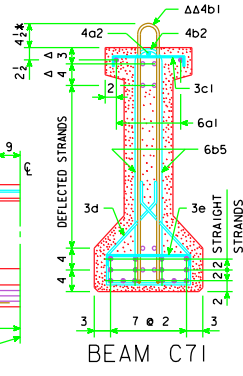
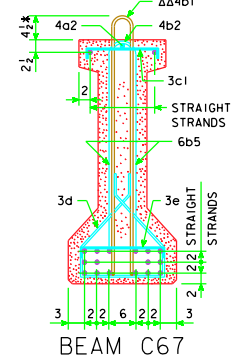


REVISED 07-10 - THE SPECIFICATION REFERENCES WERE CHANGED. THE BEAM DATA WAS UPDATED TO THE CURRENT BEAMS.

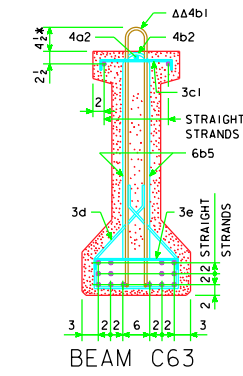

NOTE: BARS 3d ARE TO BE PLACED IN PAIRS.
 * KEEP
 Δ DIMENSIONS AT END OF BEAM
 ΔΔ EPOXY COATED BARS

NOTE: DIMENSIONS FOR THE LOCATION OF THE DEFLECTED STRANDS ARE AT C-C BEAM AND END OF BEAM.

| | | | |
|-------------------------------|---|---|--|
| 07-10 LATEST REVISION DATE | <i>Norman C. McQuinn</i> APPROVED BY BRIDGE ENGINEER | | |
| | | STANDARD DESIGN - 30' ROADWAY, THREE SPAN BRIDGES PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES DECEMBER, 2006 | |
| C BEAM DETAILS | | H30-37-06 | |