



TEMPORARY RESIDENTIAL ACCESS

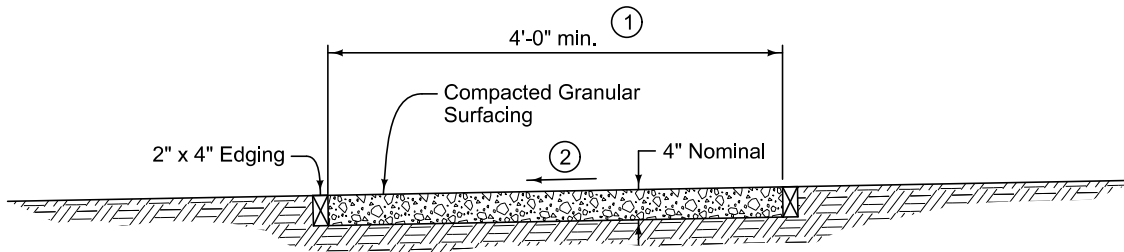

TEMPORARY GRANULAR SIDEWALK

- ① If sidewalk width is less than 5 feet, provide 5 foot long by 5 foot wide passing spaces at 200 foot intervals.
- ② Target cross slope of 1.5% with a maximum cross slope of 2%.

	REVISION		
	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%; text-align: center;">1</td> <td style="width: 50%; text-align: center;">10-18-16</td> </tr> </table>	1	10-18-16
	1	10-18-16	
SUDAS 11040.101 <small>SHEET 1 of 1</small>			
SUDAS Standard Specifications			
TEMPORARY GRANULAR SIDEWALK AND TEMPORARY RESIDENTIAL ACCESS			