IOWA AVIATION SYSTEM PLAN

AIRPORT SUMMARY REPORT

ANKENY REGIONAL AIRPORT

Prepared for:

IOWA DEPARTMENT OF TRANSPORTATION
OFFICE OF AVIATION

2004

Prepared by:

Snyder & Associates, Inc. and Wilbur Smith Associates, Inc.

"The preparation of this document was financed in part through a planning grant from the Federal Aviation Administration (FAA) as approved under the Airport and Airway Improvement Act of 1982. The contents of this report reflect the views of the Consultant, which is responsible for the facts and accuracy of the data depicted herein, and do not necessarily reflect the official views or policy of the FAA. Acceptance of this report by the FAA does not in any way constitute a commitment on the part of the United States to participate in any development depicted therein, nor does it indicate that the proposed development is environmentally acceptable in accordance with applicable public laws."

IOWA AVIATION SYSTEM PLAN - AIRPORT SUMMARY REPORT

This summary is intended to provide a general understanding of the specific information, findings and recommendations from the Iowa Aviation System Plan. An individual airport report was prepared for each public owned airport in Iowa.

INTRODUCTION

The Iowa Department of Transportation Office of Aviation, along with the System Plan Advisory Committee and consultant team, developed a strategic approach by which to identify and evaluate the needs of the Iowa aviation system within the period 2004 to 2024.

The Iowa aviation system is an integral component of the state's transportation network. The aviation system meets aviation and economic needs and links Iowa to the national transportation system. Aviation provides an important and efficient means of transportation for the movement of people and goods. The vision for the Iowa aviation system is to have safe, quality facilities and services that support transportation demands and meet economic development and quality of life needs in the state.

The primary goal of the system plan is to provide a framework that supports informed decisions related to planning and developing the Iowa aviation system. The objectives of this update of the Iowa Aviation System Plan are to:

- Identify and analyze aviation assets, including airspace, ground facilities and services, and needs of the state to assure that aviation performs its role in Iowa's economy and for its citizens.
- Provide continued guidance for development of a system of airports to meet the state's existing and future air transportation needs, projecting five, ten, and 20-year projects and giving guidance to meet needs.
- Build consensus among public policy makers, airport sponsors and users so that the plan's recommendations can be more readily accomplished.

Each airport was assigned to a functional classification. Facility and service objectives were developed for functional classifications. Based on existing facilities and services, recommendations were set forth for each airport.

SYSTEM GOALS

The following five goals and associated performance measures were identified and adopted to guide the Iowa aviation system development and establish the framework for the Iowa Aviation System Plan:

- **Development** – To provide an airport system that meets current and future customer needs.
- **Economic Support** – To promote an aviation system that sustains and enhances Iowa's economy.
- **Safety & Security** – To promote a safe and secure system of airports.
- **Accessibility** – To provide a system of airports that is accessible from both the ground and the air.
- **Education** – To support a system of airports that provides educational and career opportunities and promotes an understanding of the benefits of Iowa's air transportation system.

Performance Measure & Benchmark Summary

Performance Measure: Development

Benchmarks

- Airports meeting aircraft storage objectives
- Airports meeting aircraft parking objectives
- Airports meeting auto parking objectives
- Airports with Pavement Condition Index (PCI) rating of 70 or higher on primary runway
- Airports with current master plan or Airport Layout Plan (ALP)
- Airports included in a local comprehensive plan or with surrounding land use controls/zonings

Performance Measure: Economic Support

Benchmarks

- Airports with jet fuel
- Airports with a runway length of 5,500 feet or greater
- Airports with rental car services
- Airports with a courtesy car available
- Airports with a 24-7 fueling (credit card or FBO)
- Iowa employment within a 30-minute drive time of Commercial or Enhanced Service airport
- Employment growth counties within 30-minute drive time of Commercial or Enhanced Service airport
- Airports supporting air cargo
- Airports with aircraft maintenance

Performance Measure: Safety and Security

Benchmarks

- Airports with clear approaches to primary runway
- Airports with wildlife management plans
- Airports with emergency response plans
- Airports with perimeter fencing
- Airports with controlled access to airfield

Performance Measure: Accessibility

Benchmarks

- Airports with precision approaches
- Airports with any instrument approach
- Airports with approach lighting system (ALS)
- Airports with a precision approach and ALS
- Iowa's Population within 30 minutes of any system airport
- Iowa's population within 30 minutes of a Commercial or Enhanced Service airport
- Iowa's population within 30 minutes of a General Service airport
- Iowa's population within 30 minutes of an airport with a non-precision approach
- Iowa's population within 30 minutes of an airport with a precision approach
- Iowa's population within 30 minutes of an airport with onsite weather reporting equipment
- Iowa's population within 60 minutes of an airport with one or more scheduled commercial airlines
- Iowa's population within 120 minutes of an airport with two or more scheduled commercial airlines
- Iowa's population within 120 minutes of an airport with two or more scheduled commercial airlines or 60 minutes of an airport with one or more scheduled commercial airlines

Performance Measure: Education

Benchmarks

- Airports with on-site flight instruction
- Aviation related training programs connected with local schools
- Airports with public outreach/educational (following National Air Transportation Association (NATA,) National Business Aircraft Association (NBAA,) and Aircraft Owners and Pilots Association (AOPA) guidelines) programs, or hosting functions to bring the non-flying public to the airport

AIRPORT FUNCTIONAL ROLES

Airports within any transportation system contribute to meeting air transportation and economic needs in different ways and at varying levels. While each airport within a system contributes in some way, airports fill different roles. Because airports in the Iowa aviation system play different roles, their needs for facilities and services also vary accordingly.

With input from the Iowa DOT Office of Aviation and the System Plan Advisory Committee, each public owned airport in Iowa was assigned to one of five roles.

RECOMMENDED FUNCTIONAL AIRPORT ROLES

- **Commercial Service Airports** – these airports support some level of scheduled commercial airline service and they support a full range of general aviation aircraft to virtually all domestic and possibly some international destinations.
- **Enhanced Service Airports** – these airports support almost all general aviation aircraft, including most types of business jets; these airports generally serve as transportation centers and economic catalysts for the State.

  Facility and service objectives: 5,500' x 100' runway, parallel taxiway, precision approach, approach lighting, AWOS/ASOS, covered aircraft storage, jet and aviation fuel, full service FBO, and ground transportation
- **General Service Airports** – these airports support most twin and single engine general aviation aircraft and may experience occasional use by business jets. These airports support regional and in-state air transportation needs and local economic development.

  Facility and service objectives: 4,000' x 75' runway, partial parallel taxiway or turnarounds, non-precision approach, AWOS/ASOS, covered aircraft storage, jet and aviation fuel, limited service FBO, and ground transportation.
- **Basic Service Airports** – these airports support primarily single engine general aviation aircraft but may also sometimes accommodate smaller twin-engine general aviation aircraft. These airports support local air transportation, and special use aviation activities.

  Facility and service objectives: 3,000' x 60' runway (paved), 2,500' runway (turf), exits as needed, visual approach, covered aircraft storage, and aviation fuel.
- **Basis Service II Airports** – These airports support local air transportation, special use aviation activities, and may duplicate services in the area.

  No facility and service objectives are specified for these airports.

AIRPORT FACILITY AND SERVICE OBJECTIVE

Airport facility and service objectives were established for the functional roles. These objectives were developed with input from the Iowa DOT Office of Aviation and System Plan Advisory Committee. The facility and services objectives should not be considered a requirement or development standard. Current airport facilities and services were compared to the facility and service objectives. Where existing facilities and services do not meet or exceed the objectives, consideration may be given by the airport owner to develop future facility and services improvements. Development of some facilities would require local support and justification of need through development of an airport master plan or through the environmental documentation process.

No state or federal funding resources are guaranteed or committed by inclusion of specific facility and service improvements in this report.

Facility and service objectives for commercial service airports should, at minimum, equal those developed for enhanced service airports as well as recommendations set forth in a current Airport Master Plan.

Basic Service II airports should meet state minimum safety standards: Runway width 50', visual approach 20:1, wind indicator, and 24 hour public telephone. Additional facility and service objectives were not established for Basic Service II airports.

The following table sets forth the facility and service objectives for Enhanced Service, General Service, and Basic Service airports.

FACILITY AND SERVICE OBJECTIVES

	Enhanced Service Airports	General Service Airports	Basic Service Airports
Airport Reference Code (ARC)	C-II	B-II	B-I or Below
Runway Length (Primary)	Minimum 5,500 feet	Minimum Length 4,000 feet	3,000 feet Paved; 2500 feet Turf
Runway Width	100 feet	75 feet	60 feet Paved; 120 feet Turf
Taxiway	Full Parallel	Partial or Turnarounds	Exits as Needed
Approach	Precision	Non-Precision	Visual
Runway Lighting	MIRL/HIRL	MIRL	LIRL (Pilot Controlled)
Taxiway Lighting	MITL/HITL	LITL	Not An Objective
Weather Reporting	AWOS/ASOS	AWOS/ASOS	Not An Objective
Approach Aids	ALS	ALS	Not An Objective
Visual Guidance Slope Indicator (VGSI)	Both Runway Ends	Both Runway Ends	Not An Objective
Runway End Identifier Lights (REILS)	Both Runway Ends	Both Runway Ends	Not An Objective
Rotating Beacon	Rotating Beacon	Rotating Beacon	Not an Objective
Lighted Wind Indicator	Lighted Wind Indicator	Lighted Wind Indicator	Lighted Wind Indicator/Wind Sock
RCO Facilities	RCO Facilities	Not an Objective	Not an Objective
Other Pavement Strength	To Be Determined	To Be Determined	To Be Determined
Covered Storage	For 100% of Based Aircraft	100% of Based Aircraft	100% of Based Aircraft
Aircraft Apron	100% of Daily Transient	50% of Daily Transient	50% of Daily Transient
Terminal/Administration Bldg.	Yes	Not An Objective	Not An Objective
Auto Parking	Spaces equal to 100% of Based Aircraft (paved)	75% of Based Aircraft	50% of Based Aircraft
Fencing	Perimeter	Not An Objective	Not An Objective
Other	Building for Airport Maintenance Equipment	Not An Objective	Not An Objective
Fuel	100LL & Jet A - 24 Hour	100LL & Jet A 24 Hour (as needed)	100LL
FBO	Full Service - 24 Hour	Limited	Not An Objective
Ground Transportation	Rental Car, Taxi or Other	Courtesy Car/Off Site Rental Car	Not An Objective
Food Services	Vending	Vending	Not An Objective
Phone	Yes	Yes	Yes
Restroom	Yes	Yes	Yes
Pilot Lounge	Yes with Weather Reporting	Yes with Weather Reporting	Not An Objective
Security*	*	*	*
Snow Removal	Snow Removal	Snow Removal	Yes

*See the Iowa DOT Security Enhancement Guidelines.

Airports by System Role

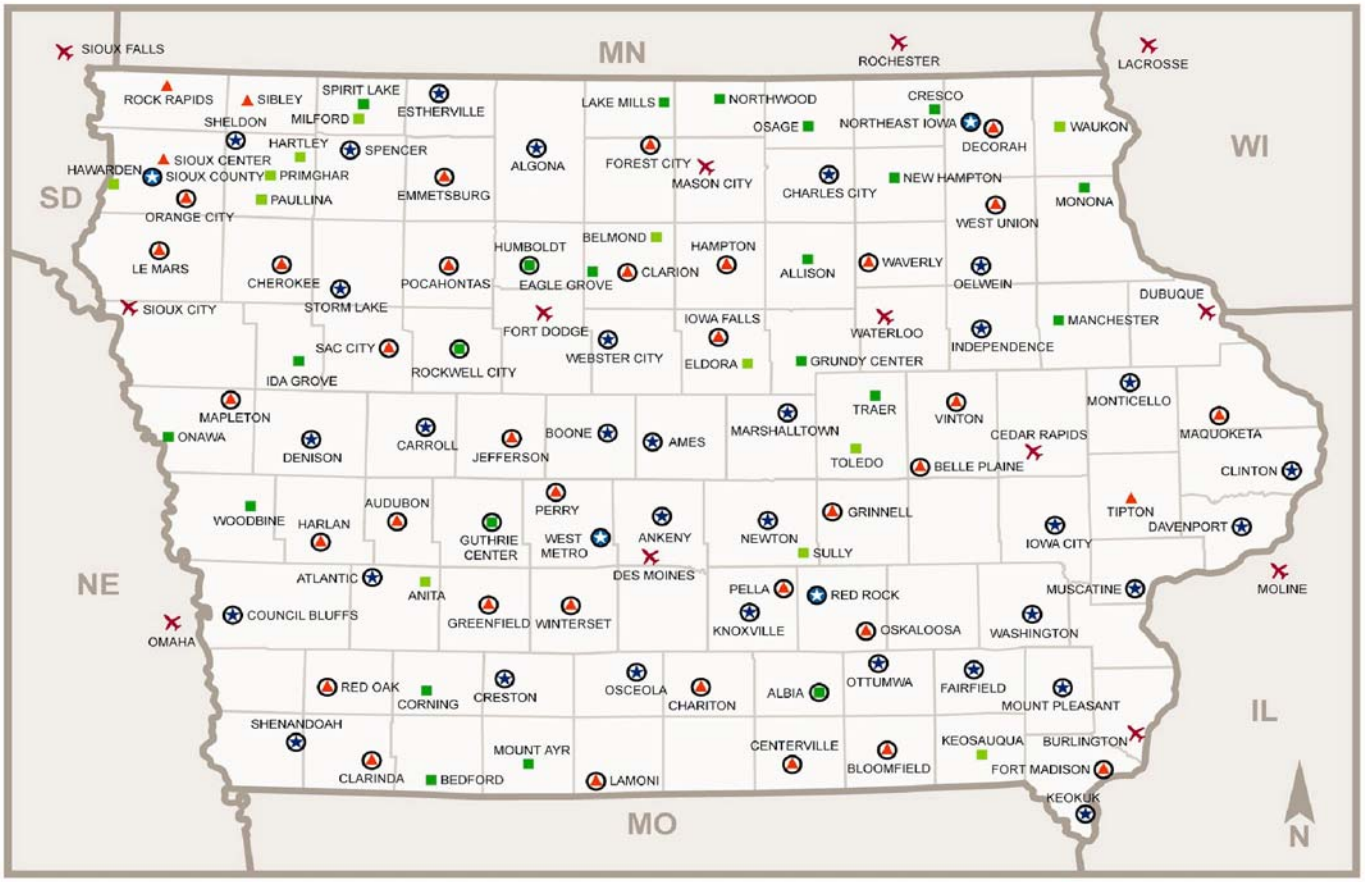

ANKENY REGIONAL AIRPORT (IKV)
INDIVIDUAL SUMMARY REPORT

The Ankeny Regional Airport is owned and operated by the Polk County Aviation Authority and is included in the National Plan of Integrated Airport Systems (NPIAS). The Authority was created in 1999 by Polk County and the cities of Altoona, Ankeny and Bondurant. The NPIAS designates the Ankeny Regional Airport as a general aviation reliever airport to the Des Moines International Airport. The Iowa Aviation System Plan identifies the Ankeny Regional Airport as an Enhanced Service airport.

General aviation airports in Iowa provide an important means of accessing the communities and regions they serve and provide a link to the national transportation system. The Ankeny Regional Airport serves the general aviation needs of the Polk County and Des Moines Metro area. The airport is utilized by single engine, twin engine, turboprop, and business jet aircraft along with helicopters. The airport offers a full time fixed-base operator (FBO) that offers fueling, aircraft maintenance, flight instruction, aircraft sales, and charter operations. The airport also offers aircraft parking and hangar storage.

A wide range of aeronautical activities occur at the Ankeny Airport including: personal travel, business travel both local and transient, just-in-time shipping, law enforcement, agricultural and medical transport.

LOCATION MAP

The Ankeny Regional Airport is located in Polk County approximately 4 miles north of the I-35/I-80 Northeast Systems Interchange. Local access from the interstate system is provided by the I-35/Oralabor Road (Exit 90) Interchange and the I-35/Corporate Woods Drive Interchange.

EXISTING FACILITIES

The Ankeny Regional Airport supports two runway facilities. Runway 18/36 is 5,500 feet in length and 100 feet in width. The concrete surfaced runways support a 30,000 dual wheel loading. Medium intensity edge and threshold lights are in place. Runways 18 and 36 are equipped with runway end identifier lights (REIL) and precision approach path indicators (PAPI).

Runway 4/22 is 4,200 feet in length and 75 feet in width. The runway is equipped with medium intensity runway lights (MIRL), runway end identifier lights (REIL), and precision approach path indicator lights (PAPI). The threshold on Runway 22 is displaced 630 feet in order to accommodate instrument straight –in night operations.

Runways 4/22 and 18/36 are served by a full parallel taxiway 35 feet in width. Airfield guidance signs are in place.

Runway 18/36 is equipped with a Localizer-(LOC), distance measuring equipment (DME) and glide slope facility. A precision instrument approach may be made to Runway 36. Non-precision instrument approaches may be made to Runways 18, 36 and 22. The following approaches were available as of 7-10-03:

ILS Runway 36,

RNAV (GPS) Runway 18,

RNAV (GPS) Runway 22, NDBA,

GPS Runway 36

The airport has a rotating beacon, segmented circle, lighted wind indicators and non-directional radio beacon (NDB). An Automated Weather Observing System (AWOS III) is located on the field.

Landside facilities include 60 tee hangar spaces and four conventional hangars providing storage for 35 aircraft. Two 6-unit tee hangars are being constructed in 2004. When completed, the airport will have storage space for 107 aircraft.

Hangar	Year Constructed	Aircraft Storage	Area
Tee	1995	10	11,700 square feet
Tee	1995	10	11,700 square feet
Tee	1997	10	11,700 square feet
Tee	1999	10	11,700 square feet
Tee	1999	10	11,700 square feet
Tee	2000	10	11,700 square feet
Conventional	1994	Maintenance-2	8,000 square feet
Conventional	1998	11	12,000 square feet
Conventional	1996	15	14,000 square feet
Conventional	1994	7	10,800 square feet

The FAA Flight Standards District office was located on the airport in 2001. An apron, 622 square yards, is used exclusively by FAA and can accommodate two to four itinerant aircraft.

The transient apron consists of 19,515 square yards of pavement and provides 21 tiedown spaces.

The two story terminal building was constructed in 1998. The 6,000 square foot structure provides a pilot briefing room, restrooms, telephone, pilot lounge, public lounge, vending machines and office space. The FBO occupies a number of the office spaces as well as rooms set aside for instruction. The facility provides two (2) conference rooms.

Fuel is stored in two 12,000 gallon above ground storage tanks. The 100LL and Jet A fuel is dispensed from two trucks.

There are 32 vehicle parking stalls located adjacent to the terminal building. In addition, there are 4 stalls located adjacent to the conventional hangar and 30 adjacent to the FAA Flight Standards District office.

A comprehensive land use plan was adopted by the City of Ankeny in 2004. The plan depicts land uses compatible with the airport. The City of Ankeny and Polk County have established zoning districts to implement the land use plan. A tall structures zoning ordinance has been adopted by the City of Ankeny, City of Des Moines and Polk County.

EXISTING SERVICES

Aeronautical services provided by the FBO include charter, aircraft rental, fuel (100LL, Jet A), power and airframe repair and pilot instruction. Two fuel trucks are used to dispense fuel. A Part 135 Charter operation is located on the airport.

The terminal building provides a pilot briefing room, restrooms, two conference rooms, offices, pilot lounge, public lounge, vending machines and other amenities. Off-site ground transportation is available.

ANKENY REGIONAL AIRPORT (IKV)

Federal Role: General Aviation Reliever Airport
State Role: Enhanced Service Airport

CURRENT AND FORECAST DEMAND

Since the airport became operational in 1993, the number of aircraft has increased significantly. There were 104 aircraft based at the airport in 2003. Of those, there were 82 single engine piston, nine multi-engine piston, eight turbo prop, two turbojet and three helicopters. The number of based aircraft is forecast to increase to no fewer than 119 in 2022.

There were an estimated 50,468 total annual operations conducted in 2003. The total number of operations is expected to increase to 64,147 in 2022.

Operational Activity	2003	2007	2012	2022
Based Aircraft	104	107	111	119
Annual Operations	50,648	54,252	59,673	64,147
Itinerant Operations	28,768	32,551	35,804	38,488
Local Operations	21,880	21,701	23,869	25,659

The based aircraft mix and aircraft operational mix are expected to change over the 20 year planning period. Reference may be made to Chapter Four of the 2004-2024 Iowa Aviation System Plan for additional forecast data regarding:

- Based aircraft mix
- Operational mix
- Annual Instrument Approaches
- Annual Instrument Operations

AIRPORT FACILITY AND SERVICE NEEDS

The Ankeny Regional Airport has been classified as an Enhanced Service airport and should provide facilities and services commensurate with its system role.

The following table summarizes current facilities and services, the airport's facility and service objectives, and actions/projects recommended to meet objectives within the context of the system plan. Local airports may have additional projects planned to accommodate local needs and demand.

Airside Facilities	Existing	System Objective	Recommendation
Airport Reference Code	C-II	C-II	None
Primary Runway Length	5,500'	5,500 min.	None
Primary Runway Width	100'	100'	None
Taxiway	Full Parallel	Full Parallel	None
Approach	Runway 36 ILS	Precision	None
Runway Lighting	MIRL	MIRL	None
Taxiway Lighting	MITL	MITL	None
Approach Aids	None	ALS	MALSR
Visual Guidance Slope Indicators (VGSI)	Runway18-36-PAPI	Both Ends	None
Runway End Identifier Lights (REIL)	Runway 18-36	Both Ends	None
Rotating Beacon	Yes	Rotating Beacon	None
Lighted Wind Indicator	Yes	Lighted Wind Indicator	None
RCO Facilities	Yes	RCO Facility	None
Pavement Strength	30,000 lb. DW	To be determined	60,000 lb DW
Landside			
Covered Storage	104	100 % Based Aircraft	12 units
Aircraft Apron	19,515 SY	100% Daily Transient	Expand apron 6,400 SY
Terminal/Admin Building	Yes	Yes	None
Auto Parking	102	Space equal to 100% based aircraft	30
Fencing	Yes	Perimeter	None
Storage	No	Building for maintenance	12,000 SF
Fuel	Yes	100LL, Jet A	None
FBO	Yes	FBO	None
Ground Transportation	Yes	Rental Car, Taxi, Other	None
Food Services	Yes	Vending	None
Phone	Yes	Phone	None
Restroom	Yes	Restroom	None
Pilot Lounge	Yes	Pilot Lounge	None
Security*	*	*	*
Snow Removal	Yes	Snow Removal	None
Other	Yes	De-Icing	None

*Security enhancements for each airport depend on the size and activity at the airport. Each airport is encouraged to complete a security plan that addresses security enhancements recommended by the Transportation Security Administration and the Iowa DOT.

SYSTEM DEVELOPMENT COSTS

Development Item	2004-2024
North apron expansion	$413,900
Storage-maintenance	$600,000
Storage - 12 units	$400,000
ALS-MALSR Runway 36	$560,000
Pavement overlay	$1,100,000
Total	**$3,073,900**

OTHER RECOMMENDATIONS

Airport improvements identified on the Airport Capital Improvement Program (ACIP) data sheets are noted as follows:

- Acquire in fee title 11 acres to accommodate RPZ extending beyond Runway 18
- Extend Runway 18 (500 x 100 feet); Taxiway B
- Expand apron in north terminal area 6,400 square yards
- Construct two -6 unit tee hangars in north terminal area
- Construct 12,000 square foot maintenance facility in north terminal area
- Construct airport access road to south terminal area
- Construct apron in south terminal area
- Acquire in fee title 83 acres beyond Runway 22 so as to provide for the RPZ, relocation of County Road and removal of the displaced threshold on Runway 22.
- Relocation of power transmission line
- Construction of Approach Light System to Runway 36
- Construct vehicle parking in north and south terminal areas.
- Provide pavement strength on critical pavements so as to accommodate a 60,000 pound dual wheel loading.

Consideration may be given to the establishment of a control tower facility within the long range planning horizon. The airport sponsor is also considering extension of the primary runway so as to accommodate business jet usage.

DEVELOPMENT COSTS - OTHER

Development Item	2004-2009
Land acquisition Runway 18	$862,000
Extend Runway 18	$724,000
South apron expansion	$1,760,000
Connecting Road	$1,300,000
Land acquisition Runway 22	$2,900,000
Relocate county road	$850,000
Relocate power line	$1,100,000
Total	**$9,496,000**

Snyder & Associates, Inc.

SNYDER & ASSOCIATES
Engineers and Planners

2727 SW Snyder Blvd.
Ankeny, Iowa 50023
Phone: 515.964.2020
Fax: 515.964.7938
www.snyder-associates.com

Wilbur Smith Associates, Inc.

ENGINEERS
PLANNERS
ECONOMISTS
Wilbur Smith Associates

6600 Clough Pike
Cincinnati, OH 45244
Phone: 513.233.3700
Fax: 513.624.5182
www.wilbursmith.com

Airport Summary Reports can be found on the Office of Aviation website: www.iawings.com