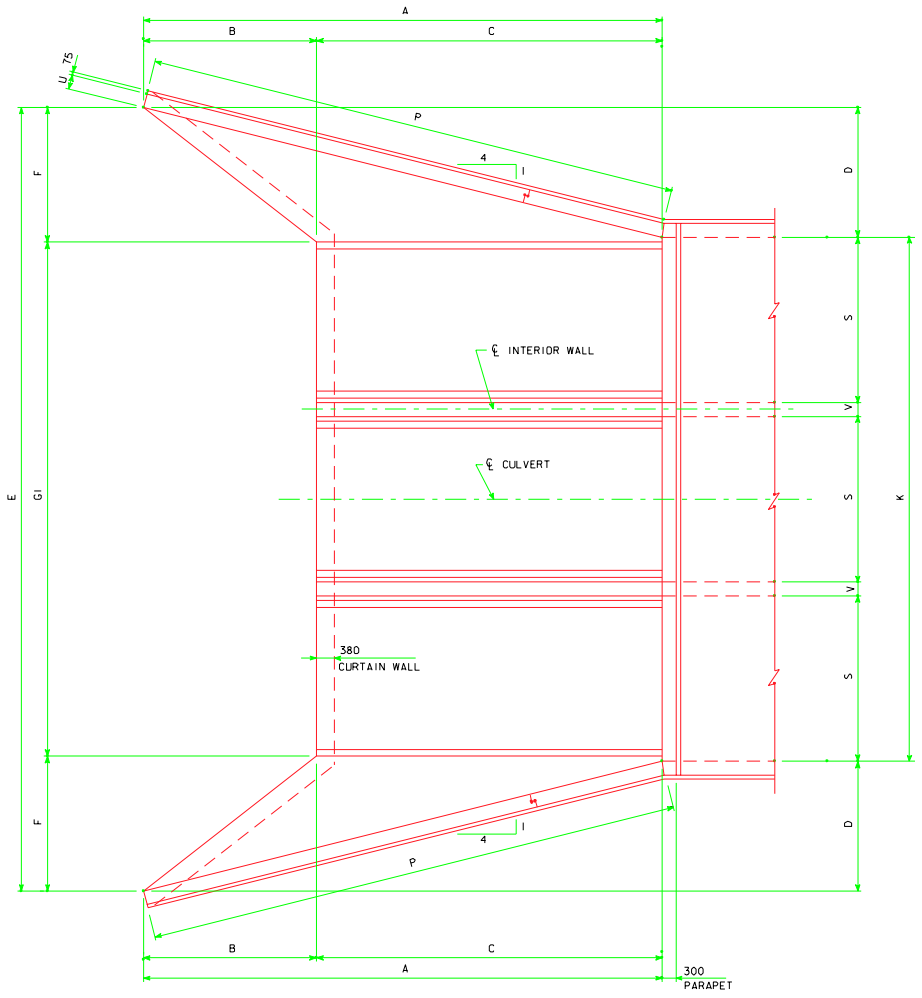

PLAN VIEW

DIMENSIONS TABLE

SxH	3600x3600	3600x3000	3600x2400	3600x1800	3000x3600	3000x3000	3000x2400	SxH
A	11 100	9300	7500	5700	11 100	9300	7500	A
B	3700	3100	2500	1900	3700	3100	2500	B
C	7400	6200	5000	3800	7400	6200	5000	C
D	2775	2325	1875	1425	2775	2325	1875	D
E	16 960	15 960	15 060	14 110	15 160	14 160	13 260	E
F	2875	2425	1975	1525	2875	2425	1975	F
G1	11 210	11 110	11 110	11 060	9410	9310	9310	G1
G2	11 582	11 480	11 478	11 425	9782	9680	9678	G2
G3	4686	3936	3186	2436	4686	3936	3186	G3
G4	4952	4079	3330	2522	4952	4079	3330	G4
G5	80	193	193	246	80	193	193	G5
K	11 410	11 310	11 310	11 260	9610	9510	9510	K
P	11 442	9586	7731	5875	11 442	9586	7731	P
R1	12 025	10 075	8125	6175	12 025	10 075	8125	R1
R2	8102	6762	5423	4085	8102	6762	5423	R2
T	355	355	355	355	330	330	330	T
U	305	255	255	230	305	255	255	U
V	305	255	255	230	305	255	255	V
W	1500	1350	1200	1050	1500	1350	1200	W

NOTES:

1. SEE SHEET MTRRCB-G1-94 FOR GENERAL INFORMATION, SPECIFICATIONS, AND DESIGN STRESSES.
2. SEE SHEET MTRH 0-2-94 AND MTRH-3-94 FOR LOCATION OF CERTAIN DIMENSIONS TABULATED.
3. SEE SHEET MTRH 0-5-94 FOR HEADWALL NOTES.

LATEST REVISION DATE : 04-02

APPROVED BY :

STANDARD DESIGN

FLARED WING HEADWALLS

FOR

TRIPLE REINFORCED CONCRETE BOX CULVERTS

PROJECT DEVELOPMENT DIVISION

IOWA DEPARTMENT OF TRANSPORTATION

DECEMBER, 1994

MTRH 0-1-94

REVISED 04-02 - CHANGED DIMENSIONS IN DIMENSIONS TABLE.

TRH01M.SOI

XXXXXXXXXXSYSTEMTIME XXXXXXXUSERNAME XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXDGNSPEC