



PLAN VIEW

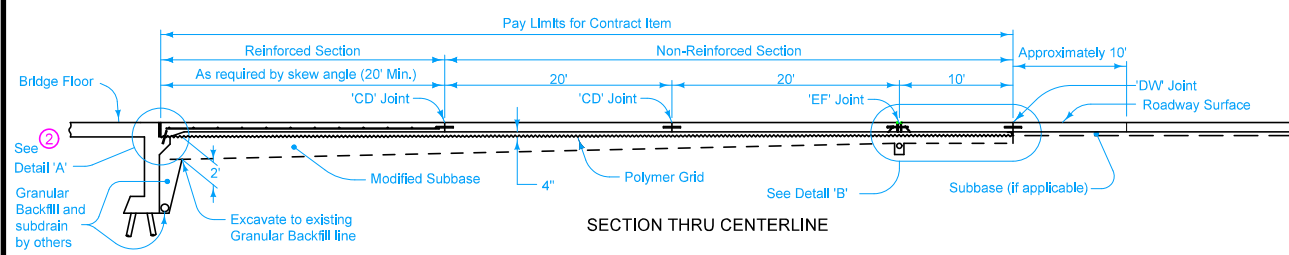

SECTION THRU CENTERLINE

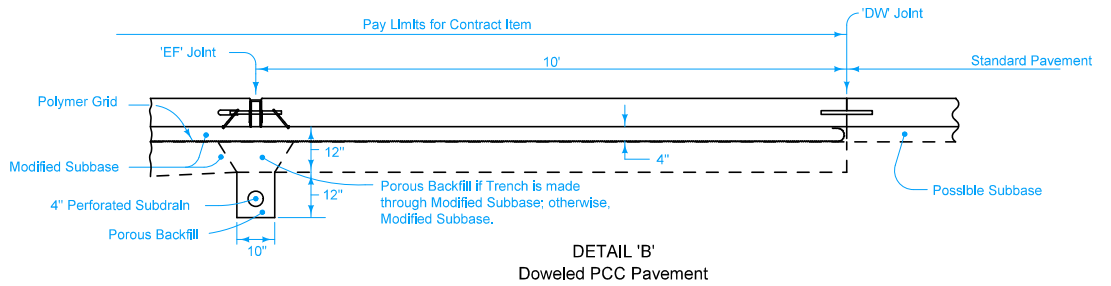

DETAIL 'B'
Doweled PCC Pavement

For joint details, see PV-101.

- ① Build curb to end of Reinforced Bridge Approach Section. See Curb Location Details (Section B-B on BR-101).
- ② See BR-101.
- ③ Longitudinal Joint (PV-101):
Single Pour - Saw cut joint per Detail B.
Two Pours - Use 'KS-1' joint.
- ④ 'CD' Joints required up to 300 feet each way from end of Reinforced Bridge Approach Section.
- ⑤ Excavation limits of Modified Subbase 2 feet outside of pavement edge, see BR-101.
- ⑥ Slope subdrain to drain.
- ⑦ Place an "X" in the plastic concrete near the 'EF' joint at the outside edge of pavement.
- ⑧ Place 'RD' joint where PCC shoulder. Place 'B' joint otherwise.

Possible Contract Item:
Bridge Approach, Two Lane

Possible Tabulation:
112-6

	REVISION
	1 10-17-17
STANDARD ROAD PLAN	BR-102
SHEET 1 of 1	
REVISIONS: Changed DR-304 to DR-306.	
 APPROVED BY DESIGN METHODS ENGINEER	
BRIDGE APPROACH SECTION (TWO-LANE, ABUTTING PCC PAVEMENT)	